


US Hwy 90/98 Bay Bridge/Cochrane-Africatown Rd. Bridge (Mile 2.9)

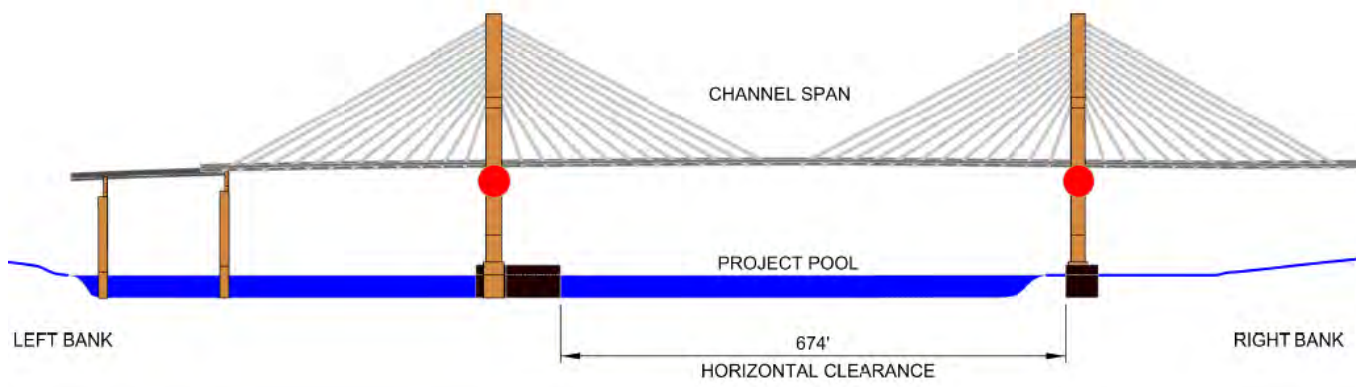

LOOKING DOWNSTREAM VIEW

PROJECT POOL STAGE	
DATUM	ELEV.
NGVD 29	0.00
NAVD 88	0.04

CHANNEL SPAN						
VERTICAL DATUM	NGVD 29			NAVD 88		
LOCATION	LEFT LIGHT	CENTER	RIGHT LIGHT	LEFT LIGHT	CENTER	RIGHT LIGHT
ELEVATION OF LOW STEEL	144.6	146.6	144.6	144.6	146.6	144.6
VERT. CLEARANCE AT PROJECT POOL STAGE	144.6	146.6	144.6	144.6	146.6	144.6

NOTE: ALL UNITS ARE IN FEET

Horizontal Clearances were measured between piers above the water. The clearance below the water may be less than what is shown above. The water depth as shown is only a graphic representation for visual purposes. No field work has been performed to determine the depth of water.

Chart No.	River	Description	River Mile	Low Steel Elevation	Clearance (At Pool M.S.L of 0')
1	MOBILE	U.S. HIGHWAY 90/98 (BAY BRIDGE/COCHRANE-AFRICATOWN ROAD) BRIDGE	2.9	144.6	144.6
1	MOBILE	TRANSMISSION LINE	3	174.5	174.5
1	CHICKASAW CREEK	LOUISVILLE & NASHVILLE RAILROAD BRIDGE (SWING SPAN)	3.2	NA	NA