TYPE II MONITORING WELL INSTALLATION DIAGRAM

LAW ENVIRONMENTAL, INC.
GOVERNMENT SERVICES DIVISION
KENNESAW, GEORGIA


 JOB NAME
 DDMT

 WELL NO.
 MW-12
 JOB NO.
 11-8531-01

 DATE
 3-17-89
 TIME
 1700

 WELL LOCATION
 DUNN FIELD

| GROUND SURFACE ELEVATION301.40 ft. | BENTONITE TYPE1/4" PELLETS |
|--|---|
| TOP OF SCREEN ELEVATION232.00 ft. | MANUFACTURER PEL PLUG |
| REFERENCE POINT ELEVATION 301.40 ft. | CEMENT TYPE PORTLAND TYPE 1 |
| TYPE SAND PACK SILICA SAND GRADATION 20/40 | MANUFACTURER LONE STAR BOREHOLE DIAMETER 7 1/4" |
| SAND PACK MANUFACTURER GRANUSIL | SCREEN DIAMETER 2'' SLOT SIZE 0.010" |
| SCREEN MATERIAL PVC SCH. 40 MANUFACTURER ATLANTIC SCREEN CO. | LAW ENVIRONMENTAL, INC. FIELD REPRESENTATIVER M |
| RISER MATERIAL PVC SCH. 40 | DRILLING CONTRACTOR TRI-STATE TESTING |
| MANUFACTURERATLANTIC SCREEN CO. RISER DIAMETER2'' | AMOUNT BENTONITE USED 1 BUCKET |
| | AMOUNT CEMENT USED 40 BAGS @ 9416s./BAG |
| DRILLING TECHNIQUE HOLLOW STEM AUGER AUGER SIZE AND TYPE 7" CMF HOLOW STEM AUGER | AMOUNT SAND USED 2 BAGS @ 100lbs/BAG STATIC WATER DEPTH (after dev.) 71.6 |
| | STATIO WATER DEPTH (aner dev.) 71.0 |

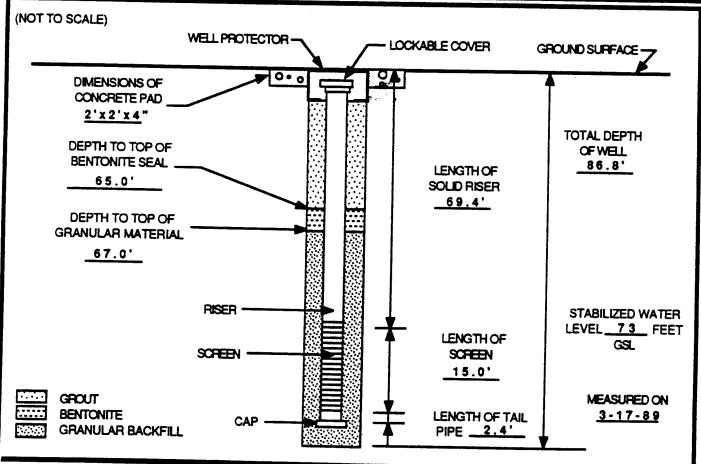

| QA / QC | INSTALLED BY:CN | INSTALLATION OBSERVED BY: | RM |
|---------|-----------------|---------------------------|----|
| | DISCREPANCIES: | NONE | |
| | | | |