


TYPE II MONITORING WELL INSTALLATION DIAGRAM

LAW ENVIRONMENTAL, INC.
GOVERNMENT SERVICES DIVISION
KENNESAW, GEORGIA

JOB NAME DDMT
WELL NO. MW-13 JOB NO. 11-8531-01
DATE 3-20-89 TIME 1700
WELL LOCATION DUNN FIELD

| | |
|--|---|
| GROUND SURFACE ELEVATION <u>299.95</u> ft. | BENTONITE TYPE <u>1/4" PELLETS</u> |
| TOP OF SCREEN ELEVATION <u>233.95</u> ft. | MANUFACTURER <u>PEL PLUG</u> |
| REFERENCE POINT ELEVATION <u>299.95</u> ft. | CEMENT TYPE <u>PORTLAND TYPE 1</u> |
| TYPE SAND PACK <u>SILICA SAND</u> GRADATION <u>20/40</u> | MANUFACTURER <u>LONE STAR</u> |
| SAND PACK MANUFACTURER <u>GRANUSIL</u> | BOREHOLE DIAMETER <u>7 1/4"</u> |
| SCREEN MATERIAL <u>PVC SCH. 40</u> | SCREEN DIAMETER <u>2"</u> SLOT SIZE <u>0.010"</u> |
| MANUFACTURER <u>ATLANTIC SCREEN CO.</u> | LAW ENVIRONMENTAL, INC. |
| RISER MATERIAL <u>PVC SCH. 40</u> | FIELD REPRESENTATIVE <u>RM</u> |
| MANUFACTURER <u>ATLANTIC SCREEN CO.</u> | DRILLING CONTRACTOR <u>TRI-STATE TESTING</u> |
| RISER DIAMETER <u>2"</u> | AMOUNT BENTONITE USED <u>1 BUCKET</u> |
| DRILLING TECHNIQUE <u>HOLLOW STEM AUGER</u> | AMOUNT CEMENT USED <u>13 BAGS @ 94lbs/BAG</u> |
| AUGER SIZE AND TYPE <u>7" CMF HOLLOW STEM AUGER</u> | AMOUNT SAND USED <u>2 BAGS @ 100lbs/BAG</u> |
| | STATIC WATER DEPTH (after dev.) <u>69.0</u> |

(NOT TO SCALE)

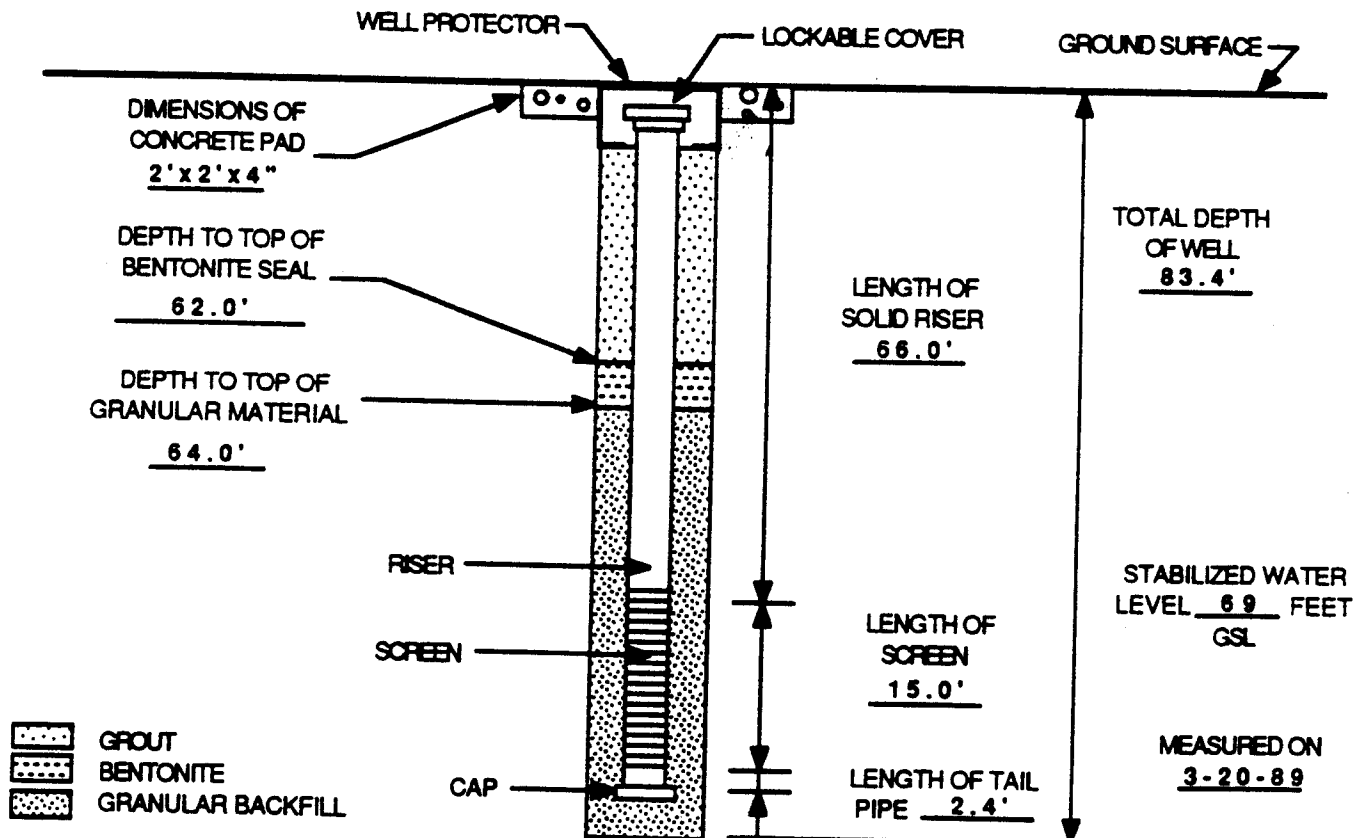

QA / QC

INSTALLED BY: CN INSTALLATION OBSERVED BY: RM
DISCREPANCIES: NONE