


Standard Flush Mount

Built By Boart Longyear

Well Coordinates _____

DEPTH BGS

Elevation _____
Depth BGS _____

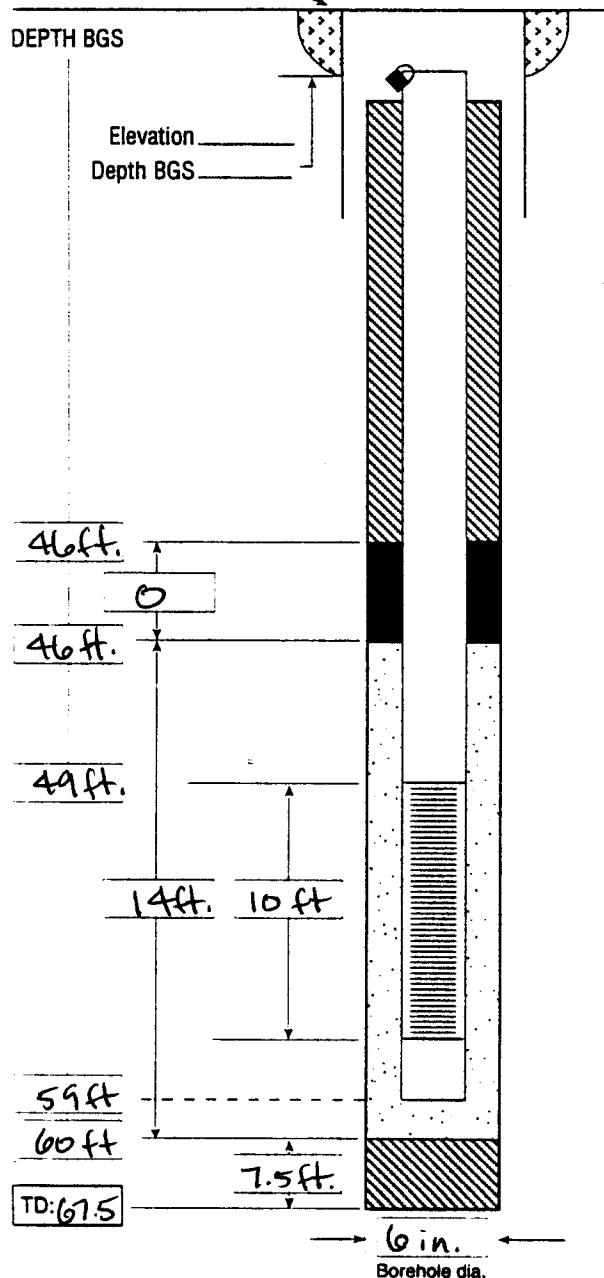

Material / Type Steel
 Diameter 4 inch Water Tight Seal (Y / N)
 Depth BGS _____ Weep Hole (Y / N)

Composition & Size Concrete

Type Schedule 40 PVC
Diameter 2 inch
Total Length (TOC to TOS) 49 ft.

Composition & Proportions High Solids (30%)
Bentonite clay - PureGild
 Tremied ☒ (N)
 Interval BGS 0 ft. - 46 ft.

Depth(s) BGS _____

Type N/A
Source _____
HydrationTime _____ Volume of Fluid Added _____
Tremied (Y / N) _____

Type Sand 20/40
Amount Used 4 50# bags
Tremied (Y (N))
Source The Morice Company
Gr. Size Dist. Grade 00N

Type Schedule 40 PVC
Diameter 2 inch
Slot Size & Type 0.010
Interval BGS 49 ft. - 59. ft.

Material bentonite pellets
Hydration Time _____
Tremied (Y / N)