


CHM HILL MONITORING WELL CONSTRUCTION LOG

Standard Flush Mount

256 171

Installation 00MT
 Site Eastern Edge of Main Installation
 Project Number 113630.01.22
 Drilling Contractor Boart Longyear
 Built By Boart Longyear

Well Number MW-50 (F)
 Client/Project DDMT Groundwater Inv.
 Starting 11/26 JAN 96 time 1045
 Completion 12/25 time _____
 Well Coordinates _____

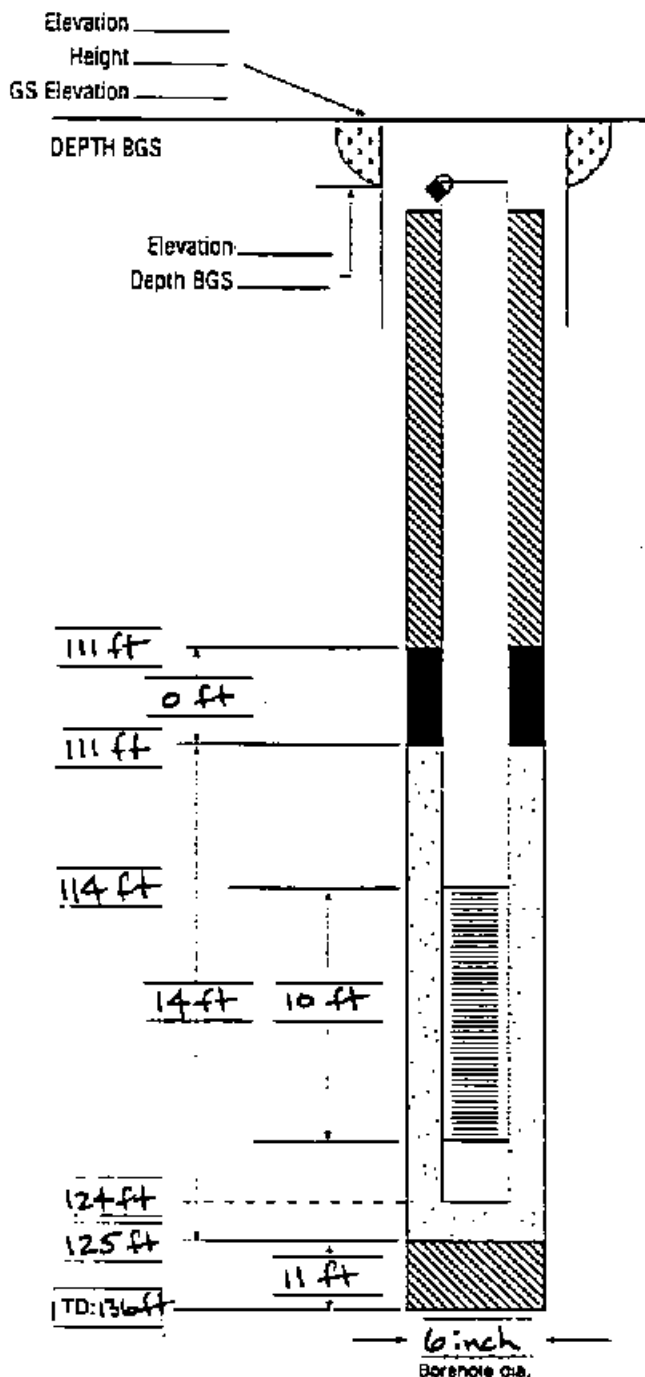

PROTECTIVE CSG
 Material / Type Steel
 Diameter 4 inch Water Tight Seal ☒ (Y/N)
 Depth BGS _____ Weep Hole (Y/N)

SURFACE PAD
 Composition & Size Asphalt

RISER PIPE
 Type Schedule 40 PVC
 Diameter 2 inch
 Total Length (TOC to TOS) 114 ft

GROUT
 Composition & Proportions High Solids (30%)
Bentonite Clay - PureGold
 Tremied ☒ (Y/N)
 Interval BGS 0 ft to 111 ft

CENTRALIZERS (Y/N)
 Depth(s) BGS _____

SEAL
 Type N/A
 Source _____
 Hydration Time _____ Volume of Fluid Added _____
 Tremied (Y/N)

FILTER PACK
 Type 20/40 Silica Sand
 Amount Used 4 50# bags
 Tremied ☒ (Y/N)
 Source The Morie Company
 Gr. Size Dist. Grade 00N

SCREEN
 Type Schedule 40 PVC
 Diameter 2 inch
 Slot Size & Type 0.010 inch
 Interval BGS 114 ft to 124 ft

BACKFILL PLUG
 Material Bentonite Pellets
 Hydration Time _____
 Tremied (Y/N) ☒