


WELL CONSTRUCTION DETAILS AND ABANDONMENT FORM

FIELD REPRESENTATIVE: Chris Hickman TYPE OF FILTER PACK: DSI Silica Sand
 GRADATION: #12
 DRILLING CONTRACTOR: Boart Longyear AMOUNT OF FILTER PACK USED: 5 bags (250lbs)
 DRILLING TECHNIQUE: Sonic TYPE OF BENTONITE: Pell-Plug 3/8" pellets
 AUGER SIZE AND TYPE: 6" casing w/bit AMOUNT BENTONITE USED: 1 bucket
 BOREHOLE IDENTIFICATION: MW-63A TYPE OF GROUT: Portland Cement/Bentonite
 BOREHOLE DIAMETER: 6" AMOUNT CEMENT USED: 18-94lb bags Portland 2 1/2 bags Bentonite
 WELL IDENTIFICATION: MW-63A GROUT MATERIALS USED: _____
 WELL CONSTRUCTION START DATE: 7-23-02
 WELL CONSTRUCTION COMPLETE DATE: 7-24-02 DIMENSIONS OF SECURITY BOX: _____
 SCREEN MATERIAL: 2" sch 40 PVC TYPE OF WELL CAP: Expansion plug
 SCREEN DIAMETER: 2" TYPE OF END CAP: Flush thread plug
 SLOT SIZE (% Open Area): 10 slot
 STRATUM-SCREENED INTERVAL (FT): 140-130' 8" COMMENTS: _____
 CASING MATERIAL: PVC 2" sch 40
 CASING DIAMETER: 2"

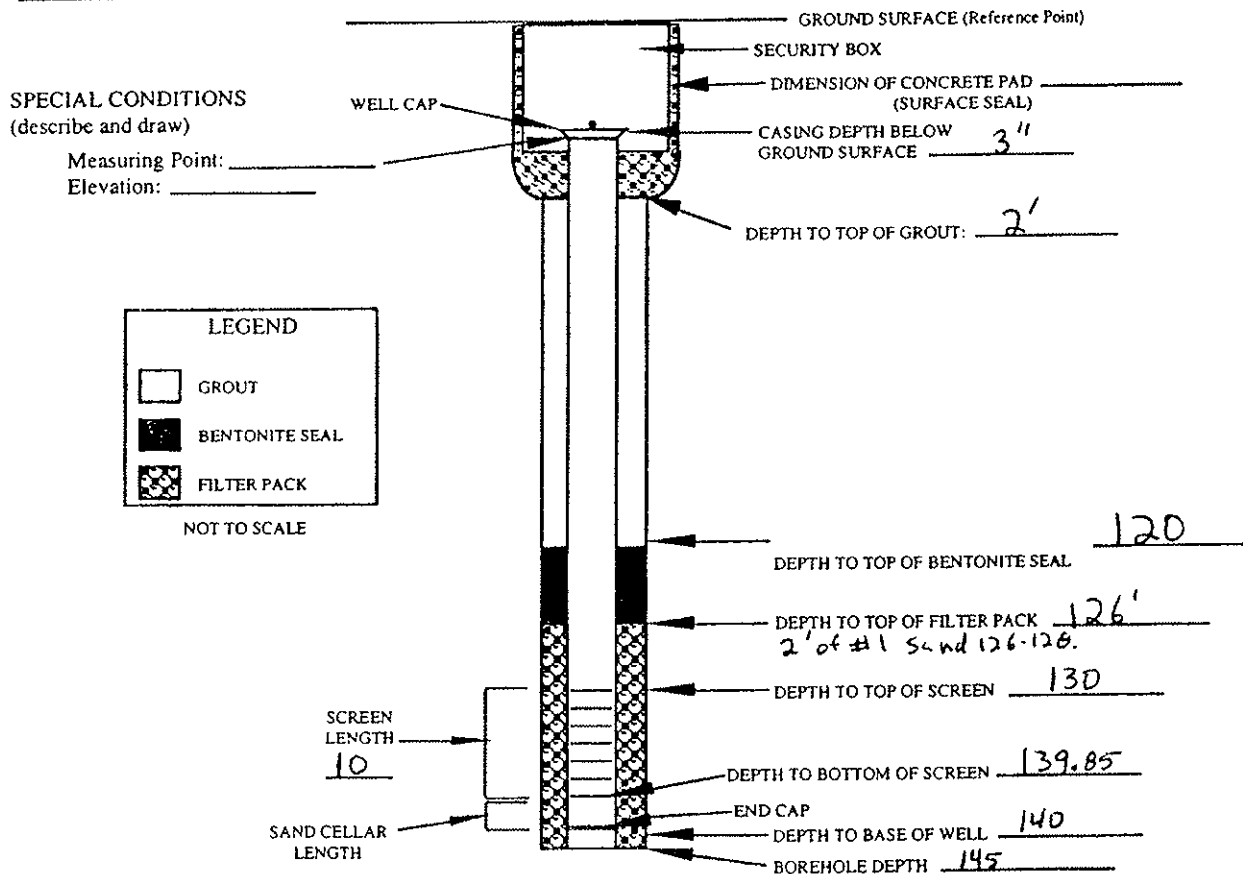

INSTALLED BY: Chris Hickman INSTALLATION OBSERVED BY: K Smith
 DISCREPANCIES: _____