



PROJECT NUMBER
147543.FI.01

WELL NUMBER
MW-75

SHEET 1 OF 1

WELL COMPLETION DIAGRAM

PROJECT : Dunn Field DNAPL Investigation

LOCATION : Memphis, Tennessee

DRILLING CONTRACTOR : Boart Longyear


DRILLING METHOD AND EQUIPMENT USED : Hollow Stem Auger 4.25 inch ID

WATER LEVELS : 79.15 feet BTOC (01/2001)

START : 11/10/2000

END: 11/10/2000

LOGGER : Bryan Burkingstock

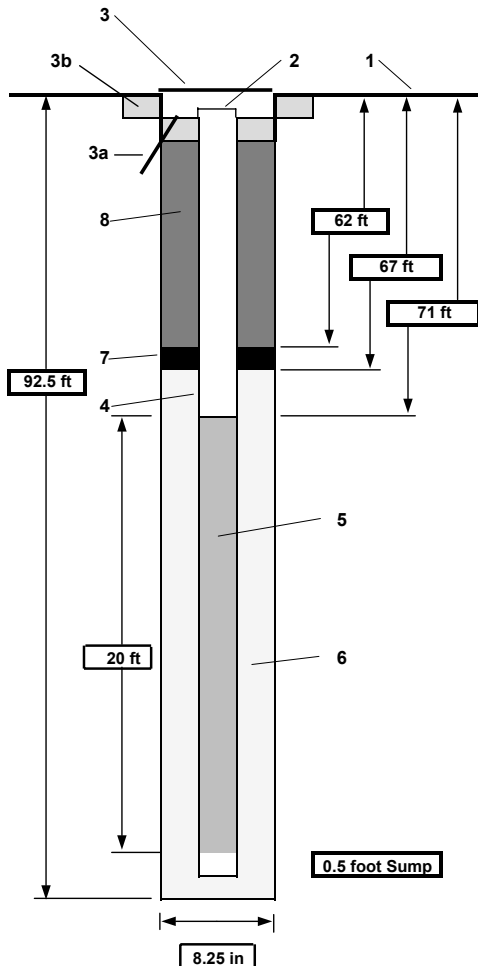

Note: Diagram not to scale.

1- Ground elevation at well	304.3 feet MSL
2- Top of casing elevation	303.61 feet MSL
3- Wellhead protection cover type	Flush mount vault
a) drain tube?	no
b) concrete pad dimensions	3 ft x 3 ft
4- Dia./type of well casing	2-inch PVC
5- Type/slot size of screen	0.010 slot PVC
6- Type screen filter	#2 filter sand
a) Quantity used	bags
7- Type of seal	Bentonite chips
a) Quantity used	bags
8- Grout	
a) Grout mix used	90% Portland Grout, 10% bentonite powder
b) Method of placement	Tremie Method
c) Vol. of well casing grout	
Development method	Surge & pump with an electrical, centrifugal, in-line pump.
Development time	4 hour
Estimated purge volume	220 gallons
Comments	Grout weight = lbs/gal
Total Depth (BTOC) =	92.5 feet
Final field parameters collected during well development (11/11/00):	
pH =	
conductivity =	mS/cm
temperature =	°C