




PROJECT NUMBER 160492.SA.03	WELL NUMBER MW-94	SHEET 1 OF 1
WELL COMPLETION DIAGRAM		

PROJECT : Long Term Operational Areas - Memphis Depot LOCATION : Memphis, Tennessee
 DRILLING CONTRACTOR : Tri-State Testing Services, Inc.
 DRILLING METHOD AND EQUIPMENT USED : Hollow Stem Auger 4.25 inch ID with CME Sampler
 WATER LEVELS : 107.07 feet BTOC (11/2001) START : 09/25/2001 END: 09/26/2001 LOGGER : Jay Parker (Jacobs)

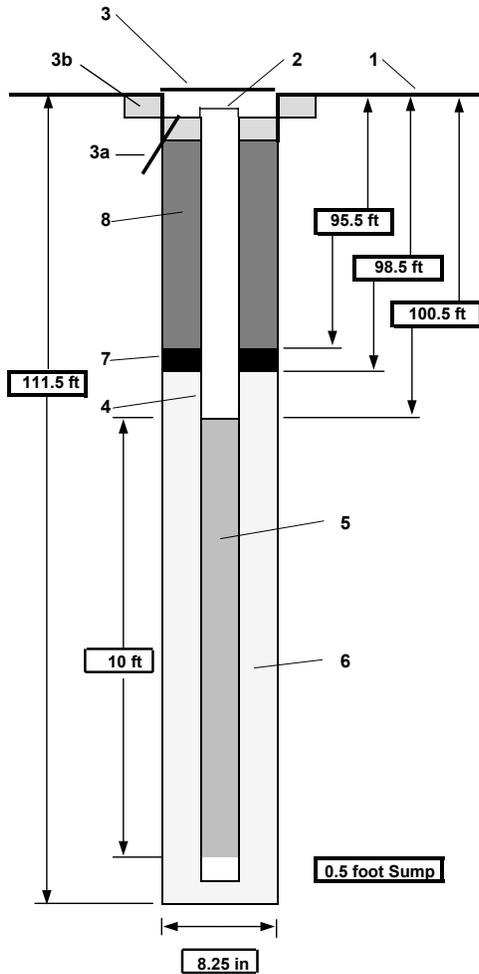

Note: Diagram not to scale.

1- Ground elevation at well	296.95 feet MSL
2- Top of casing elevation	296.94 feet MSL
3- Wellhead protection cover type	Flush mount vault
a) drain tube?	no
b) concrete pad dimensions	3 ft x 3 ft x 6 in
4- Dia./type of well casing	2-inch Sch. 40 PVC
5- Type/slot size of screen	2-inch 0.010 slotted PVC
6- Type screen filter	#2 filter sand
a) Quantity used	bags
7- Type of seal	Bentonite chips
a) Quantity used	bags
8- Grout	
a) Grout mix used	90% Portland Grout, 10% bentonite powder
b) Method of placement	Tremie Method
c) Vol. of well casing grout	
Development method	Disposal Bailer
Development time	Hand Bailed
Estimated purge volume	5 gallons
Comments	Total Depth (BGS) = 111 feet Completed based on LTOA workplan (2001) specifications.
Final field parameters collected during well development (11/19/2001):	
	pH = 5.89
	conductivity = 0.310 mS/cm
	temperature = 19.1 °C
	Dissolved Oxygen = 5.2 mg/l
	Turbidity = > 999 NTU