



PROJECT NUMBER  
160492.SA.03

WELL NUMBER  
MW-97

SHEET 1 OF 1

## WELL COMPLETION DIAGRAM

PROJECT : Long Term Operational Areas - Memphis Depot

LOCATION : Memphis, Tennessee

DRILLING CONTRACTOR : Tri-State Testing Services, Inc.


DRILLING METHOD AND EQUIPMENT USED : Hollow Stem Auger 4.25 inch ID with CME Sampler

WATER LEVELS : 101.25 feet BTOC (11/2001)

START : 10/01/2001

END: 10/03/2001

LOGGER : Adam Kaiser (Jacobs)

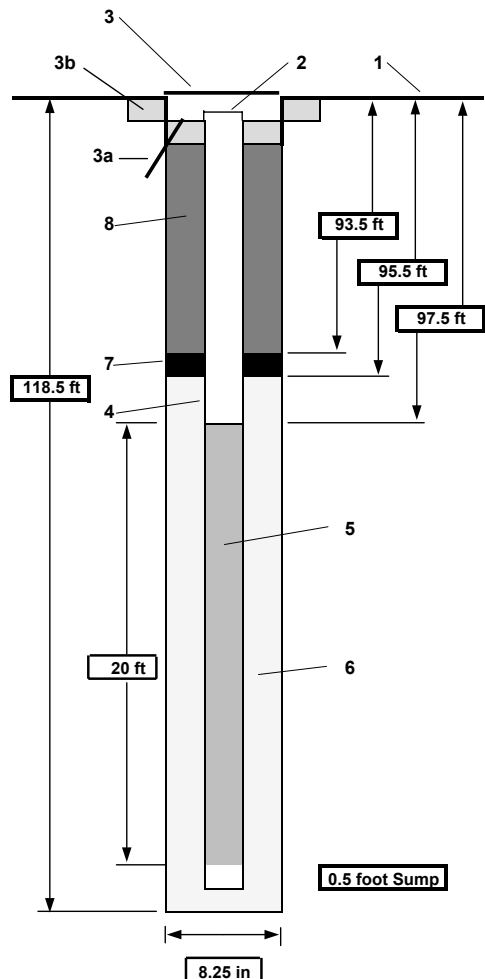

Note: Diagram not to scale.

1- Ground elevation at well	297.70 feet MSL
2- Top of casing elevation	297.44 feet MSL
3- Wellhead protection cover type	Flush mount vault
a) drain tube?	no
b) concrete pad dimensions	3 ft x 3 ft x 6 in
4- Dia./type of well casing	2-inch Sch. 40 PVC
5- Type/slot size of screen	2-inch 0.010 slotted PVC
6- Type screen filter	#2 filter sand
a) Quantity used	bags
7- Type of seal	Bentonite chips
a) Quantity used	bags
8- Grout	
a) Grout mix used	90% Portland Grout, 10% bentonite powder
b) Method of placement	Tremie Method
c) Vol. of well casing grout	
Development method	Surge & pump with an electrical, centrifugal, in-line pump.
Development time	4 hour
Estimated purge volume	72 gallons
Comments	Total Depth (BGS) = 118 feet Completed based on LTOA workplan (2001) specifications.
Final field parameters collected during well development (10/22/2001):	
pH =	6.41
conductivity =	0.162 mS/cm
temperature =	21.14 °C
Dissolved Oxygen =	5 mg/l
Turbidity =	19 NTU