



**US Army Corps
of Engineers®**

Mobile District

**ALABAMA-COOSA-TALLAPOOSA
RIVER BASIN
WATER CONTROL MANUAL
Final**

APPENDIX D

**H. NEELY HENRY DAM AND LAKE
(Alabama Power Company)
TALLAPOOSA RIVER, ALABAMA**

**U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT
MOBILE, ALABAMA**

**JANUARY 1979
REVISED MAY 2015
REVISED APRIL 2022**

WATER CONTROL MANUAL

APPENDIX D

H. NEELY HENRY DAM AND LAKE

ALABAMA-COOSA-TALLAPOOSA RIVER

BASIN

ALABAMA POWER COMPANY



U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT/SOUTH ATLANTIC DIVISION
MOBILE, ALABAMA

January 1979
Revised May 2015
Revised April 2022

Distribution authorized to U.S. Government agencies only due to the sensitivity of reservoir regulation plan, 5 December 2012. Non-U.S. Government agency requests shall be referred to the U.S. Army Corps of Engineers, Mobile District/South Atlantic Division, Chief of Water Management, P.O. Box 2288, Mobile, Alabama 36628.

FOR OFFICIAL USE ONLY



H. Neely Henry Dam and Lake

NOTICE TO USERS OF THIS MANUAL

Regulations specify that this Water Control Manual be published in a hard copy binder with loose-leaf form, and only those sections, or parts thereof; requiring changes will be revised and printed. Therefore, this copy should be preserved in good condition so that inserts can be made to keep the manual current. Changes to individual pages must carry the date of revision, which is the South Atlantic Division's approval date.

Regulations specify that this Water Control Manual be published in digital form in the central repository located at the following link:

<https://maps.crrel.usace.army.mil/apex/f?p=875>

The Water Control Manual at the central repository will be considered the official manual and will be kept current at all times. Instructions and information to upload or document the review status of the Water Control Manual, as per ER 1110-2-240, in the central repository portal can be found under the help tab in the portal.

It is not unexpected that USACE Corporate Information may move the central repository link to a new location. This information will be shared with all offices if a situation occurs by the HQUSACE.

REGULATION ASSISTANCE PROCEDURES

If unusual conditions arise, contact can be made with the Water Management Section, Mobile District Office by phoning (251) 690-2730 during regular duty hours and (251) 509-5368 during non-duty hours. The Alabama Power Company Alabama Control Center Hydro Desk can be reached at (205) 257-4010 during regular duty hours.

METRIC CONVERSION

The values presented in the text are shown in English units only. Exhibit B contains a conversion table that can be used for metric units.

MEMORANDUM OF UNDERSTANDING

The H. Neely Henry Dam and Lake Project will be operated during floods and in support of navigation downstream in accordance with regulations prescribed by the Secretary of the Army and published in the Code of Federal Regulations, Title 33, Chapter II, Part 208, Section 208. A Memorandum of Understanding (MOU) concerning the operation of the H. Neely Henry development has been adopted by the Alabama Power Company (APC) and the U.S. Army Corps of Engineers (herein referred to as USACE or Corps). The purpose of the MOU is to primarily clarify the responsibilities of the two agencies with regard to the operation of the project for flood control (now termed flood risk management) and to provide direction for the orderly exchange of hydrologic data. A copy of the MOU is included in this manual as Exhibit C.

U.S. Army Corps of Engineers, Mobile District, South Atlantic Division

April 2022

TABLE OF CONTENTS

	Page
TITLE PAGE	i
PHOTOGRAPH	ii
NOTICE TO USERS OF THIS MANUAL	iii
REGULATION ASSISTANCE PROCEDURES	iii
METRIC CONVERSION	iii
MEMORANDUM OF UNDERSTANDING	iii
TABLE OF CONTENTS	iv
PERTINENT DATA	xii
TEXT OF MANUAL	1-1

Paragraph	Title	Page
1 - INTRODUCTION		1-1
1-01.	Authorization.	1-1
1-02.	Purpose and Scope.	1-1
1-03.	Related Manuals and Reports.	1-1
1-04.	Project Owner.	1-2
1-05.	Operating Agency.	1-2
1-06.	Regulating Agencies.	1-2
1-07.	Vertical Datum.	1-2
2 - DESCRIPTION OF PROJECT		2-1
2-01.	Location.	2-1
2-02.	Purpose.	2-1
2-03.	Physical Components.	2-2
a.	Dam.	2-2
b.	Earth Dikes.	2-2
c.	Spillway	2-2
d.	Reservoir.	2-3
e.	Powerhouse and Penstocks.	2-3
2-04.	Related Control Facilities.	2-3

2-05. Public Facilities.	2-3
3 - HISTORY OF PROJECT	3-1
3-01. Authorization.	3-1
3-02. Planning and Design.	3-2
3-03. Construction.	3-2
3-04. Related Projects.	3-2
3-05. Dam Safety History Issues.	3-2
3-06. Modifications to Regulations.	3-2
3-07. Principal Regulation Problems.	3-3
4 - WATERSHED CHARACTERISTICS	4-1
4-01. General Characteristics.	4-1
a. ACT Basin.	4-1
b. Coosa Basin.	4-1
c. Coosa Basin above H. Neely Henry.	4-1
4-02. Topography.	4-1
4-03. Geology and Soils.	4-2
4-04. Sediment.	4-2
4-05. Climate.	4-3
a. Temperature.	4-3
b. Precipitation.	4-5
4-06. Storms and Floods.	4-6
4-07. Runoff Characteristics.	4-6
4-08. Water Quality.	4-7
a. DO.	4-7
b. Nutrients.	4-7
c. pH.	4-9
4-09. Channel and Floodway Characteristics.	4-9
4-10. Upstream Structures.	4-9
4-11. Downstream Structures.	4-9
5 - DATA COLLECTION AND COMMUNICATION NETWORKS	5-1
5-01. Hydrometeorological Stations.	5-1
a. Facilities.	5-1
b. Reporting.	5-4
c. Maintenance.	5-4
5-02. Water Quality Stations.	5-5
5-03. Sediment Stations.	5-5

5-04. Recording Hydrologic Data.	5-5
5-05. Communications Network.	5-5
a. Regulating Office with Project Office.	5-5
b. Between Project Office and Others.	5-5
5-06. Project Reporting Instructions.	5-6
5-07. Warnings.	5-6
5-08. Role of Regulating Office.	5-6
6 - HYDROLOGIC FORECASTS	6-1
6-01. General.	6-1
a. Role of the Corps.	6-1
b. Role of Alabama Power Company.	6-1
c. Role of Other Agencies.	6-1
6-02. Flood Condition Forecasts.	6-2
a. Requirements.	6-2
b. Methods.	6-2
7 - WATER CONTROL PLAN	7-1
7-01. General Objectives.	7-1
7-02. Constraints.	7-1
7-03. Overall Plan for Water Control.	7-1
a. General Regulation.	7-1
b. Basin above H. Neely Henry Project.	7-1
c. H. Neely Henry Project.	7-1
d. Correlation with Other Projects.	7-1
e. Minimum Flow Agreement.	7-2
7-04. Standing Instructions to Project Operator.	7-4
a. Power operations.	7-4
b. Spillway Gate Operating Schedule.	7-4
7-05. Flood Risk Management.	7-4
a. Lake Evacuation Procedures.	7-5
7-06. Recreation.	7-5
7-07. Water Quality.	7-6
7-08. Hydroelectric Power.	7-6
7-09. Navigation.	7-7
7-10. Drought Contingency Plan.	7-12
7-11. Flood Emergency Action Plan.	7-13
7-12. Rate of Release Change.	7-13

8 - EFFECT OF WATER CONTROL PLAN	8-1
8-01. General.	8-1
8-02. Flood Risk Management.	8-1
8-03. Recreation.	8-2
8-04. Water Quality.	8-2
8-05. Fish and Wildlife.	8-2
8-06. Hydroelectric Power.	8-3
8-07. Navigation.	8-3
8-08. Drought Contingency Plans.	8-3
8-09. Flood Emergency Action Plans.	8-4
9 - WATER CONTROL MANAGEMENT	9-1
9-01. Responsibilities and Organization.	9-1
a. APC.	9-1
b. USACE.	9-1
c. Other Federal Agencies.	9-1
d. State and County Agencies	9-2
e. Stakeholders.	9-2
9-02. Interagency Coordination.	9-2
a. Local Press and Corps Bulletins.	9-2
b. NWS.	9-2
c. USGS.	9-2
d. USFWS.	9-2
9-03. Interagency Agreements.	9-3
9-04. Commissions, River Authorities, Compacts, and Committees.	9-3
9-05. Non-Federal Hydropower.	9-3
9-06. Reports.	9-3
9-07. Framework for Water Management Changes.	9-3

TABLE OF CONTENTS (Cont'd)**LIST OF TABLES**

Table No.	Table	Page No.
Table 4-1	River Mile and Drainage Area for Selected Sites in Coosa River Basin above Childersburg, Alabama	4-2
Table 4-2	Monthly Temperatures for Various Locations in Middle ACT Basin	4-4
Table 4-3	Extreme Temperatures within the ACT Basin	4-4
Table 4-4	Normal Rainfall (inches) Based on 30-Year Period – 1991–2020	4-5
Table 4-5	Extreme Rainfall Events (inches), Period of Record	4-6
Table 4-6	Point Sources Discharging Directly into H. Neely Henry Lake	4-8
Table 4-7	Federal and APC Projects on the ACT	4-9
Table 5-1	Rainfall Reporting Network for the Coosa Basin above H. Neely Henry Dam	5-2
Table 5-2	River Stage Reporting Network for H. Neely Henry Dam	5-3
Table 6-1	SERFC Forecast Locations for the Alabama River Basin	6-3
Table 7-1	Drainage Areas of the Coosa River above Childersburg, Alabama	7-3
Table 7-2	Monthly Navigation Flow Target in cfs	7-9
Table 7-3	Basin inflow above APC Projects required to meet a 9.0-Foot Navigation Channel	7-9
Table 7-4	Basin inflow above APC Projects required to meet a 7.5-Foot Navigation Channel	7-10
Table 7-5	ACT Basin Drought Intensity Levels	7-12
Table 7-6	ACT Drought Management Plan	7-14

LIST OF FIGURES

Figure No.	Figure	Page No.
Figure 2-1	H. Neely Henry Dam	2-1
Figure 2-2	H. Neely Henry Project Under Construction Circa 1965	2-2
Figure 4-1	Topographic Regions in Alabama	4-3
Figure 5-1	Typical Encoder with Wheel Tape for Measuring the River Stage or Lake Elevation in the Stilling Well	5-1
Figure 5-2	Typical Field Installation of a Precipitation Gage	5-1
Figure 5-3	Typical Configuration of the GOES System	5-4
Figure 7-1	Flow-Depth Pattern (Navigation Template) Using 2004–2010 Survey Data	7-8
Figure 7-2	Flow Requirements from Rainfall (or Natural Sources) and Reservoir Storage to Achieve the JBT Goal for Navigation Flows for a 9-foot Channel	7-10
Figure 7-3	Flow Requirements from Rainfall (or Natural Sources) and Reservoir Storage to Achieve the JBT Goal for Navigation Flows for a 7.5-foot Channel	7-11

TABLE OF CONTENTS (Cont'd)

LIST OF EXHIBITS

Exhibit No.	Exhibit	Page No.
A	Supplementary Pertinent Data	E-A-1
B	Unit Conversions	E-B-1
C	Memorandum of Understanding between the Corps of Engineers and Alabama Power Company	E-C-1
D	Public Law 436, 83rd Congress, 2nd Session	E-D-1
E	Extracts from Project License	E-E-1
F	Alabama-Coosa-Tallapoosa (ACT) River Basin Drought Contingency Plan	E-F-1
G	Emergency Contact List	E-G-1

TABLE OF CONTENTS (Cont'd)**LIST OF PLATES**

Plate No.	Title
2-1	Location Map
2-2	River Basin Map
2-3	Plan
2-4	Sections
2-5	Free Overflow Spillway Rating Curves
2-6	Partial Opening Gated Spillway Discharge Rating
2-7	Tailwater Rating Curves
2-8	Area-Capacity Curves
2-9	Real Estate Acquisition Limits
2-10	Real Estate Acquisition Limits
2-11	APC Easement Acquisition Limits
2-12	Recreational Facilities
2-13	Performance Curves for Unit 1
2-14	Performance Curves for Unit 2
2-15	Performance Curves for Unit 3
4-1	Temperature and Precipitation Gages
4-2	Discharge Hydrographs at USGS Gage 02400500 at Gadsden, AL and at H. Neely Henry Dam
4-3	Inflow-Outflow-Pool Hydrograph
4-4	Inflow-Outflow-Pool Hydrograph
4-5	Inflow-Outflow-Pool Hydrograph
4-6	Inflow-Outflow-Pool Hydrograph
4-7	Inflow-Outflow-Pool Hydrograph
4-8	Inflow-Outflow-Pool Hydrograph
4-9	Inflow-Outflow-Pool Hydrograph
4-10	Inflow-Outflow-Pool Hydrograph
4-11	Inflow-Outflow-Pool Hydrograph
4-12	Inflow-Outflow-Pool Hydrograph
4-13	Inflow-Outflow-Pool Hydrograph
4-14	Rating Curve For Coosa River at Gadsden, AL
4-15	Rating Curve For Coosa River at Rome, GA

4-16	Rating Curve at Etowah River at Allatoona Dam above Cartersville
4-17	Rating Curve at Etowah River at GA 1 Loop near Rome, GA
4-18	Rating Curve at Etowah River at Kingston
4-19	Rating Curve for Oostanaula River at Resaca
4-20	Relation of Stage at Oostanaula River at 5 th Ave to Flow at Confluence of Etowah and Oostanaula
4-21	Pool Elevation-Inflow-Outflow Hydrographs of Probable Maximum Flood for Flood of 1986
5-1	Precipitation and River Gages
7-1	Guide Curve
7-2	Pre-Flood Evacuation Schedule
8-1	Discharge Percent Chance Exceedance Curve
8-2	Observed Versus Modeled Routing, Flood of March/April 1977
8-3	Observed Versus Modeled Routing, Flood of April 1979
8-4	Observed Versus Modeled Routing, Flood of February 1990
8-5	Observed Versus Modeled Routing, Flood of October 1995
8-6	Inflow-Outflow-Pool Hydrographs Spillway Design Flood
8-7	Pool-Tailwater Frequency Curves

PERTINENT DATA

(see Exhibit A, page E-A-1 for Supplementary Pertinent Data)

GENERAL

Other names of project	Lock 3 Dam
Dam site location	
River	Coosa
Miles above mouth of Coosa River	146.8
Miles above mouth of Mobile River	506.2

RESERVOIR

Top of power pool (May through Oct) – feet (ft) NGVD29	508
Top of power pool (Dec through Mar) – feet NGVD29	507
Storage volume – acre feet	120,853
Power storage, elevation 505-508 – acre feet	30,383
Inactive storage, below elevation 480 – acre feet	1,547
Full power pool (May through Oct), elevation (elev) 508 – acres	11,235
Full power pool (Dec through Mar), elev 507 – acres	10,478
Shoreline (elev 508) – miles	339

STREAMFLOW (at damsite)

Average discharge for Period of Record (1967 – 2009) – cubic feet per second (cfs)	9,979
Maximum daily discharge (Nov. 2004) - cfs	89,129
Minimum daily discharge - cfs	0
Probable Maximum Flood peak discharge - cfs	317,100

TAILWATER

Maximum spillway design flood - feet NGVD29	518.8
Full gate turbine discharge (Logan Martin elev. 460)	
1 Unit Operating (10,200 cfs) – feet NGVD29	464.2
2 units operating (20,000 cfs) – feet NGVD29	468.0
3 units operating (29,700 cfs) – feet NGVD29	471.3

DAM

Total length including dikes - feet	4,908
Total length of non-overflow section – feet	253
Maximum height from roadway to foundation – feet	100
Elevation, top of dam - feet NGVD29	539
Elevation, top of parapet - feet NGVD29	541

SPILLWAY

Type	concrete-gravity
Net length – feet	240
Elevation of crest - feet NGVD29	480
Type of gates	Tainter
Number of gates (29'x 40')	6
Elevation of top of gates in closed position - feet NGVD29	509
Maximum discharge capacity (pool elev. 532.5) – cfs	317,100

POWER PLANT

Three units each consisting of a 27,000 kVA generator driven by a fixed blade vertical turbine rated 33,500 hp at design head of 35 feet

OPERATING DATA

Gross static head at full power pool (elev. 508 feet NGVD29) – feet	43.0
Minimum head (full-gate discharge – 26,700 cfs) – feet	36.7.0

Intentionally left blank.

1 - INTRODUCTION

1-01. Authorization. Public Law 436-83 provides for the private development of the Coosa River, Alabama and Georgia, and directs the Secretary of the Army to prescribe rules and regulations for project operation in the interest of flood risk management and navigation. Therefore, this water control manual has been prepared as directed and in accordance with U.S. Army Corps of Engineers (herein referred to as USACE or Corps) Water Management Regulations, specifically Engineering Regulation (ER) 1110-2-241, *Use of Storage Allocated for Flood Control and Navigation at Non-Corps Projects*. Also, ER 1110-2-240, *Water Control Management* prescribes the policies and procedures to be followed in carrying out water management activities, including establishment and updating of water control plans for non-Corps projects, as required by federal laws and directives. This manual is also prepared in accordance with pertinent sections of the Corps' Engineering Manual (EM) 1110-2-3600, *Management of Water Control Systems*; under the format and recommendations described in ER 1110-2-8156, *Preparation of Water Control Manuals*; and ER 1110-2-1941, *Drought Contingency Plans*. This manual is subject to review and revision at any time upon request of Alabama Power Company (APC) or the District Commander. Revisions to this manual are processed in accordance with ER 1110-2-240.

Below is a complete list of pertinent regulations and guidance and the date enacted:

ER 1110-2-240	Water Control Management	30 May 2016
ER 1110-2-241	Use of Storage Allocated for Flood Control and Navigation at Non-Corps Projects	24 May 1990
ER 1110-2-8156	Preparation of Water Control Manuals	30 September 2018
ER 1110-2-1941	Drought Contingency Plans	02 February 2018
EM-1110-2-3600	Management of Water Control Systems	10 October 2017

1-02. Purpose and Scope. This individual project manual primarily describes the flood risk management water control plan for the APC H. Neely Henry Dam and Lake Project. In addition, the manual includes descriptions of the plans for navigation support and drought contingency operations. The description of the project's physical components, history of development, normal water control activities, and coordination with others are provided as supplemental information to enhance the knowledge and understanding of the water control plan. H. Neely Henry Dam water control regulations must be coordinated with the multiple APC Coosa River projects in the Alabama-Coosa-Tallapoosa (ACT) Basin to ensure consistency with the purposes for which the system was authorized. In conjunction with the ACT Basin Master Water Control Manual, this manual provides a general reference source for H. Neely Henry water control regulation and is intended for use in day-to-day, real-time water management decision making and for training new personnel.

1-03. Related Manuals and Reports. Other manuals related to the H. Neely Henry Project water control regulation activities include the ACT Master Water Control Manual for the entire basin and nine appendices that compose the complete set of water control manuals for the ACT Basin.

Alabama-Coosa-Tallapoosa River Basin Master Water Control Manual

Appendix A Allatoona Dam and Lake

Appendix B	Weiss Dam and Lake (Alabama Power Company)
Appendix C	Logan Martin Dam and Lake (Alabama Power Company)
Appendix D	H. Neely Henry Dam and Lake (Alabama Power Company)
Appendix E	Millers Ferry Lock and Dam and William “Bill” Dannelly Lake
Appendix F	Claiborne Lock and Dam and Lake
Appendix G	Robert F. Henry Lock and Dam and R. E. “Bob” Woodruff Lake
Appendix H	Carters Dam and Lake and Carters Reregulation Dam
Appendix I	Harris Dam and Lake (Alabama Power Company)

Other pertinent information regarding the H. Neely Henry Project and other APC Coosa River projects are contained within the Federal Energy Regulatory Commission (FERC) license for the Coosa projects. Historical river system development reports, definite project reports and design memoranda also have useful information.

1-04. Project Owner. The H. Neely Henry Dam and Lake Project is owned and operated by APC under provisions of the license issued by FERC for Project Number 2146.

1-05. Operating Agency. The H. Neely Henry Project is operated for flood risk management and navigation support in accordance with regulations prescribed by the Secretary of the Army, which are published in the Code of Federal Regulations, Title 33, Chapter II, Part 208, Section 208.65. Day-to-day operation of the facility is assigned to the APC’s Alabama Control Center Hydro Desk in Birmingham, Alabama, which is part of the Transmission Department under the direction of the Reservoir Operations Coordinator. Long-range water planning and flood risk management operation is assigned to the APC Reservoir Management in Birmingham, Alabama, which is part of Southern Company Hydro Services, under the direction of the Reservoir Management Supervisor. Operation of the project is in accordance with the FERC license and this water control manual.

1-06. Regulating Agencies. Regulating authority is shared between the Corps, FERC, and APC. A Memorandum of Understanding (MOU) has been adopted by the APC and the Corps concerning the operation of the project. The purpose of the MOU was to clarify the responsibilities of the Corps and the APC with regard to the operation of the project for flood risk management and other purposes and to provide direction for the orderly exchange of hydrologic data. Those modifications agreed upon by both parties are contained in the regulation plan as presented in this manual. The MOU and this manual will be used to provide direction to implement the prescribed flood risk management operations at the project. A copy of the MOU is included in this manual as Exhibit C.

1-07. Vertical Datum. All vertical data presented in this manual are referenced to the project’s historical vertical datum, National Geodetic Vertical Datum of 1929 (NGVD29). The National Geodetic Survey (NGS) Coordinate Conversion and Transformation Tool (NCAT) program shows that +0.18 can be used to convert NGVD29 to NAV88 at H. Neely Henry Dam.

2 - DESCRIPTION OF PROJECT

2-01. Location. The H. Neely Henry Dam is located on the Coosa River at river mile 146.82, approximately 26 miles downstream from the City of Gadsden, Alabama. H. Neely Henry Lake extends upstream 78 miles to the Weiss Dam, and is located in Etowah, Cherokee, St. Clair, and Calhoun Counties. The powerhouse is located on the east side, or left bank, of the Coosa River. The area of the watershed above the project is approximately 6,596 square miles. The location of the dam is shown on Plates 2-1 and 2-2. The dam is also shown in Figure 2-1.



Figure 2-1 H. Neely Henry Dam

2-02. Purpose. H. Neely Henry Dam is a multiple-purpose project, which constitutes one unit in the proposed total development of the power potential and other water resources of the Coosa River below Rome, Georgia. The dam was built by APC principally for the production of hydroelectric power but was designed and constructed with a provision for the future installation of locks and appurtenances to facilitate development of the Coosa River for navigation when such development becomes economically feasible. The dam also provides flood risk

management benefits. Although not affected by Corps water supply regulations, the H. Neely Henry Lake is a source of water supply for domestic, agricultural, and municipal and industrial (M&I) users. The lake also creates a large recreational area providing opportunities for fishing, boating, and other water-based recreational activities.

2-03. Physical Components. The H. Neely Henry development consists of a dam having a concrete gated spillway section with compacted earth abutment dikes; a reservoir having a surface area of 11,235 acres and extending 78 miles upstream to Weiss Dam at full summer pool of 508 feet NGVD29; a 72,900 kilowatt (kW) power plant, which is part of the main dam, located on the east side of the river between the spillway and the left bank earth abutment; a substation; and appurtenant electrical and mechanical facilities. The project is shown under construction in Figure 2-2. The principal features of the project are described in detail in subsequent paragraphs. Sections and plan of the dam, powerhouse, and appurtenant works are shown on Plates 2-3 and 2-4.

a. Dam. The dam is a concrete gravity-type structure having a top elevation of 539 feet NGVD29 and a length of 858 feet. The maximum height above the existing riverbed is 100 feet. Sections and plan of the dam and appurtenant works are shown on Plate 2-4. The dam is located at river mile 146.82 on the Coosa River approximately 26 miles downstream from the City of Gadsden, Alabama.

b. Earth Dikes. Earth-filled, non-overflow dikes extend from the powerhouse and spillway to high ground on both sides of the concrete dam. These dikes have a top elevation of 539 feet NGVD29. The left, or east bank section is about 850 feet long by 60 feet high and ties into the powerhouse section. The right or west bank section is about 3,200 feet long by 60 feet high and ties into the spillway section. Both sections are 36 feet wide at the top and are traversed by a paved roadway which continues across the powerhouse and spillway sections serving as an access road to the powerhouse.

c. Spillway. The spillway section of the dam with a total length of 305 feet has a net length of 240 feet. The spillway has six radial gates, 29 feet high by 40 feet wide, with an overflow crest of elevation 480 feet NGVD29. The piers between the spillway gates support a roadway bridge across the top of the dam at elevation 539 feet NGVD29. The top of the six radial gates in closed position is elevation 509 feet NGVD29. The radial gates are operated by individual hoists. Free overflow spillway discharge under various operating conditions is shown on Plate 2-5 by a series of curves. The high tailwater, which causes a submergence effect, occurs when the powerhouse is operating in conjunction with a full spillway discharge and/or the Logan Martin Reservoir is at full summer-level pool (elevation 465 feet NGVD29).

A partial-opening gate rating table for six-gate discharge in 0.5-foot increments is shown on Plate 2-6. This table gives discharge with no submergence effect. To indicate when submergence will affect the discharge, lines were put on the table to denote that the discharge

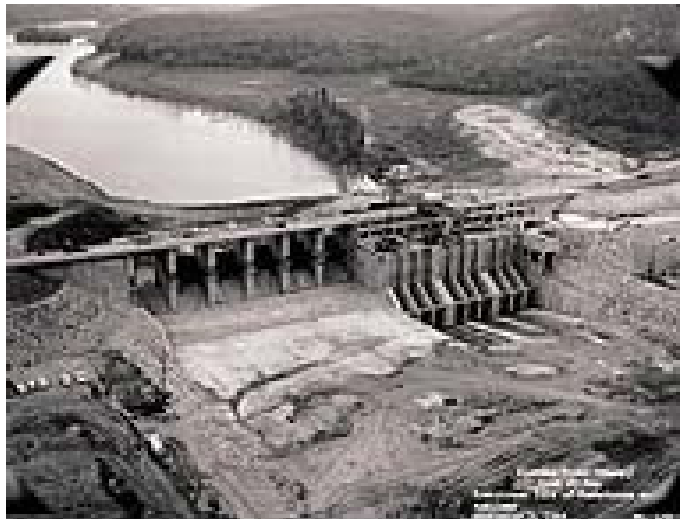


Figure 2-2 H. Neely Henry Project Under Construction Circa 1965

lying above the line will be affected by submergence if the tailwater rises above the elevation shown in parenthesis at each end and just above each line. The spillway has a discharge capacity of 317,100 cubic feet per second (cfs) at elevation 532.5 feet NGVD29, the peak pool elevation of the probable maximum flood.

Discharges from the powerhouse are the upper reaches of APC's Logan Martin Lake, which has a normal full pool elevation of 465 feet NGVD29. The normal static tailwater elevation varies from 465 to 460 feet NGVD29, providing a fluctuating gross head of 40 to 48 feet. Tailwater rating curves at H. Neely Henry Dam for both summer and winter top-of-power-pool levels in Logan Martin Lake are shown on Plate 2-7.

d. Reservoir. From the Weiss Dam to the H. Neely Henry Dam, H. Neely Henry Lake has a full pool summer-time level of 508 feet NGVD29 and a full pool winter-time level of 507 feet NGVD29. At elevation 508 feet NGVD29, the lake has a surface area of 11,235 acres and a total storage capacity of 120,853 acre-feet. At elevation 507 feet NGVD29, the lake has a surface area of 10,478 acres and a storage volume of 109,999 acre-feet. Usable storage of 10,860 acre-feet is available between elevations 508 and 507 feet NGVD29. The lake has 339 miles of shoreline and a maximum depth of 53 feet. The lake is relatively shallow with an average depth of 10.8 feet. The lake drainage area is 6,596 square miles, of which 1,326 square miles comprises the local lakeshed. The hydraulic retention time is approximately 7.25 days. Area-capacity curves and associated data points are shown on Plate 2-8. Flood rights and easements were acquired between elevations 508 to 527 feet NGVD29 and are shown on Plates 2-9 and 2-11.

e. Powerhouse and Penstocks. The powerhouse is situated on the east, or left bank of the Coosa River and with its intake section forms part of the dam. It is joined on the west side by the spillway section and on the east side by a non-overflow, earth dike section. The powerhouse is 105 feet high, 300 feet long, and 170 feet wide including the service bay. It is equipped with three vertical type generators, each rated at 24.3 megawatts (MW) (27,000 kVA at 0.9 power factor), and each operated by a vertical shaft, propeller type, hydraulic turbine rated at 33,500 horsepower for a net head of 35 feet. The total generating capacity is 72.9 MW. Performance curves for the turbines are shown on Plates 2-13 through 2-15. Immediately upstream from the powerhouse, running from the spillway to the east bank, a sheet piling skimming weir has been constructed with top elevation at 480 feet NGVD29. The purpose of this weir is to ensure that water entering the turbine intakes is drawn from the upper levels of the reservoir where dissolved oxygen concentrations are higher during summer-time periods.

2-04. Related Control Facilities. Operation of the H. Neely Henry powerhouse and spillway gates can be operated either locally or remotely controlled from the Alabama Control Center Hydro Desk in Birmingham, Alabama. Operation is closely coordinated with the operation of the other developments in the Coosa Basin, including the Allatoona, Carters, and Weiss Projects upstream and Logan Martin, Lay, Mitchell, Jordan, and Bouldin Projects downstream.

2-05. Public Facilities. Many recreational advantages are inherent in an impoundment of this nature, and special attention has been given to the encouragement of recreational aspects where they do not conflict with major purposes. The FERC project license issued in 2013 included provisions for free access in Article 18 of Form L-5. It is an APC policy to allow the public free access, to a reasonable extent, to project lands and waters for navigation and recreational purposes, including fishing and hunting. Provision for free access is also included in the project license in Article 413. A map which denotes recreational facilities in operation at various points around the H. Neely Henry Lake is included as Plate 2-12.

Intentionally left blank.

3 - HISTORY OF PROJECT

3-01. Authorization. Because of abundant streamflow and numerous excellent power sites, the Alabama-Coosa River System has long been recognized as having vast hydroelectric power potential. The system has been studied for the development of hydropower by both private interests and the Federal Government. During 1925, the APC conducted a study of the storage possibilities of the Coosa River above their existing Lay Dam with a view of developing five additional hydropower dams. In 1928, the APC prepared a report on complete canalization of the Coosa River. That report included the study of a hydropower and navigation dam at the site of the existing Federal Lock No. 2. The report identified this as the Patlay Site.

In 1934, the Corps, under the provisions of House Document No. 308, 69th Congress, First Session, developed a general plan for the overall development of the Alabama-Coosa River System. That plan, submitted to Congress and published as House Document No. 66, 74th Congress, First Session, included a hydropower and navigation dam on the Coosa River at the Patlay site, the same site previously studied by the APC. The Patlay Site (Federal Lock No. 2) is about 1.5 miles upstream from the site of H. Neely Henry Dam.

Additional studies were directed by Congress in resolutions adopted by the Committee on Rivers and Harbors, House of Representatives, on 1 April 1936 and 28 April 1936, and by the Committee on Commerce, United States Senate, on 18 January 1939. In response to those resolutions, an interim report was submitted to Congress in October 1941. That report, published as House Document No. 414, 77th Congress, First Session, recommended development of the Alabama-Coosa River and tributaries for navigation, flood control, power generation and other purposes in accordance with plans being proposed by the Chief of Engineers. The improvement outlined in House Document No. 414 included a dam with a powerhouse at the Patlay Site. Development of the Alabama-Coosa River System as recommended in House Document No. 414 was authorized by Congress in Section 2 of the River and Harbor Act of March 1945, Public Law 14, 79th Congress, First Session.

On 28 June 1954, the 83rd Congress, Second Session, enacted Public Law 436 which suspended the authorization under the River and Harbor Act of 2 March 1945, insofar as it concerned federal development of the Coosa River for the generation of electric power, in order to permit development by private interests under a license to be issued by the Federal Power Commission (FPC). The law stipulates that the license shall require provisions for flood control storage and for future navigation. It further states that the projects shall be operated for flood control and navigation in accordance with reasonable rules and regulations of the Secretary of the Army. The complete text of Public Law 436 is contained in Exhibit D.

On 2 December 1955, the APC submitted an application to the FPC for a license for development of the Coosa River in accordance with the provisions of Public Law 436. The development proposed by the APC, designated in the application as FPC Project No. 2146, included plans for a dam at the site of old Lock 3 about 2.0 miles downstream from the Patlay Site. Later the site was shifted about 0.5 miles upstream to its present location, 48.5 miles above Logan Martin Dam. During construction the name of the project was changed from Lock 3 Dam to H. Neely Henry Dam. Logan Martin and H. Neely Henry Dams form reservoirs, which extend up to Weiss Dam so that the series of three dams is essentially the same as the Corps earlier plans for dams at Howell Mill Shoals, Patlay and Leesburg Sites.

3-02. Planning and Design. The FPC issued a license to the APC on 4 September 1957 for the construction, operation, and maintenance of Project 2146. The license directed that construction of the H. Neely Henry (Lock 3) development commence within five years from 4 September 1957 and be completed within eight years from the date of commencement of construction of Weiss Dam. The license called for the normal pool at H. Neely Henry Dam to be at elevation 505 feet NGVD29 with controlled surcharge storage of 83,000 acre feet above that level. An amendment to the license dated 22 July 1964 established a seasonally varying maximum normal pool at elevation 505 feet NGVD29 from 5 November to 15 April and at elevation 508 feet NGVD29 from 1 May to 31 October each year. The amendment also eliminated the surcharge storage and provided for temporary lowering of the reservoir below maximum normal levels in the interest of flood risk management and navigation, in accordance with rules and regulations to be prescribed by the Secretary of the Army. Portions of the license pertinent to flood risk management, navigation, water use and reservoir regulation are contained in Exhibit E.

The rules and regulations to be prescribed by the Secretary of the Army were documented in Reservoir Regulation Manuals (RRM). The Corps approved the RRM for the Weiss, Neely Henry, and Logan Martin APC projects in October 1965, January 1979, and January 1968, respectively. The purpose of the RRM was to define a plan of operation during the occurrence or threatened occurrence of damaging flood conditions at downstream locations. Along with their RRM, the Corps and APC developed a MOU to clarify the responsibilities of the two entities with regard to operation of the developments for flood risk management and other purposes and to provide for the orderly exchange of hydrologic data.

The Neely Henry project is primarily operated in a peaking mode, with seasonal variation in storage and generation. Operation is closely coordinated with Weiss Dam upstream and downstream APC reservoirs.

3-03. Construction. Construction started 1 August 1962, and the dam was completed in June 1966. Filling of the reservoir to operating level commenced 23 February 1966. The pool reached elevation 500.6 feet NGVD29 on 30 March 1966, the date initial testing of the turbines began. Two generating units were placed in commercial operation on 2 June 1966, and the third unit on 29 June 1966.

3-04. Related Projects. The Weiss Project is one of six other projects on the Coosa River located above Neely Henry. The Logan Martin Project is downstream of Neely Henry on the Coosa River 98.5 miles above the mouth at the Alabama River. Downstream of Logan Martin Dam is the Lay Dam and Powerhouse at mile 51.0, 47.5 miles downstream, followed by the Mitchell Dam and Powerhouse at mile 36.8, and the Jordan Dam at mile 18.9. The sites are shown on Plate 2-1 and associated drainage areas shown on Table 4-7.

3-05. Dam Safety History Issues. Dam safety oversight of the APC projects is covered under the FERC license.

3-06. Modifications to Regulations. On 26 February 2001, FERC approved a plan that allowed APC to evaluate an alternative operating rule curve that would better accommodate recreational access. This “evaluation” period began in 2001 and continued to the end of the existing license term (i.e., 2007) for the H. Neely Henry development. The “evaluation” period was extended along with the FERC license during the license renewal process. The FERC license was renewed for 30 years on 20 June 2013 and made permanent the alternative operating rule curve. The lake is operated from the full pool elevation of 508 feet NGVD29 from 1 May through 30 September during normal inflows to meet APC system power demand. A

drawdown of the lake begins 1 October and ends 30 November when the level is lowered to 507 feet NGVD29. This elevation is maintained until April when lake refilling begins and continues through 30 April when full pool is reached. Previously, the wintertime drawdown level was 505 feet NGVD29 from 5 November to 15 April.

3-07. Principal Regulation Problems. There have been no significant regulation problems, such as erosion, boils, severe leakage, etc., at the H. Neely Henry Project.

Intentionally left blank.

4 - WATERSHED CHARACTERISTICS

4-01. General Characteristics.

a. ACT Basin. The head of the Coosa River is at Rome, Georgia at the confluence of the Etowah and Oostanaula Rivers. It flows west to the Alabama state line, then in a southwesterly then southerly direction for about 286 miles to join the Tallapoosa River near Wetumpka, Alabama to form the Alabama River. The Alabama River flows in a southwesterly direction about 310 miles where it joins the Tombigbee River to form the Mobile River. The Mobile River flows southerly about 45 miles where it empties into Mobile Bay at Mobile, Alabama, an estuary of the Gulf of Mexico. The entire ACT Basin is shown on Plate 2-2.

b. Coosa Basin. The Coosa Basin drains a total of 10,156 square miles, of which 2,986 square miles are in Georgia and 7,170 square miles are in Alabama. The main river width varies from about 250 to over 1,000 feet with banks generally about 20 feet above the riverbed. The total fall of the river is 450 feet in 286 miles, giving an average fall of about 1.6 feet per mile.

c. Coosa Basin above H. Neely Henry. The basin above H. Neely Henry drains approximately 6,596 square miles and has a fall of approximately 0.8 feet per mile. The area is divided into three principal sub-areas. One is the Coosa River area, which extends 138 miles upstream to Rome, Georgia, and contains 2,590 square miles. This sub-area is itself divided into two parts: the upper portion consists of 1,260 square miles and lies above the APC's Weiss Dam, and the lower portion consists of 1,330 square miles and lies between Weiss Dam and H. Neely Henry Dam. The other two principal sub-areas are the basins of the Etowah and Oostanaula Rivers. These two rivers converge at Rome, Georgia to form the Coosa River. The Etowah River has a drainage area of 1,861 square miles of which 1,122 square miles is above the Allatoona Dam and Lake Allatoona Project, located 48 miles upstream from Rome, Georgia. The Oostanaula River total drainage area is 2,150 square miles. The Carters Dam and Lake Project on the Coosawattee River, a main tributary of the Oostanaula River, has a drainage area of 374 square miles. The drainage area and river miles for important locations of interest within the basin are shown in Table 4-1.

4-02. Topography. The H. Neely Henry Project is located in the Valley and Ridge physiographic province of the southern Appalachian Mountains (see Figure 4-1). The Valley and Ridge ecoregion has a high relief, with altitudes ranging from 400 feet in valleys to 1,600 feet at ridge tops. The bedrock geology of this area is comprised dominantly of Paleozoic era sedimentary formations (primarily shales, with some other sedimentary rock such as sandstones) that have been extensively folded, faulted and thrust. The geology results in ridges that are typically northeast-southwest oriented, and the stream patterns that are typically trellis-like or rectangular and their movement is controlled by the ridge features and weathering of the rocks. The Coosa River occupies a broad, flat, shale valley above the H. Neely Henry Dam. The bedrock consists dominantly of shale inter-bedded with localized layers of limestone and dolomite. The shale, which is of Mississippian age, is soft and tends to weather relatively rapidly where exposed. Portions of the region, particularly in the lowlands adjacent to the Coosa River, have floodplain alluvium and residuum (unconsolidated weathered material that accumulates over disintegrating rock) over the bedrock. Limestone deposits are mined in the region.

Table 4-1 River Mile and Drainage Area for Selected Sites in Coosa River Basin above Childersburg, Alabama

River Mile Above Mouth of ACT System	River	Location	Drainage Area (sq mi)	Owner
693	Etowah	Allatoona Dam	1,122	Corps
645.2	Etowah	Mouth	1,861	
672	Coosawattee	Carters Dam	374	Corps
645.2	Oostanaula	Mouth	2,150	
638.1	Coosa	Mayo's Bar	4,040	
585.1	Coosa	Weiss Dam	5,270	APC
506.2	Coosa	H Neely Henry Dam	6,596	APC
457.4	Coosa	Logan Martin Dam	7,743	APC
410.2	Coosa	Lay Dam	9,053	APC
396.2	Coosa	Mitchell Dam	9,778	APC
378.3	Coosa	Jordan Dam	10,102	APC
305	Coosa	Mouth	10,200	
497.4	Tallapoosa	R. L. Harris Dam	1,454	APC
420	Tallapoosa	Martin Dam	2,984	APC
412.1	Tallapoosa	Yates Dam	3,293	APC
409.1	Tallapoosa	Thurlow Dam	3,308	APC
281.2	Alabama	Robert F Henry Dam*	16,233	Corps
178	Alabama	Millers Ferry Dam*	20,637	Corps
117.5	Alabama	Claiborne Dam*	21,473	Corps

4-03. Geology and Soils. Valley and Ridge soils are typically shallow and well drained, and water moves rapidly toward streams during precipitation events. The H. Neely Henry Project area soils are dominantly Ultisols. This soil order, which covers the majority of the State of Alabama, has developed in forested, humid/high rainfall, subtropical conditions on old landscapes (e.g., not glaciated or recently flooded). These soils are characterized by a surface soil that is often acidic and low in plant nutrients. The surface has a low base status (a measure of fertility) due to high rainfall weathering that has occurred over long time periods and parent materials low in base forming minerals. Although Ultisols are not as fertile as many other soil orders they do support abundant forest growth and respond well to management for agriculture.

4-04. Sediment. Significant sources of sediment within the basin are agricultural land erosion, unpaved roads, and silviculture, and variation in land uses that result in conversion of forests to lawns or pastures. In general, the quantity and size of sediment transported by rivers is influenced by the presence of dams. Impoundments behind dams serve as sediment traps where particles settle in the lake headwaters because of slower flows. Large impoundments typically trap coarser particles plus some of the silt and clay. Often releases from dams scour or erode the streambed downstream. Ultisols dominate the Valley and Ridge ecoregion. They generally lack the original topsoil because of erosion during intensive cotton farming beginning in the 18th century.

Siltation studies by APC have been limited to evaluating the recreational impact of siltation at the mouths of tributaries. Studies indicate that shoaling over the years is reduced because of increased vegetation in the basin. Erosion studies indicate that sheet and rill erosion on cropland in Alabama was approximately 7.2 tons/acre/year in 1982 and approximately 6.0 tons/acre/year in 1997.

There are known cross sections of the reservoir available which can be used to establish ranges for sedimentation and retrogression surveys as the need arises. The cross sections were furnished by the Corps to APC in the 1980s and were eventually incorporated into an unsteady Hydrologic Engineering Center's River Analysis System (HEC-RAS) model by the APC. The location of sections is shown on a number of U.S. Geological Survey (USGS) quad sheets available at the APC.

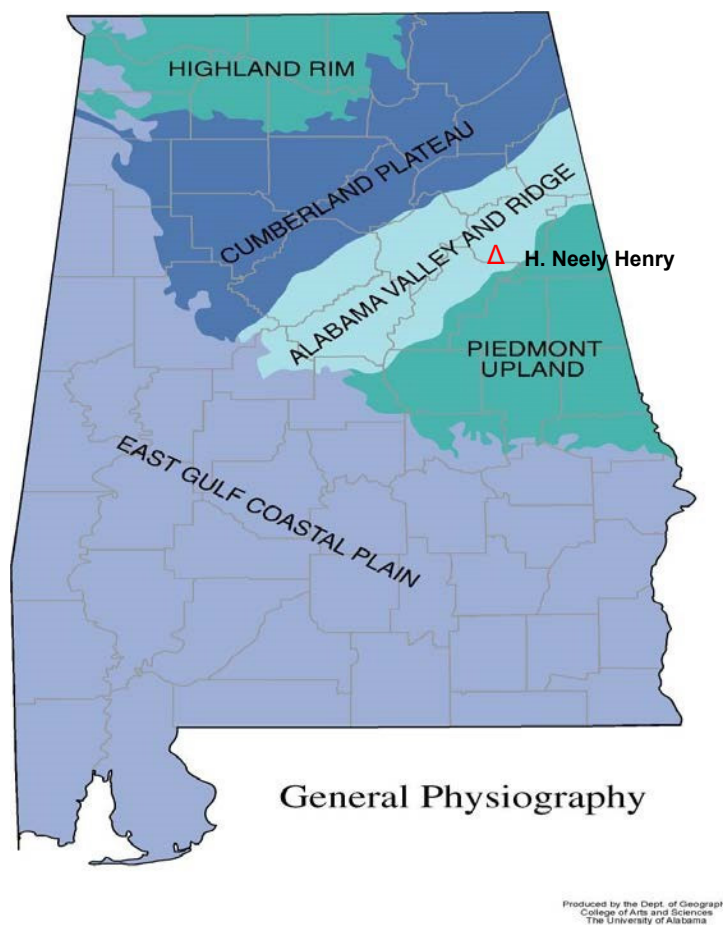


Figure 4-1 Topographic Regions in Alabama

4-05. Climate. Chief factors that control the climate of the ACT Basin are its geographical position in the southern end of the temperate zone and its proximity to the Gulf of Mexico and South Atlantic Ocean. Another factor is the range in altitude from almost sea level at the southern end to higher than 3,000 feet in the Blue Ridge Mountains to the north. Frontal systems influence conditions throughout the year. During the warmer months, thunderstorms are a major producer of rainfall. Tropical disturbances and hurricanes also affect the region.

a. Temperature. The average annual air temperature in the H. Neely Henry watershed for the time period 1991–2020 is 61.7 degrees Fahrenheit (°F). Table 4-2 provides average, maximum, and minimum monthly normal temperature data for six locations in or around the project. Climatologists define a climatic normal as the arithmetic average of a climate element, such as temperature, over a prescribed 30-year time interval. The National Weather Service (NWS) uses a homogenous and complete dataset with no changes to the collection site or missing values to determine the 30-year normal values. When developing this 30-year normal dataset, the NWS has standard methods available to them to adjust the dataset for any inhomogeneities or missing data before computing normal values. Extreme temperatures recorded in the mid-ACT Basin range from 109 °F to -10 °F. A website with temperature and precipitation climate normals for these stations and others is found at: <https://www.weather.gov/wrh?Climate?wfo=bmx>.

Table 4-2 Monthly Temperatures for Various Locations in Middle ACT Basin

NORMAL MONTHLY TEMPERATURE (°F) FOR MIDDLE ACT BASIN (MAX, MIN, & AVG), 1991-2020														
		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
ALEXANDER CITY, AL AL USC00010160	MAX	56.0	60.1	68.1	75.3	82.3	88.2	91.2	90.2	85.7	76.7	66.4	58.4	74.9
	MIN	32.1	35.2	41.5	48.4	57.8	66.1	69.7	68.6	62.7	50.8	40.3	34.9	50.7
	AVG	44.1	47.7	54.8	61.8	70.1	77.1	80.5	79.4	74.2	63.7	53.4	46.6	62.8
GADSDEN, AL USC00013154	MAX	52.8	57.3	66.0	74.9	82.0	87.8	90.9	90.3	85.3	75.4	64.0	55.6	73.5
	MIN	57.3	36.2	43.3	50.4	59.4	67.9	71.2	70.4	64.3	52.5	41.3	35.7	52.1
	AVG	66.0	46.7	54.7	62.7	70.7	77.9	81.0	80.4	74.8	64.0	52.7	45.6	62.8
ROCK MILLS, AL USC00017025	MAX	54.2	60.0	67.6	75.3	82.3	87.4	88.7	88.8	84.6	75.0	64.8	57.1	73.8
	MIN	32.2	35.7	41.8	47.9	56.8	64.8	67.5	67.5	61.1	49.4	39.5	34.6	49.9
	AVG	43.2	47.9	54.7	61.6	69.6	76.1	78.1	78.1	72.9	62.2	52.1	45.8	61.9
LAFAYETTE 2W, AL AL USC00014502	MAX	55.7	60.0	67.6	75.0	81.7	87.0	90.0	88.9	84.2	75.0	65.4	57.5	74.0
	MIN	30.2	33.8	39.4	45.7	55.3	63.5	67.4	66.3	60.5	48.6	37.5	32.8	48.4
	AVG	42.9	46.9	53.5	60.3	68.5	75.3	78.7	77.6	72.4	61.8	51.4	45.2	61.2
HEFLIN, AL USC00013775	MAX	53.3	57.6	65.6	73.4	79.9	85.3	88.5	87.9	83.5	74.5	64.0	55.7	72.4
	MIN	29.7	32.6	38.8	45.9	54.9	63.1	66.9	66.1	59.9	47.9	37.3	32.7	48.0
	AVG	41.5	45.1	52.2	59.6	67.4	74.2	77.7	77.0	71.7	61.2	50.6	44.2	60.2
TALLADEGA, AL USC00018024	MAX	54.2	58.5	66.7	74.8	81.9	87.9	90.8	90.1	85.6	75.7	64.9	56.7	74.0
	MIN	30.6	33.6	39.6	46.3	55.8	64.5	68.2	67.2	60.9	48.6	38.1	33.3	48.9
	AVG	42.4	46.0	53.1	60.5	68.9	76.2	79.5	78.7	73.3	62.1	51.5	45.0	61.4
BASIN AVG	MAX	54.4	58.9	66.9	74.8	81.7	87.3	90.0	89.4	84.8	75.4	64.9	56.8	73.8
	MIN	35.4	34.5	40.7	47.4	56.7	65.0	68.5	67.7	61.6	49.6	39.0	34.0	49.7
	AVG	46.7	46.7	53.8	61.1	69.2	76.1	79.3	78.5	73.2	62.5	52.0	45.4	61.7

Source: National Oceanic and Atmospheric Administration (NOAA), National Weather Service, NOWData – NOAA Online Weather Data

Table 4-3 shows the extreme temperatures for four stations within the middle ACT Basin. The maximum and minimum recorded temperatures for each month are shown. These stations are Gadsden, Childersburg, and Valley Head in Alabama, and Calhoun Experiment Station in Georgia. All the middle Coosa Basin temperature stations are shown on Plate 4-1.

Table 4-3 Extreme Temperatures within the ACT Basin

EXTREME TEMPERATURES (°F) WITHIN MIDDLE ACT BASIN, 1991-2020												
Month	ALEXANDER CITY, AL USC00010160		GADSDEN, AL USC00013154		ROCK MILLS, AL USC00017025		LAFAYETTE 2W, AL USC00014502		HEFLIN, AL USC00013775		TALLADEGA, AL USC00018024	
	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low
Period	1969 To 2021		1953 To 2021		1953 To 2021		1944 To 2021		1956 To 2021		1888 To 2021	
January	80	-6	76	-6	79	0	84	-7	78	-4	82	-5
February	82	5	82	1	83	6	86	3	83	1	84	-10
March	89	12	88	11	88	13	89	8	87	8	90	6
April	92	25	91	22	92	24	93	25	90	22	98	21
May	96	35	99	33	98	31	98	34	98	30	98	32
June	102	42	106	42	105	42	103	42	106	38	109	39

EXTREME TEMPERATURES (°F) WITHIN MIDDLE ACT BASIN, 1991–2020												
Month	ALEXANDER CITY, AL USC00010160		GADSDEN, AL USC00013154		ROCK MILLS, AL USC00017025		LAFAYETTE 2W, AL USC00014502		HEFLIN, AL USC00013775		TALLADEGA, AL USC00018024	
	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low
Period	1969 To 2021		1953 To 2021		1953 To 2021		1944 To 2021		1956 To 2021		1888 To 2021	
July	104	55	105	52	105	51	107	53	107	47	109	48
August	105	53	105	52	103	47	105	50	105	49	107	46
September	101	38	102	33	100	32	100	37	100	29	109	35
October	100	26	99	23	99	21	99	21	96	21	100	23
November	94	14	87	14	86	11	87	6	87	10	89	5
December	81	-1	78	1	80	-1	81	-1	78	-10	80	0

Source: NOAA, National Weather Service, NOWData – NOAA Online Weather Data

b. Precipitation. Due to the topographic lift of the Blue Ridge Mountains, the upland slopes are subject to intense local storms and to general storms of heavy rainfall lasting days. Heavy rains may occur at any time during the year but are most frequent between late fall and mid-spring, when the majority of the large floods in the basin have been recorded. The large flood of March 1990 occurred when a storm front extended from Mobile, Alabama to Montgomery, Alabama to Rome, Georgia, and subtropical moisture was continuously drawn along the line producing an extended period of heavy rain. The normal monthly and annual precipitation in and around the H. Neely Henry watershed is shown on Table 4-4. This is based on the arithmetical mean of the normals at six stations. These stations are the same as the temperature stations and are shown on Plate 4-1. About 40 percent of the normal annual precipitation occurs from January through April, while only about 30 percent occurs during the dry period August through November. The average annual snowfall is three to five inches, usually in January and February, but is of minor importance in producing runoff.

Flood-producing storms can occur over the basin at any time, but they are much more frequent in the winter and early spring. Major storms in the winter are usually of the frontal type. Summer storms consist mainly of convective thundershowers with occasional tropical storms affecting the basin.

Table 4-4 Normal Rainfall (inches) Based on 30-Year Period – 1991–2020

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
ALEXANDER CITY, AL USC00010160	6.22	5.49	5.64	4.64	4.46	4.76	5.21	4.70	3.64	2.86	4.40	5.67	57.69
GADSDEN, AL USC00013154	5.70	5.28	5.40	5.07	4.79	4.56	4.71	4.49	4.50	3.51	4.25	5.58	57.84
ROCK MILLS, AL USC00017025	5.27	5.34	5.23	4.37	4.11	4.85	4.47	4.02	3.39	2.78	4.12	5.08	53.03
LAFAYETTE 2W, AL USC00014502	5.70	5.33	5.70	4.80	4.40	4.48	4.80	4.23	3.53	3.63	4.31	5.61	56.52
HEFLIN, AL USC00013775	5.98	5.59	6.10	4.83	4.67	4.58	5.39	4.36	3.33	3.36	4.51	5.55	58.25
TALLADEGA, AL USC00018024	5.57	6.02	6.39	4.77	4.65	4.67	4.69	3.90	3.49	3.41	4.69	5.20	57.45
BASIN AVE	5.74	5.51	5.74	4.75	4.51	4.65	4.88	4.28	3.65	3.26	4.38	5.45	56.80

Source: NOAA, National Weather Service, NOWData – NOAA Online Weather Data

Extreme rainfall events for three stations within the middle ACT Basin are shown on Table 4-5. Gadsden and Valley Head, Alabama and Rome, Georgia are shown with the monthly maximum and minimum values. Also shown is the one-day maximum rainfall for each location.

Table 4-5 Extreme Rainfall Events (inches), Period of Record

EXTREME RAINFALL EVENTS (INCHES) WITHIN MIDDLE ACT BASIN																		
	ALEXANDER CITY, AL USC00010160			GADSDEN, AL USC00013154			ROCK MILLS, AL USC00017025			LAFAYETTE 2W, AL USC00014502			HEFLIN, AL USC00013775			TALLADEGA, AL USC00018024		
Period of Record	1969 to 2021			1953 to 2021			1938 to 2021			1944 to 2021			1956 to 2021			1888 to 2021		
	Monthly			Monthly			Monthly			Monthly			Monthly			Monthly		
	Max	Min	1-Day Max	Max	Min	1-Day Max	Max	Min	1-Day Max	Max	Min	1-Day Max	Max	Min	1-Day Max	Max	Min	1-Day Max
Jan	12.13	1.01	3.57	10.14	0.80	5.20	12.79	1.80	4.23	11.34	1.16	6.75	12.54	1.61	4.05	15.59	0.60	4.52
Feb	14.20	1.70	3.50	14.24	0.62	4.75	17.64	1.18	7.04	19.09	1.48	5.75	17.53	1.36	5.40	17.15	0.77	4.56
Mar	14.77	1.24	4.16	17.41	1.45	4.98	12.47	1.15	5.32	15.36	1.09	5.70	15.86	1.83	5.75	18.24	0.40	9.15
Apr	11.65	0.37	7.12	12.65	0.57	4.60	12.52	1.34	4.55	16.40	0.66	7.38	16.30	0.74	6.05	18.27	0.61	5.72
May	12.45	0.32	3.36	11.11	0.48	3.50	7.79	0.37	6.30	12.88	0.26	4.02	15.14	0.65	6.43	16.80	0.00	6.67
Jun	14.67	0.49	3.91	10.30	0.13	3.10	11.49	0.48	5.79	14.83	0.77	4.69	10.88	0.13	4.94	11.97	0.32	4.60
Jul	12.05	0.73	5.02	14.73	1.01	3.80	13.99	0.32	4.91	11.68	0.87	4.0	14.21	0.94	4.70	17.82	0.72	4.90
Aug	7.87	1.02	3.40	10.93	0.10	6.21	7.85	0.63	4.16	12.96	0.90	6.38	10.87	0.21	6.50	11.44	0.15	5.30
Sep	9.61	0.52	4.73	10.45	0.02	5.10	12.08	0.20	5.00	11.24	0.12	7.11	11.48	0.10	3.84	10.79	0.00	5.60
Oct	13.72	0.00	3.20	9.00	0.00	4.98	10.44	0.00	4.75	10.62	0.00	6.30	10.10	0.00	5.30	11.01	0.00	5.51
Nov	11.70	0.69	3.02	14.38	0.28	5.60	16.86	0.02	4.69	15.08	0.33	5.0	10.39	1.10	4.88	15.81	0.19	4.35
Dec	12.50	1.04	4.17	13.05	0.43	5.85	15.99	0.89	4.24	20.34	1.43	4.93	12.92	0.91	4.30	15.35	0.98	5.05

Source: NOAA, National Weather Service, NOWData – NOAA Online Weather Data

4-06. Storms and Floods. Flood producing storms may occur over the Coosa Basin at any time but are more frequent during the winter and spring. Major storms in the winter are usually of the frontal type, which persist for several days and cover large areas. Summer storms are usually tropical in origin and are normally short and intense, and usually cover small areas. Records at USGS gage 02400500 at Gadsden, Alabama, 26 miles upstream of the dam, are available from October 1926 to the present. Inflow, outflow, and pool records from January 1967 to December 2020 are shown on Plates 4-2 to 4-13.

The largest storms recorded at Gadsden, Alabama prior to dam construction were the floods of 1886 (115,000 cfs), April 1936 (76,900 cfs), February 1961 (74,100 cfs), and January 1933 (72,500). The largest post-construction discharges recorded at H. Neely Henry, 27 miles downstream of the Gadsden gage, were the floods of November 2004 (89,130 cfs), April 1979 (88,620 cfs), and April 1977 (84,350 cfs).

4-07. Runoff Characteristics. In the ACT Basin, rainfall occurs throughout the year but is less abundant from August through November. Only a portion of rainfall actually runs into local streams to form the major rivers. Factors that determine the percent of rainfall that runs into the streams include the intensity of the rain, antecedent conditions, ground cover, and time of year (plants growing or dormant). Intense storms will have high runoff potential regardless of other conditions while a slow rain can produce little measurable runoff. Rating curves for the Coosa River at Gadsden, Alabama and Rome, Georgia are shown on Plates 4-14 and 4-15. Rating curves for the Etowah River at Allatoona Dam, at GA 1 Loop near Rome, Georgia, and at Kingston, Georgia, are shown on Plates 4-16 through 4-18. A rating curve for the Oostanaula

River at Resaca, Georgia is shown on Plate 4-19. Plate 4-20 shows the relation of stage on the Oostanaula River at the 5th Avenue bridge in Rome, Georgia to the flow at the confluence of the Oostanaula and Etowah Rivers.

4-08. Water Quality. Per the Alabama Department of Environmental Management's (ADEM) 2020 Integrated Water Quality Monitoring and Assessment Report, Water Quality in Alabama 2018–2020 (AL 303[d], 2020), Neely Henry Lake and its tributaries do not support their designated uses of fish and wildlife, public water supply, and swimming. H. Neely Henry is impaired due to nutrients. H. Neely Henry tributaries are impaired due to nutrients and pathogens (*E. coli*). Sources of impairment are identified as agriculture, animal feed operations and pasture grazing, urban runoff, and M&I discharges.

H. Neely Henry Lake is ranked as Category 4A. Category 4A waters are those for which all total maximum daily loads (TMDLs) needed to result in attainment of all applicable water quality standards have been approved or established by U.S. Environmental Protection Agency.

The Final TMDLs for Neely Henry Lake Nutrients, Organic Enrichment (OE)/Dissolved Oxygen (DO) and pH, Logan Martin Lake Nutrients and OE/DO, Lay Lake Nutrients and OE/DO, and Mitchell Lake Nutrients (TMDL 2008), published by ADEM, identified the lake as impaired for OE/DO, nutrients, and pH. The impaired criteria are discussed below.

a. DO. ADEM Administrative Code Rule 335-6-10-.09) DO criteria for waters with designated use classifications of swimming, fish and wildlife and public water supply is:

“...daily dissolved oxygen concentrations shall not be less than 5.0 mg/L at all times; except under extreme conditions due to natural causes, it may range between 5.0 mg/L and 4 mg/L, provided that the water quality is favorable in all other parameters. The normal seasonal and daily fluctuations shall be maintained above these levels. In no event shall the dissolved oxygen level be less than 4 mg/L due to discharges from existing hydroelectric generation impoundments. All new hydroelectric generation impoundments, including addition of new hydroelectric generation units to existing impoundments, shall be designed so that the discharge will contain at least 5.0 mg/L dissolved oxygen where practicable and technologically possible. The Environmental Protection Agency, in cooperation with the State of Alabama and parties responsible for impoundments, shall develop a program to improve the design of existing facilities.

The dissolved oxygen criterion is established at a depth of 5 feet in water 10 feet or greater in depth; for those waters less than 10 feet in depth, the dissolved oxygen criterion is applied at mid-depth. Levels of organic materials may not deplete the daily dissolved oxygen concentration below this level, nor may nutrient loads result in algal growth and decay that violates the dissolved oxygen criterion...”

It is assumed that DO criteria are being met in H. Neely Henry because AL 303(d), 2020 does not identify DO as a source of impairment. Aeration at H. Neely Henry Dam is described in Section 7-07.

In-lake thermal stratification is not a regular occurrence in H. Neely Henry Lake. ADEM indicates DO levels decline only slightly from the top to the bottom of the water column and water temperatures are essentially the same. The run-of-the-river nature of H. Neely Henry Lake and its shallow depths help to minimize stratification.

b. Nutrients. AL 303(d), 2020 identifies H. Neely Henry Lake as eutrophic, having waters rich in mineral and organic nutrients that promote a proliferation of plant life. Decomposition of the plant life can reduce the DO content throughout the lake. ADEM's decision to list H. Neely

Henry Lake as being impaired for nutrients was authorized under ADEM's Water Quality Standards Program, which employs numeric and narrative criteria to ensure adequate protection of designated uses for surface waters of the State.

Numeric criteria typically have quantifiable endpoints for a given parameter such as pH, DO, or a toxic pollutant, whereas narrative criteria are qualitative statements that establish a set of desired conditions for all State waters. These narrative criteria are more commonly referred to as "free from" criteria that enable States a regulatory avenue to address pollutants or problems that may be causing or contributing to a use impairment that otherwise cannot be evaluated against any numeric criteria. Typical pollutants that fall under this category are nutrients and sediment.

H. Neely Henry Lake and Dam is subject to the qualitative criteria described ADEM Administrative Code 335-6-10-.06:

335-6-10-.06 Minimum Conditions Applicable to All State Waters. The following minimum conditions are applicable to all State waters, at all places and at all times, regardless of their uses:

(a) State waters shall be free from substances attributable to sewage, industrial wastes, or other wastes that settle in forming bottom deposits, which are unsightly, putrescent, or interfere directly or indirectly with any classified water use.

(b) State waters shall be free from floating debris, oil, scum, and other floating materials attributable to sewage, industrial wastes, or other wastes in amounts sufficient to be unsightly, or which interfere directly or indirectly with any classified water use.

(c) State waters shall be free from substances attributable to sewage, industrial wastes, or other wastes in concentrations or combinations, which are toxic or harmful to human, animal, or aquatic life to the extent commensurate with the designated usage of such waters.

Point sources discharging directly into H. Neely Henry Lake are presented in Table 4-6. The major point sources have a total phosphorus limit of 1 mg/L applied as a monthly average limit in April through October. The minor point sources have a total phosphorus limit of 8.34 pounds per day (lbs/day), applied as a monthly average in April through October. ADEM may impose a concentration based total phosphorus limit for a particular point source based on site-specific conditions.

Table 4-6 Point Sources Discharging Directly into H. Neely Henry Lake

NPDES PERMIT #	Facility Name	Facility Type	Design Flow (million gallons per day [mgd])
AL0055867	Southside Lagoon	Minor Municipal	0.26
AL0021334	Glencoe Lagoon	Minor Municipal	0.45
AL0077976	Willow Point Marina	Minor Municipal	0.02
AL0022659	Gadsden East WWTP	Major Municipal	6.18
AL0053201	Gadsden West WWTP	Major Municipal	11.32
AL0056839	Rainbow City Lagoon	Major Municipal	3.00
AL0057657	Attalla Lagoon	Major Municipal	4.00
AL0002119	Tyson Foods	Major Municipal	1.60

The State of Alabama has not established a lake nutrient standard for H. Neely Henry Lake. For TMDL development, a standard of 18 micrograms per liter ($\mu\text{g/L}$) of chlorophyll *a* in the upper reservoir and dam forebay was set as the target.

Historically, high nutrient loadings impacting the water quality in H. Neely Henry Lake have been attributed to upstream activities. Therefore, as part of the TMDL process, allocations of nutrients were given to the point sources to achieve the chlorophyll *a* standard set in the TMDL 2008. Pollutant loads from point sources are expected to decrease in the future based on the TMDL reductions.

c. pH. It is assumed that criteria established in the TMDL 2008 are being met in H. Neely Henry because AL 303(d), 2020 does not identify pH as a source of impairment.

4-09. Channel and Floodway Characteristics. There are no major damage centers between H. Neely Henry and Logan Martin Dam downstream. Flood damage reduction operations downstream are described in Paragraph 7-05, Exception 3. Flooding during a potential dam failure is addressed in Chapter IX.

4-10. Upstream Structures. The APC Weiss Dam and Lake Project is located immediately upstream of H. Neely Henry Project on the Coosa River. The Corps' Allatoona Dam and Lake Allatoona Project and the Carters Dam and Lake and Reregulation Dam are located on the Etowah and Coosawattee Rivers, respectively, in Georgia.

4-11. Downstream Structures. The APC projects downstream of the H. Neely Henry Project on the Coosa River include Logan Martin, Lay, Mitchell, Bouldin, and Jordan. Corps projects downstream of the H. Neely Henry Project include Robert F. Henry, Millers Ferry, and Claiborne Locks and Dams. The Alabama River is navigable to Montgomery, Alabama near river mile 342.0. Locations of these projects are shown on Plates 2-1 and 2-2. The existing upstream and downstream federal and APC projects and the drainage areas above them are shown on Table 4-7.

Table 4-7 Federal and APC Projects on the ACT

Agency	Alabama River Projects	Drainage Area (sq mi)
Corps	Claiborne	21,473
Corps	Millers Ferry	20,637
Corps	RF Henry	16,233
Coosa River Projects		
APC	Jordan/Bouldin*	10,102
APC	Mitchell	9,778
APC	Lay	9,053
APC	Logan Martin	7,743
APC	Henry	6,596
APC	Weiss	5,270
Corps	Allatoona	1,122
Corps	Carters	374

Agency	Alabama River Projects	Drainage Area (sq mi)
Tallapoosa Projects		
APC	Thurlow	3,308
APC	Yates	3,293
APC	Martin	2,984
APC	Harris	1,454

* Jordan and Bouldin Dams share the same drainage area and reservoir

5 - DATA COLLECTION AND COMMUNICATION NETWORKS

5-01. Hydrometeorological Stations. Management of water resources requires continuous, real-time knowledge of hydrologic conditions. Both the APC and the Corps collect and maintain records of hydrologic data and other information in connection with the operation of projects in the Coosa River Basin. Since the data collected by the APC are needed by the Corps in carrying out its responsibility of monitoring the flood risk management operations of the H. Neely Henry Project, and the data collected by the Corps supplements that being collected by the APC and is of value to them in planning their project operations, it is important that each agency furnish the other with as much of its hydrologic and operating data as may be needed or found beneficial in its operation. This requires that communications facilities be available between the Mobile District Office and APC Reservoir Management. The USGS and NWS, in cooperation with the APC, the Corps, and other Federal and State agencies, maintain a network of real-time gaging stations throughout the ACT Basin.

a. Facilities. APC's Hydro Data Acquisition System (HDAS) is a combination of over 100 rain, stage, and evaporation gages located in the river basins where APC dams and reservoirs are located. The largest majority of these gages are owned and operated by APC. APC also utilizes data from relevant USGS gages. The rainfall gages and river gages are equipped with Data Collecting Platforms that store data on site and transmit to orbiting satellites. The stations continuously collect various types of data including stage, flow, and precipitation. The data are stored at the gage location and are transmitted to orbiting satellites. All the rainfall, reservoir, and river stage reporting gages regularly used by the Corps and APC in the ACT Basin, including the Coosa River Basin above H. Neely Henry Dam, are shown on Plate 5-1. Figure 5-1 shows a typical encoder with wheel tape housed in a stilling well used for measuring river stage or lake elevation. Figure 5-2 shows a typical precipitation station, with rain gage, solar panel, and Geostationary Operational Environmental Satellite (GOES) antenna for transmission of data.



Figure 5-1 Typical Encoder with Wheel Tape for Measuring the River Stage or Lake Elevation in the Stilling Well



Figure 5-2 Typical Field Installation of a Precipitation Gage

All rainfall gages equipped as Data Collection Platforms are capable of being part of the reporting network. Data are available from many stations in and adjacent to the ACT Basin. For operation of the H. Neely Henry Project, APC operates the HDAS that delivers real time rainfall and river stage data through SouthernLINC packet data radios and dedicated network connections. The rainfall stations APC uses to operate the facility are listed in Table 5-1. The sites in the vicinity of H. Neely Henry are shown on Plate 5-1, along with other gage locations.

Table 5-1 Rainfall Reporting Network for the Coosa Basin above H. Neely Henry Dam

Basin	Station
Etowah River Below Allatoona Dam Oostanaula River	Dallas, GA
	Dalton, GA
	Adairsville, GA
Coosa River Above Weiss Dam	LaFayette, GA
	Mt. Alto, GA
	Cedartown, GA
	Menlo, AL
	Gaylesville, AL
	Fort Payne, AL
	Blue Pond, AL
	Weiss Dam, AL
Coosa River Weiss Dam to Henry	Collinsville, AL
	Rock Run, AL
	Ellisville, AL
	Colvin Gap, AL
	Gadsden, AL
	Gadsden SP., AL
	Crudup, AL
	Ashville, AL
	Anniston, AL
	Steele, AL
	H. Neely Henry Dam, AL

All river stage gages equipped as Data Collection Platforms are also capable of being part of the reporting network. Data are available from many stations in and adjacent to the ACT Basin. The river stage reporting network gages used for operation of the H. Neely Henry Dam are shown in the Table 5-2. The locations of river stage stations are shown on Plate 5-1.

Data are collected at sites throughout the ACT Basin through a variety of sources and integrated into one verified and validated central database. The basis for automated data collection at a gage location is the Data Collection Platform. The Data Collection Platform is a computer microprocessor at the gage site. A Data Collection Platform has the capability to interrogate sensors at regular intervals to obtain real-time information (e.g., river stage, reservoir elevation, water and air temperature, precipitation). The Data Collection Platform then saves the information, performs simple analysis of it, and then transmits the information to a fixed

geostationary satellite. Data Collection Platforms transmit real-time data at regular intervals to the GOES System operated by NOAA. The GOES Satellite's Data Collection System sends the data directly down to the NOAA Satellite and Information Service in Wallops Island, Virginia.

Table 5-2 River Stage Reporting Network for H. Neely Henry Dam

Stream	Station	USGS Station ID	River Miles Above Mouth	Drainage Area (sq mi)
Etowah River Basin Below Allatoona Dam				
Etowah River	Allatoona	2394000	47.00	1,122
Etowah River	Cartersville at GA 61	2394670	38.22	1,330
Etowah River	Kingston (Nr) (4)	2395000	21.51	1,630
Etowah River	Rome (GA Loop 1)	2395980	1.80	1,801
Etowah River	Rome (Coosa Valley F.G.)	2395996	0.90	1,816
Oostanaula River Basin				
Talking Rock Cree	Talking Rock	2382200		119
Coosawattee River	Ellijay	2380500	1.00	90
Coosawattee River	Carters (Tailrace)	2382500	24.91	521
Coosawattee River	Pine Chapel	2383520	6.60	856
Conasauga River	Eton	2384500	42.67	252
Conasauga River	Tilton	2387000	12.14	682
Oostanaula River	Resaca	2387500	43.16	1,610
Oostanaula River	Calhoun	2387520	36.41	1,624
Oostanaula River	Rome	2388500	4.50	2,115
Oostanaula River	ROME (US 27)	2388525	0.3	2,149
Coosa River Basin Above Weiss Powerhouse				
Coosa B	Near Rome (Mayo's Bar)	2397000	278.8	4,040
Chattooga R	Summerville	2398000	-	192
Chattooga B.	Gaylesville	2398300	20.1	366
Little River	Blue Pond	2399200	7.5	199
Terrapin Creek	Ellisville	2400100	6.7	252
Weiss to Henry				
Coosa River	Gadsden	2400500	174.6	5,800
Coosa River	Gadsden SP	2400496	174.6	5,800
Big Wills Creek	Crudup (Reece City)	2401000	171.23	182
Big Canoe Creek	Ashville	2401390	154.26	141

The data are then rebroadcast over a domestic communications satellite (DOMSAT). The Mobile District Water Management Section operates and maintains a Local Readout Ground System (LRGS) that collects the Data Collection Platform-transmitted, real-time data from the DOMSAT. Figure 5-3 depicts a typical schematic of how the system operates.

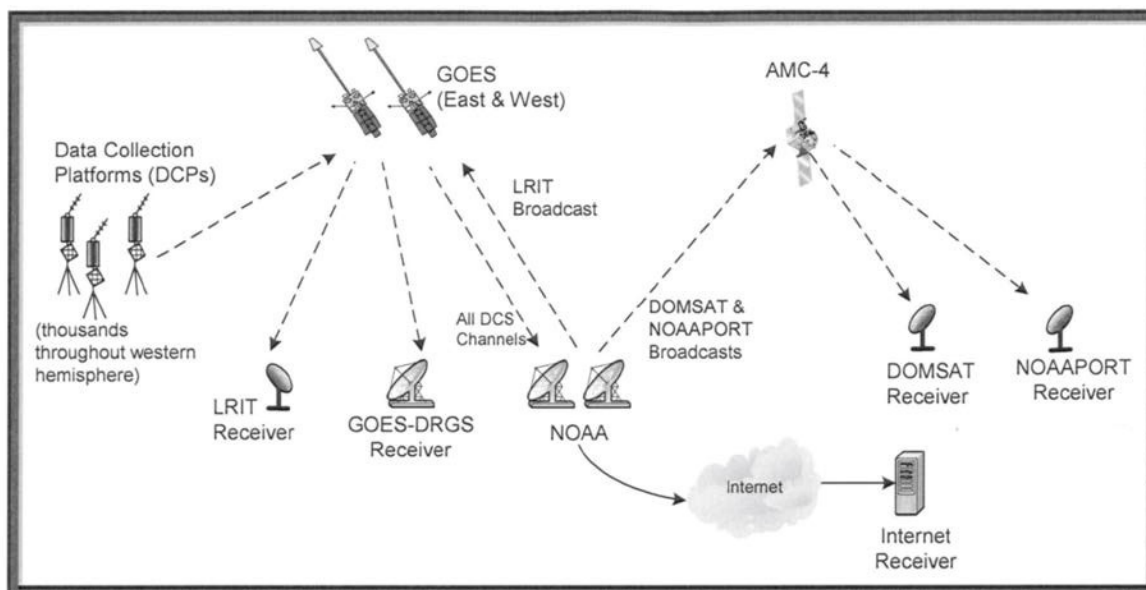


Figure 5-3 Typical Configuration of the GOES System

b. Reporting. Central to APC hydro operations, monitoring, and reporting network is the Hydro Optimization Management System (HOMS). HOMS is a complex and dynamic system of data collection, analysis, and management tools, and includes an arrangement of hydrologic and flow monitoring systems and tools as well. HOMS exists for the purpose of real time monitoring, and as a decision tool and support for computer applications related to the operation of Alabama Power's 14 hydroelectric facilities located within the Coosa, Tallapoosa and Black Warrior River Basins.

The Corps operates and maintains a Water Control Data System (WCDS) for the Mobile District that integrates large volumes of hydrometeorological and project data so the basin can be regulated to meet the operational objectives of the system. The WCDS, in combination with the new Corps Water Management System (CWMS), together automate and integrate data acquisition, data management, and data dissemination.

c. Maintenance. Maintenance of data reporting equipment in the Coosa River Basin near H. Neely Henry Dam is a cooperative effort among the APC, USGS, NWS, and Corps.

If gages appear to be out of service, the following agencies can be contacted for repair:

USGS South Atlantic Water Science Center - Georgia, 1770 Corporate Dr., Suite 500,
Norcross, Georgia 30093, Phone: (678) 924-6700 Web: <http://ga.water.usgs.gov>

USGS Lower Mississippi-Gulf Water Science Center - Alabama, 75 TechnaCenter Drive,
Montgomery, Alabama 36117, Phone: (334) 395-4120 Web: <http://al.water.usgs.gov>

NWS Southern Region, 819 Taylor Street, Room 10E09, Fort Worth, TX 76102,
Phone: (817) 978-1100 Web: <https://www.weather.gov/srh/welcome>

U.S. Army Corps of Engineers, Mobile District, 109 Saint Joseph Street, Mobile, AL 36602-3630, Phone: (251) 690-2730 Web: <https://www.sam.usace.army.mil/Missions/Civil-Works/Water-Management/>

5-02. Water Quality Stations. Water quality measurements are made at 14 USGS gaging stations within the Alabama River Basin. The data for these stations can be obtained from the USGS yearly publication, *Water Resources Data Alabama* and *Water Resources Data Georgia*.

5-03. Sediment Stations. There are known cross sections of the reservoir available which can be used to establish ranges for sedimentation and retrogression surveys as the need arises.

5-04. Recording Hydrologic Data. At H. Neely Henry Dam, the plant control system is equipped with one or more programmable logic controllers (PLC). The PLC receives data from various inputs from the dam; then a server located at APC's corporate headquarters polls the plant PLC for data. Additional data essential to HOMS is collected through HDAS, a combination of over 100 rain, stage, and evaporation gages located in the river basins where APC dams and reservoirs are located. The largest majority of these gages are owned and operated by APC. Where physically practical, APC pulls data from adjacent USGS rain and stage gages to enhance the viability of the overall HDAS. All data collected in the field are transmitted either via APC's dedicated network connections, where available, or the SouthernLINC Wireless radio network. Data are stored on servers located at the APC facilities.

Data collected from the various sources are then rendered into web and desktop applications to monitor operations and activities at the APC hydro facilities. These applications are provided to the Power System Coordinator (PSC) at the Alabama Control Center Hydro Desk (ACC or Hydro Desk) to monitor the operations and activities at hydropower facilities 24 hours per day, seven days per week.

Most reservoir data are transmitted in hourly increments for inclusion in daily log sheets that are retained indefinitely. Gage data are transmitted in increments of 15 minutes, one hour, or other intervals. Reservoir data are examined and recorded in water control models every morning (or other times when needed). Reservoir data are examined and recorded as needed. The data may be used in forecast models.

Automated timed processes also provide provisional real-time data needed for support of real-time operational decisions. Interagency data exchange has been implemented with the USGS and NWS Southeast River Forecast Center (SERFC). A direct link to SERFC is maintained to provide real-time products generated by NWS offices. Information includes weather and flood forecasts and warnings, tropical storm information, Next Generation Weather Radar (NEXRAD) radar rainfall, graphical weather maps, and more. Likewise, a direct link to USGS gages in the field allows for direct downloading of USGS data to Corps databases.

5-05. Communications Network.

a. Regulating Office with Project Office. Direct communication between the APC and H. Neely Henry Dam is provided by the company's SouthernLINC network telephone and email. The power plant at H. Neely Henry Dam is operated by remote control from the Alabama Control Center Hydro Desk located in Birmingham, Alabama. Personnel are available but not always on duty at the dam.

b. Between Project Office and Others. The Corps communicates regularly with APC Reservoir Management to discuss project and basin conditions. Additionally, communication with APC and the NWS is conducted to exchange data and forecasting information. The data exchange is made by computer and is supplemented by telephone and facsimile when necessary. The Water Management Section also has a computer link with the NWS's Advanced Weather Interactive Processing System (AWIPS) communication system via the

River Forecast Center in Peachtree City, Georgia. The Water Management Section uses a telephone auto-answer recorded message to provide daily information to the public. Information for the H. Neely Henry Lake is provided by APC at <https://apcshorelines.com/our-lakes/>. Water resources information for the H. Neely Henry Project is also available to the public at the Corps' website, <https://www.sam.usace.army.mil/Missions/Civil-Works/Water-Management/>. The sites contain real-time information, historical data and general information.

Emergency communication for the Corps and APC personnel during non-duty hours is available at the numbers found on the emergency contact information list located in Exhibit G.

5-06. Project Reporting Instructions. Communications for exchange of data between the Corps Water Management Section and APC Reservoir Management and ACC Hydro Desk will normally be accomplished by electronic transmission to the Corps' WCDS server. The APC provides the Corps with hourly and daily reservoir data for all of their ACT projects. This includes reservoir pool and tailwater elevations, inflows, discharges, and precipitation. APC also provides 7-day discharge forecasts for each project. The hourly data are transmitted and stored in the Corps database once every hour, 24 hours a day. Daily data, including the 7-day forecast for each project, are provided once a day around 0800 hours, and includes both midnight and 0600 hours data for the APC projects.

In addition to automated data, project operators maintain record logs of gate position, water elevation, and other relevant hydrological information including inflow and discharge. This information is stored by the APC and the Corps Water Management Section. Unforeseen or emergency conditions at the project that require unscheduled manipulations of the reservoir should be reported to the Mobile District Water Management Section as soon as possible.

If the automatic data collection and transfer are not working, operators will, upon request, fax or email daily or hourly project data to the Water Management Section for manual input to the database.

5-07. Warnings. During floods, dangerous flow conditions, or other emergencies, the proper authorities and the public must be informed. In general, flood warnings are coupled with river forecasting. The NWS has the federal responsibility for issuing flood forecasts to the public, and that agency will have the lead role for disseminating the information. For emergencies involving the H. Neely Henry Project, the operator on duty should begin notifications of local law enforcement, government officials, and emergency management agencies in accordance with APC's Emergency Action Plan for Henry Dam.

5-08. Role of Regulating Office. Regulating authority for the H. Neely Henry Project is shared between APC, FERC, and the Corps in accordance with the MOU that was adopted by APC and the Corps prior to the completion of the project. The purpose of the MOU is to clarify the responsibilities of the two agencies with regard to the operation of the project for flood risk management and to provide direction for the orderly exchange of hydrologic data. The Water Management Section of the Mobile District Office is responsible for developing operating procedures for flood conditions and to prepare water control manuals, such as this one, that describe water management regulation for flood risk management and navigation support at the project. These water control manuals are regularly reviewed and updated as needed.

6 - HYDROLOGIC FORECASTS

6-01. General. Obtaining forecasts for the operation of the H. Neely Henry Dam is the responsibility of the APC. The APC, the NWS, and the Corps exchange data daily to provide quality forecasts on inflows, headwater elevations, tailwater elevations, and river stages.

a. Role of the Corps. The Corps Water Management Section obtains flow estimates for the APC projects on a daily basis. Sub-daily updates are obtained as necessary. The Water Management Section considers these inflows, local flows, current pool levels, and discharge requirements in scheduling releases from downstream federal projects on the Alabama River. The Water Management Section maintains records of precipitation, river stages, reservoir elevations, and general streamflow conditions throughout the Mobile District, with special emphasis on the areas affecting or affected by reservoir operation. The Water Management Section performs the following duties in connection with the operation of the H. Neely Henry project:

- 1) Maintains liaison with personnel of APC Reservoir Management for the daily exchange of hydrologic data.
- 2) Maintains records of rainfall and river stages for the Coosa River Basin, and records of pool level and outflow at H. Neely Henry Dam and other impoundments in the basin.
- 3) Monitors operation of the power plant and spillway at H. Neely Henry Dam for compliance with the regulation schedule for flood risk management operation.
- 4) Transmits to APC Reservoir Management any instructions for special operations which may be required due to unusual flood conditions. (Except in emergencies where time does not permit, these instructions will first be cleared with the Water Management Section.)
- 5) Evaluate special water control deviation requests submitted by APC Reservoir Management and provide approval or disapproval.

The Water Management Section maintains close liaison with the NWS's River Forecast Center in Peachtree City, Georgia and their Birmingham, Alabama offices at all times to receive forecast and other data as needed. A mutual exchange of information increases the forecasting capability of the NWS at NWS river stations which may be affected by operations at Corps projects.

b. Role of Alabama Power Company. The flood risk management regulation schedule that has been adopted is based on current reservoir level and inflows. APC has developed a computer model of the river system that utilizes rainfall and river gage stations located strategically throughout the basin. APC is continually evaluating the results, and as experience is gained, improvements will be incorporated into the model.

c. Role of Other Agencies. The NWS is responsible for preparing and publicly disseminating forecasts relating to precipitation, temperatures, and other meteorological elements related to weather and weather-related forecasting in the ACT Basin. For the Coosa River Basin, forecasts are prepared by the NWS's SERFC located in Peachtree City, Georgia, and are issued through their office in Birmingham, Alabama. The Water Management Section uses the NWS as a key source of information for weather forecasts. The meteorological forecasting provided by the NWS is considered critical to the Corps' water resources management mission. The 24- and 48-hour Quantitative Precipitation Forecasts (QPFs) are invaluable in providing

guidance for basin release determinations during normal operations. Using precipitation forecasts and subsequent runoff directly relates to project release decisions.

1) The NWS is the federal agency responsible for preparing and issuing streamflow and river-stage forecasts for public dissemination. The SERFC routinely prepares and distributes five-day streamflow and river-stage forecasts at key gaging stations along the Alabama, Coosa, and Tallapoosa Rivers. Streamflow forecasts are available at additional forecast points during periods above normal rainfall. In addition, SERFC provides a revised regional QPF on the basis of local expertise beyond the NWS Hydrologic Prediction Center QPF. SERFC also provides the Water Management Section with flow forecasts for selected locations on request.

2) The Corps and SERFC have a cyclical procedure for providing forecast data between federal agencies. As soon as reservoir release decisions have been planned and scheduled for the proceeding days, the release decision data are sent to SERFC. Taking release decision data, coupled with local inflow forecasts at forecast points along the ACT, SERFC can provide inflow forecasts into Corps and APC projects. Having revised inflow forecasts from SERFC, the Corps and APC have up-to-date forecast data to make the following days' release decisions.

6-02. Flood Condition Forecasts. During flood conditions, quantifiable flow forecasts are prepared based on rainfall that has already fallen. Operational decisions are made on the basis of actual streamflow and/or stage data. Streamflow and/or stage forecasts resulting from rainfall that has already occurred are considered in the planning process of potential future operations including any deviations that may need to be obtained. The flood evacuation schedule for H. Neely Henry Reservoir is based on the actual elevation at Gadsden, Alabama. There are exceptions to the flood evacuation schedule that rely on weather forecast and expected releases from the upstream Weiss Project. Details are provided in Paragraph 7-05. APC prepares flow and stage forecasts on an as needed basis for internal use and decision support, where applicable. The official stage forecast at Gadsden will be provided by the NWS SERFC and is publicly available on their website.

a. Requirements. Accurate flood forecasting requires a knowledge of antecedent conditions, rainfall and runoff that has occurred, and tables or unit hydrographs to apply the runoff to existing flow conditions. Predictive QPF data are needed for what if scenarios.

b. Methods. When hydrologic conditions exist so that all or portions of the ACT Basin are considered to be flooding, existing streamflow, and short- and long-range forecasting runoff models are run on a more frequent, as-needed basis. Experience demonstrates that the sooner a significant flood event can be recognized and the appropriate release of flows scheduled, an improvement in overall flood risk management can be achieved. Stored stormwater that has accumulated from significant rainfall events must be evacuated following the event and as downstream conditions permit to provide effective flood risk management. Flood risk management carries the highest priority during significant runoff events that pose a threat to public health and safety. The accumulation and evacuation of flood storage for the authorized purpose of flood risk management is accomplished in a manner that will prevent, insofar as possible, flows exceeding those which will cause flood damage downstream and upstream at Gadsden, Alabama. During periods of significant basin flooding, the frequency of contacts between the APC, Water Management Section, and SERFC staff are increased to allow a complete interchange of available data upon which the most reliable forecasts and subsequent project regulation can be based. Table 6-1 provides SERFC forecast locations in the Alabama River Basin.

Table 6-1 SERFC Forecast Locations for the Alabama River Basin

Daily Stage/Elevation Forecasts				
	Station	Station ID	Critical Stage (ft)	Flood Stage (ft)
	Montgomery	MGMA1	26	35
	R. F. Henry TW	TYLA1		122
	Millers Ferry TW	MRFA1		66
	Claiborne TW	CLBA1	35	42
Daily 24-hour Inflow in 1000 SFD Forecast				
Reservoir		Station ID		
R. F. Henry		TYLA1		
Millers Ferry		MRFA1		
Additional Stage Forecasts Only for Significant Rises				
River/Creek	Station	Station ID	Critical Stage (ft)	Flood Stage (ft)
Coosa	Weiss Dam	CREA1		564
Coosa	Gadsden	GAPA1		511
Coosa	Logan Martin Dam	CCSA1		465
Coosa	Childersburg	CHLA1		402
Coosa	Wetumpka	WETA1	40	45
Tallapoosa	Wadley	WDLA1		13
Tallapoosa	Milstead	MILA1	15	40
Tallapoosa	Tallapoosa Water Plant	MGYA1	15	25
Catoma Creek	Montgomery	CATA1	16	20
Alabama	Selma	SELA1	30	45
Cahaba	Cahaba Heights	CHGA1		14
Cahaba	Centreville	CKLA1	20	23
Cahaba	Suttle	SUTA1	28	32
Cahaba	Marion Junction	MNJA1	15	36

Intentionally left blank.

7 - WATER CONTROL PLAN

7-01. General Objectives. The H. Neely Henry Project will normally operate to produce peaking hydropower. During periods of low streamflow, hydropower generation will also be used to augment the flow into the Logan Martin Reservoir downstream.

7-02. Constraints. APC releases water from the H. Neely Henry Project in conjunction with other reservoirs to provide a weekly volume of flow to the Alabama River for navigation.

7-03. Overall Plan for Water Control.

a. General Regulation. The water control operations of H. Neely Henry Dam are in accordance with the regulation schedule as outlined in the following paragraphs. Any deviation from the prescribed instructions during flood operations will be at the direction of the Water Management Section. Deviations during normal operations will be coordinated with the APC Reservoir Management. Mobile Water Management Section will notify South Atlantic Division (SAD) regarding all deviations.

b. Basin above H. Neely Henry Project. Allatoona Dam controls the runoff from approximately 17 percent of the total drainage area above H. Neely Henry Dam. During flood events, the discharge from Allatoona Dam is reduced or eliminated until downstream stages have receded to within banks in the Rome, Georgia, area except in the most extreme event and the Allatoona Project is in an induced surcharge operation. Flood flows at Rome, Georgia and on the Coosa River are further reduced by the operation of Carters Dam, which controls an additional 5.7 percent of the total area above H. Neely Henry Dam. Excess flood waters stored in these two reservoirs are released at non-damaging rates after the discharge on the Coosa River at Rome, Georgia has dropped below bankfull stage. The runoff from 74 percent of the remaining area above H. Neely Henry Dam is controlled by Weiss Dam to the maximum extent possible within its storage capability.

c. H. Neely Henry Project. The total flood risk management storage required in the Coosa River development by Public Law 436 has been provided in two projects, Weiss and Logan Martin. No storage has been allocated for flood risk management in the H. Neely Henry Reservoir. Flood operations at H. Neely Henry Dam will consist of evacuation of a seasonally varying amount of storage based upon actual river stage levels at Gadsden, Alabama to lower the flood profile through the reservoir, thereby protecting Gadsden, Alabama (approximately 26 miles upstream of dam) to some extent. The effectiveness of this operation is dependent on coordination with operations at Weiss Dam upstream and Logan Martin downstream. Evacuation is used as a means of reducing the backwater effect of the reservoir at Gadsden, Alabama during flood conditions. This is referred to as hinge pool operation, which lowers the pool for a damage reach within the reservoir. Drainage areas at principal points and tributary junctions in the area influenced by the H. Neely Henry Project are listed in Table 7-1.

d. Correlation with Other Projects. H. Neely Henry is one of a series of dams constructed by APC to take advantage of the available head of the Coosa River for power. These dams also provide a substantially continuous series of pools which will serve the needs of navigation if navigation facilities are constructed. In addition, flood risk management storage is provided in Weiss and Logan Martin. In any such comprehensive stream development, operations at any one project, particularly a storage reservoir, will affect, to some degree, the projects downstream. For example, operations of the Weiss Project affect the inflows to all of the other Coosa River projects. In turn, the inflows into the Weiss Project are affected by operations of

the Corps' Allatoona Project, located on the Etowah River 48 miles above Rome, Georgia, and by the Corps' Carters Project, located on the Coosawattee River 73.8 miles above Rome, Georgia. However, while the flood risk management regulation plans for the Allatoona and Carters Projects are somewhat interrelated, the regulation plans for flood risk management at Weiss and Logan Martin Projects, have been developed so that operations during the rising phase of a flood are completely independent of each other. Following a flood, the emptying of flood storage at Allatoona and Carters may prolong the time required to evacuate flood storage at Weiss and Logan Martin. Insofar as practicable, releases from all these projects will be made so as to minimize any undesirable condition that might be created by the emptying operations. Also, in the event of a localized storm centered over one of the downstream reservoirs, operations at the upstream projects may be modified to reduce outflow to the maximum extent feasible to alleviate the downstream flood conditions as much as possible. The Corps and APC maintain regular and rapid exchange of data in order to provide the fullest coordination of their operations.

e. Minimum Flow Agreement. Flow in the Alabama River is largely controlled by APC impoundments on the Coosa and Tallapoosa Rivers. Pursuant to articles in the FERC licenses for these impoundments, a minimum discharge must be released to support navigation on the Alabama River. These flows also benefit downstream water quality. Under the terms of the previous negotiated agreement, APC projects would provide releases from the Jordan/Bouldin Project on the Coosa and Thurlow Project on the Tallapoosa Rivers equal to a continuous minimum 7-day average flow of 4,640-cfs (32,480 day-second-feet [dsf]/7 days). This minimum flow target of 4,640 cfs was originally derived from the 7-day average 10-year frequency low flow (7Q10) at Claiborne Lake of 6,600 cfs (determined from the observed flow between 1929 – 1981 at USGS gage # 02429500, Alabama River at Claiborne, Alabama). Those flows were established with the understanding that if APC provided 4,640 cfs, the Corps and intervening basin inflow would be able to provide the remaining water to meet 6,600 cfs at Claiborne Lake. However, as dry conditions continued in 2007, water managers realized that, if the basin inflows from rainfall were insufficient, the minimum flow target would not likely be achievable. Therefore, in coordination with APC, drought operations for the middle reaches of the ACT Basin have been revised and are described in detail in Exhibit D, *ACT River Basin Drought Contingency Plan*. The Drought Contingency Plan is summarized in Paragraph 7-10 of this manual. The drought contingency plan flows are described in Table 7-6, ACT Drought Management Plan.

Table 7-1 Drainage Areas of the Coosa River above Childersburg, Alabama

River Miles above Mouth	Location	Stream	Coosa Drainage Area (sq. mi)
86.29	USGS Gage 02407000	Coosa River at Childersburg, AL	8,390
99.50	Logan Martin	Coosa River	7,743
148.00	H. Neely Henry	Coosa River	6,596
172.90	USGS Gage 02400500	Coosa River at Gadsden, AL	5,805
174.80	USGS Gage 02400496	Coosa River at Gadsden Steam Plant near Gadsden, AL	5,800
206.25	Weiss Powerhouse	Coosa River at Outlet Canal	5,610
220.20	Below Junction Terrapin Cr	Coosa River	5,571
	USGS Gage 02400100	Terrapin Creek at Ellisville, AL	252
	Weiss Dam	Coosa River	5,270
232.98	Below Junction Chattooga R	Coosa River	5,208
	USGS Gage 02398300	Chattooga River above Gaylesville, AL	368
278.65	USGS Gage 02397000 (Mayo's Bar)	Coosa River near Rome, GA	4,040
285.78	Head of Coosa River	Confluence of Oostanaula River and Etowah River at Rome, GA	4,010
River Miles above Mouth	Location	Stream	Etowah Drainage Area (sq. mi)
0	Head of Coosa River	Etowah River	1,861
47.86	Allatoona Dam	Etowah River	1,122
River Miles above Mouth	Location	Stream	Oostanaula Drainage Area (sq. mi)
0	Head of Coosa River	Oostanaula River	2,150
0.3	USGS Gage 02388530	Oostanaula River at 5th Ave, at Rome, GA	2,149
43.16	USGS Gage 02387500	Oostanaula River at Resaca, GA	1,610
46.95	Head of Oostanaula R	Confluence of Conasauga River and Coosawattee River	1,596
River Miles above Mouth	Location	Stream	Oostanaula Drainage Area (sq. mi)
0	Head of Oostanaula River	Coosawattee River	862
24.90	USGS Gage 02382500	Coosawattee River at Carters, GA	531
26.80	Carters Dam	Coosawattee River	374

7-04. Standing Instructions to Project Operator.

a. Power operations. Power operations at H. Neely Henry are scheduled as outlined in Section 7-08. The seasonally varying top-of-power-pool curve is shown on Plate 7-1.

b. Spillway Gate Operating Schedule. The operation of the spillway gates will be in accordance with the gate opening schedule as shown on Plate 2-6. APC Reservoir Management will determine the appropriate discharge and set the gates to the step that will produce a discharge as near as practical to that rate.

7-05. Flood Risk Management. In order to minimize flood damages in the Gadsden, Alabama area of the H. Neely Henry Project, the reservoir will be drawn down below its normal operating level. The time to begin evacuation, the rate of evacuation, and the elevation to which the lake will be lowered will be determined by the elevation at the Gadsden Steam Plant gage (USGS No. 02400496) as described below in "Lake Evacuation Procedures" and shown on Plate 7-2. A series of trigger points at 0.5 foot increments between 508 feet NGVD29 and 511 feet NGVD29 at the Gadsden Steam Plant gage correspond to the lowering (and raising) of the water elevation at H. Neely Henry Dam in increments down to 502.5 feet NGVD29. In times of rapidly rising water at Gadsden crossing multiple trigger points, raise the initial evacuation rate of 1 foot in 12 hours by multiple times. There are three adjustments or exceptions to the Evacuation Rate Schedule:

Exception 1: When the guide curve for H. Neely Henry Lake is at 508 feet NGVD29, the initial trigger point at the Gadsden Steam Plant gage (508.5 feet NGVD29) will be skipped if the following three conditions are met:

Gadsden Steam Plant gage does not exceed 509 feet NGVD29,

Weather forecasts do not indicate significant rain potential, and

Weiss releases are not expected to go above approximately 26,000 cfs (3 unit full gate operation) in the next 24 hours.

Should any of these three conditions change, then the evacuation rate schedule should be initiated, or if H. Neely Henry Lake reaches the third trigger point (509.0 feet NGVD29), then the evacuation rate should be doubled to reach the second step of the drawdown so as to return to the schedule.

Exception 2: If after the initial stage of evacuation, the Gadsden elevation begins to fall, then H. Neely Henry elevation may be allowed to rise so long as the following conditions are met:

Gadsden Steam Plant gage does not exceed 510 feet NGVD29,

Weather forecasts do not indicate significant rain potential,

Inflows into H. Neely Henry Lake are not increasing, and

Weiss releases are not expected to go above 40,000 cfs in the next 24 hours.

Should any of these four conditions change then the evacuation rate schedule should be reinitiated.

Exception 3: Immediately below H. Neely Henry Dam, APC has acquired flood rights to elevation 490 feet NGVD29 for the Logan Martin Lake. This corresponds to a discharge of approximately 96,000 cfs. The evacuation is to proceed according to the schedule until the release reaches approximately 96,000 cfs whereupon the rate of evacuation will be reduced all

the way to zero if needed to maintain a release of approximately 96,000 cfs. At that point the release can be increased to prevent the pool from rising and the maximum rate of release will continue until the reservoir reaches 502.5 feet NGVD29 or the spillway gates are raised out of the water.

Normally flood risk management operation will be in accordance with the regulation plan described above. However, in the event of a major storm over the Coosa River basin, APC and the District Commander, USACE Mobile District will collaborate in the prompt analysis of all available information and in the formation of special operating procedures appropriate to the circumstances as they relate to the maintenance of power output and most effective utilization of flood risk management capacities. The collaboration includes but is not limited to exchange of forecasted releases of upstream USACE projects, projected APC pool elevations, inflows and discharges, joint communication with SERFC staff, sharing forecast modeling results, and relevant ground observations.

Any departure from the regulation schedule will require approval by the Division Commander or their delegated authority and is coordinated by the Water Management Section Chief. Details of the forecasting procedures, which will be developed by APC with the concurrence of the District Commander, USACE Mobile District and which will be revised from time to time as experience dictates, will be contained in Section 6-02.

a. Lake Evacuation Procedures. The evacuation plan described above will lower flood profiles through the downstream portion of the reservoir, thus reducing flood peaks at Gadsden. However, the pre-flood evacuation of up to 51,500 acre-feet of storage from the H. Neely Henry Lake will increase the inflows into Logan Martin Lake at the beginning of a flood. Under certain conditions of storm rainfall distribution over the area, the evacuation releases from H. Neely Henry Dam could combine with local flood inflows so as to reduce the effectiveness of the Logan Martin Project in controlling flood stages downstream. All evacuation operations will be analyzed and if the overall effect shown to be detrimental to flood risk management operations, the plan will be modified to the extent necessary. This modification is a planned deviation and will be analyzed on its own merits. Sufficient data on flood potential, lake and watershed conditions, possible alternative measures, benefits to be expected, and probable effects will be presented by letter or electronic mail to the Water Management Section for review and approval. Mobile District will coordinate the approval with SAD. This analysis is a joint operation by the Corps and the APC. Whenever a discharge of 50,000 cfs from Logan Martin Dam results in an evacuation operation, data on pool and tailwater elevation, and inflows and outflows are provided to the Corps by the APC. These data are analyzed and results discussed with the APC. Instructions will then be issued to alter any operations considered detrimental to flood risk management as an approved deviation.

The flood risk management operating plans described above are designed to provide optimum benefits for the limited storage available in the project. However, in the event of a major storm over the basin, these plans may be modified. This modification is a planned deviation and will be analyzed on its own merits. Sufficient data on flood potential, lake and watershed conditions, possible alternative measures, benefits to be expected, and probable effects will be presented by letter or electronic mail to the Water Management Section for review and approval. Mobile District will coordinate the approval with SAD office.

7-06. Recreation. Recreational activities are best served by maintaining a full conservation pool. Lake levels above top of conservation pool invade the camping and park sites. When the lake recedes several feet below the top of conservation pool, access to the water and beaches may become limited. Water management personnel are aware of recreational impacts resulting from reservoir fluctuations and attempt to maintain reasonable lake levels, especially during the

peak recreational use periods, but there are no specific requirements relative to maintaining recreational levels. Other project functions usually determine releases from the dam and the resulting lake levels.

7-07. Water Quality. In-lake thermal stratification is not a regular occurrence in H. Neely Henry Lake. ADEM indicates DO levels decline only slightly from the top to the bottom of the water column and water temperatures are essentially the same. The run-of-the-river nature of H. Neely Henry Lake and its shallow depths help to minimize stratification. DO impairment was not listed as a concern in the State of Alabama's 303(d) list of impaired waters, published in 2020. DO levels in downstream dam releases can result in tailwater DO levels less than State DO criteria. The releases from H. Neely Henry downstream discharges into Logan Martin Lake also decrease the amount of natural reaeration that can occur in the turbulent tailwater area.

Aeration at H. Neely Henry Dam is provided using a forced air system. Air is delivered from two centrifugal blowers installed at the east end of the dam switchyard. Each blower, driven by a 2,250-horsepower electrical motor, can produce airflow up to 24,000 standard cubic feet per minute. Discharge air from the blower passes through a heat exchanger to reduce the compressed air temperature to ambient. Both blowers are connected to a common header at the blower pad, which is routed through the plant and down to the draft tube access level. The header splits into three independently controlled branches. Each branch connects to a peripheral aerating ring that is imbedded in the draft tube wall underneath the runner. Air is permitted to the ring through two electrically operated vales. Air from the embedded ring enters the draft tube to mix with turbine discharge through a series of holes in the draft tube wall. The peripheral aerating ring is flush with the draft tube wall so there are no protrusions into the draft tube.

The aeration system is automatically controlled by a Programmable Logic Controller (PLC) using real time data from a DO monitor in the tailrace. Set points in the PLC are manually set so that the blowers automatically turn on when the DO drops to the low set point. The blowers run continually until the high set point is reached. The system piping is designed so each blower can serve any of the three generating units. Only one blower will operate for one-unit generation. A second blower will operate simultaneously with the first blower only if a second or third unit is generating. Blowers are set in lead-lag configuration to equalize their runtimes. The H. Neely Henry blowers are in automatic operation from May 1 through September 30.

From October 1 to approximately April 23, the blowers are placed in manual operation mode. Cooling water piping and the heat exchangers are drained to prevent freezing during the winter months. The motors on the blowers are bumped once a week to keep bearings lubricated and to prevent shaft sag. Air is discharged to the atmosphere when the motors are bumped. Oil is changed in the blower bearing housings and the cooling water system, including the heat exchangers, is watered up during the first week of April. The system is tested to ensure that every component is ready to be placed into automatic operation on May 1.

7-08. Hydroelectric Power. A guide curve delineating the seasonally varying, top-of-power pool level in H. Neely Henry Lake is shown on Plate 7-1. Normally, the lake level will be maintained on or below the curve except when flood inflows exceeding the discharge capacity of the spillway cause the lake level to rise. The lake is lowered each year during the flood season to elevation 507 feet NGVD29 to provide additional flood storage capacity in the system. H. Neely Henry Dam will normally operate on a weekly cycle with the hydropower generated available for use in the daily peak-load periods on Monday through Friday. When H. Neely Henry Lake is below the top of the power pool curve, the power plant will be operated in accordance with APC system power demands. Whenever the lake reaches the top of the power pool elevation, the power plant will operate as necessary, up to full-gate capacity, in an attempt

to discharge the amount of water required to keep the lake level from exceeding the top of the power pool curve elevation.

7-09. Navigation. Navigation is an important use of water resources in the ACT Basin. The Alabama River, from Montgomery downstream to the Mobile area, provides a navigation route for commercial barge traffic, serving as a regional economic resource. A minimum flow is required to ensure usable water depths to support navigation. APC releases water from their storage projects in conjunction with other reservoirs to provide a weekly volume of flow to the Alabama River. Congress has authorized continuous navigation on the river when sufficient water is available. The three Corps locks and dams on the Alabama River and a combination of dredging, river training works, and flow augmentation together support navigation depths on the river. The lack of regular dredging and routine maintenance has led to inadequate depths at times in the Alabama River navigation channel.

When supported by maintenance dredging, ACT Basin reservoir storage, and hydrologic conditions, adequate flows will provide a reliable navigation channel. In so doing, the goal of the water control plan is to ensure a predictable minimum navigable channel in the Alabama River for a continuous period that is sufficient for navigation use. Figure 7-1 shows the effect of dredging on flow requirements for different navigation channel depths using 2004–2010 survey data. As shown on Figure 7-1, pre-dredging conditions exist between November and April; dredging occurs between May and August; and post-dredging conditions exist from September through October, until November rainfall causes shoaling to occur somewhere along the navigation channel.

A 9.0-foot-deep by 200-foot-wide navigation channel is authorized on the Alabama River to Montgomery, Alabama. When a 9.0-foot channel cannot be met, a shallower 7.5-foot channel would still allow for light loaded barges moving through the navigation system. A minimum depth of 7.5 feet can provide a limited amount of navigation. Under low flow conditions, even the 7.5-foot depth has not been available at all times.

Flow releases from upstream APC projects have a direct influence on flows needed to support navigation depths on the lower Alabama River. Flows for navigation are most needed in the unregulated part of the lower Alabama River below Claiborne Lock and Dam. When flows are available, R. F. Henry, Millers Ferry, and Claiborne are regulated to maintain stable pool levels, coupled with the necessary channel maintenance dredging, to support sustained use of the authorized navigation channel and to provide the full navigation depth of nine feet. When river conditions or funding available for dredging of the river indicates that project conditions (9.0-foot channel) will probably not be attainable in the low water season, the three Alabama River projects are operated to provide flows for a reduced project channel depth as determined by surveys of the river. APC operates its reservoirs on the Coosa and Tallapoosa Rivers (specifically flows from their Jordan, Bouldin, and Thurlow [JBT] Projects) to provide a minimum navigation flow target in the Alabama River at Montgomery, Alabama. The monthly minimum navigation flow targets are shown in Table 7-2. However, flows may be reduced if conditions warrant. Additional intervening flow or drawdown discharge from the R. F. Henry and Millers Ferry Projects must be used to provide a usable depth for navigation and/or meet the 7Q10 flow of 6,600 cfs below Claiborne Dam. However, the limited storage afforded in both the R. E. “Bob” Woodruff and William “Bill” Dannelly Lakes can only help meet the 6,600 cfs level at Claiborne Lake for a short period. As local inflows diminish or the storage is exhausted, a lesser amount would be released depending on the amount of local inflows. Table 7-3 and Figure 7-2 show the required basin inflow for a 9.0-foot channel; Table 7-4 and Figure 7-3 show the required basin inflow for a 7.5-foot channel.

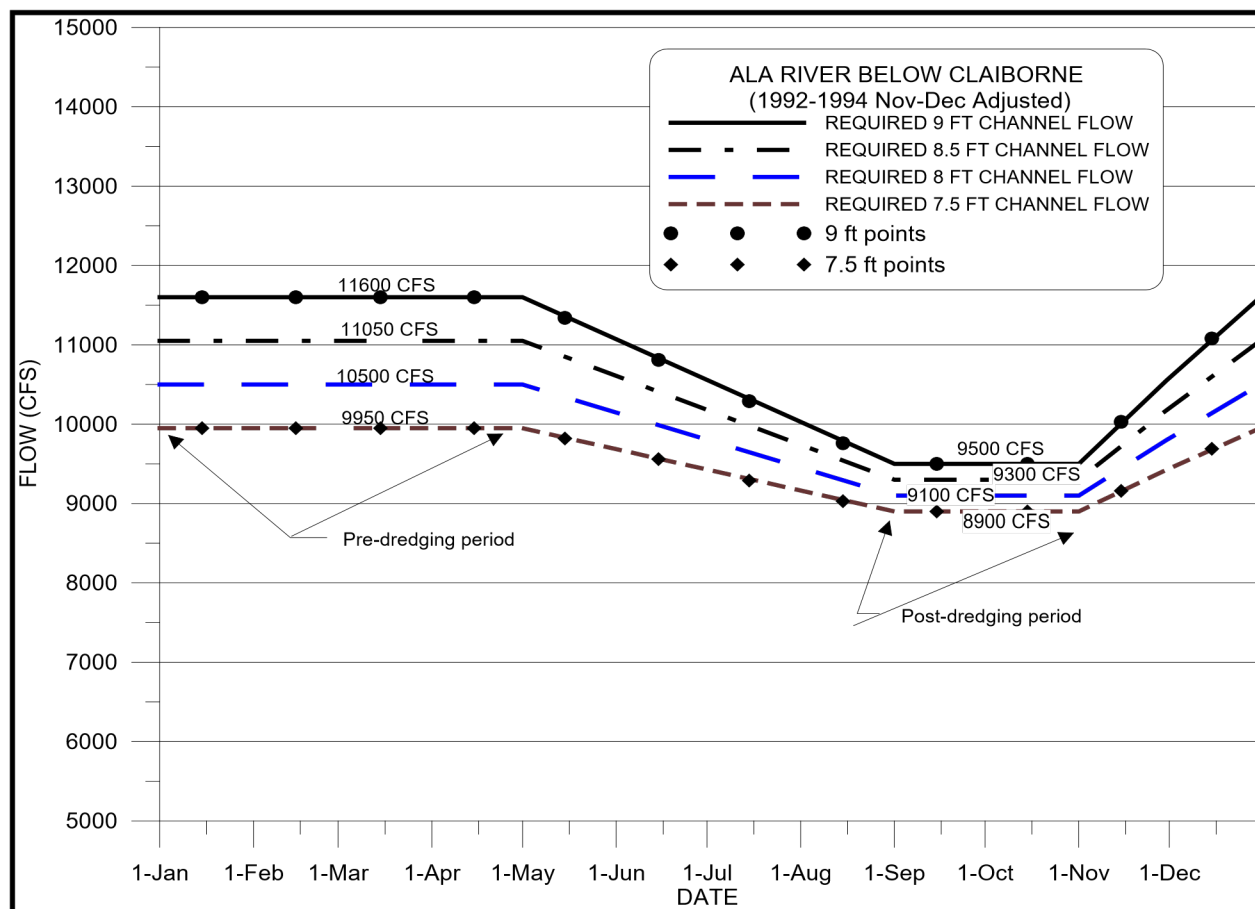


Figure 7-1 Flow-Depth Pattern (Navigation Template) Using 2004–2010 Survey Data

During low-flow periods, it is not always possible to provide the authorized 9-foot deep by 200-foot-wide channel dimensions. In recent years, funding for dredging has been reduced resulting in higher flows being required to provide the design navigation depth. In addition, recent droughts in 2000 and 2007 had a severe impact on the availability of navigation depths in the Alabama River.

Historically, navigation has been supported by releases from storage in the ACT Basin. Therefore, another critical component in the water control plan for navigation involves using an amount of storage from APC storage projects similar to that which has historically been used, but in a more efficient manner.

The ACT Basin navigation regulation plan is based on storage and flow/stage/channel depth analyses using basin inflows and average storage usage by APC (e.g., navigation operations would not be predicated on use of additional storage) during normal hydrologic conditions. Under that concept, the Corps and APC make releases that support navigation when basin inflows meet or exceed seasonal targets for either the 9.0-foot or 7.5-foot channel templates. Triggers are also identified (e.g., when basin inflow are less than required natural flows) to change operational goals between the 9.0-foot and 7.5-foot channels. Similarly, basin inflow triggers are identified when releases for navigation are suspended and only 4,640 cfs releases would occur. During drought operations, releases to support navigation are suspended until system recovery occurs as defined in the ACT Basin Drought Contingency Plan (see Exhibit D).

Table 7-2 Monthly Navigation Flow Target in cfs

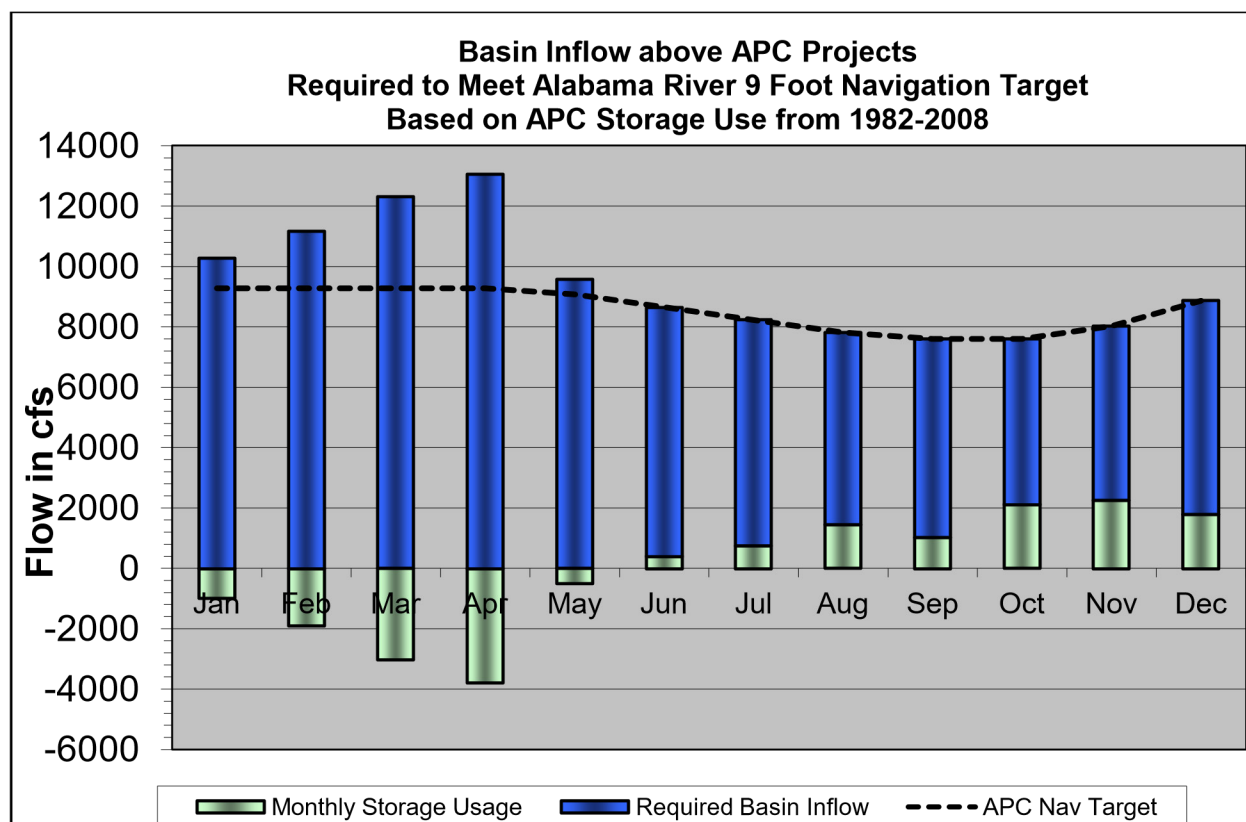
Month	9.0-ft target below Claiborne Lake (from Navigation Template) (cfs)	9.0-ft Jordan, Bouldin, Thurlow goal (cfs)	7.5-ft target below Claiborne Lake (from Navigation Template) (cfs)	7.5-ft Jordan, Bouldin, Thurlow goal (cfs)
January	11,600	9,280	9,950	7,960
February	11,600	9,280	9,950	7,960
March	11,600	9,280	9,950	7,960
April	11,600	9,280	9,950	7,960
May	11,340	9,072	9,820	7,856
June	10,810	8,648	9,560	7,648
July	10,290	8,232	9,290	7,432
August	9,760	7,808	9,030	7,224
September	9,500	7,600	8,900	7,120
October	9,500	7,600	8,900	7,120
November	10,030	8,024	9,160	7,328
December	11,080	8,864	9,690	7,752

Table 7-3 Basin inflow above APC Projects required to meet a 9.0-Foot Navigation Channel

Month	APC navigation Target (cfs)	Monthly historic storage usage (cfs)	Required basin inflow (cfs)
January	9,280	-994	10,274
February	9,280	-1,894	11,174
March	9,280	-3,028	12,308
April	9,280	-3,786	13,066
May	9,072	-499	9,571
June	8,648	412	8,236
July	8,232	749	7,483
August	7,808	1,441	6,367
September	7,600	1,025	6,575
October	7,600	2,118	5,482
November	8,024	2,263	5,761
December	8,864	1,789	7,075

Table 7-4 Basin inflow above APC Projects required to meet a 7.5-Foot Navigation Channel

Month	APC navigation Target (cfs)	Monthly historic storage usage (cfs)	Required basin inflow (cfs)
January	7,960	-994	8,954
February	7,960	-1,894	9,854
March	7,960	-3,028	10,988
April	7,960	-3,786	11,746
May	7,856	-499	8,355
June	7,648	412	7,236
July	7,432	749	6,683
August	7,224	1,441	5,783
September	7,120	1,025	6,095
October	7,120	2,118	5,002
November	7,328	2,263	5,065
December	7,752	1,789	5,963

**Figure 7-2 Flow Requirements from Rainfall (or Natural Sources) and Reservoir Storage to Achieve the JBT Goal for Navigation Flows for a 9-foot Channel**

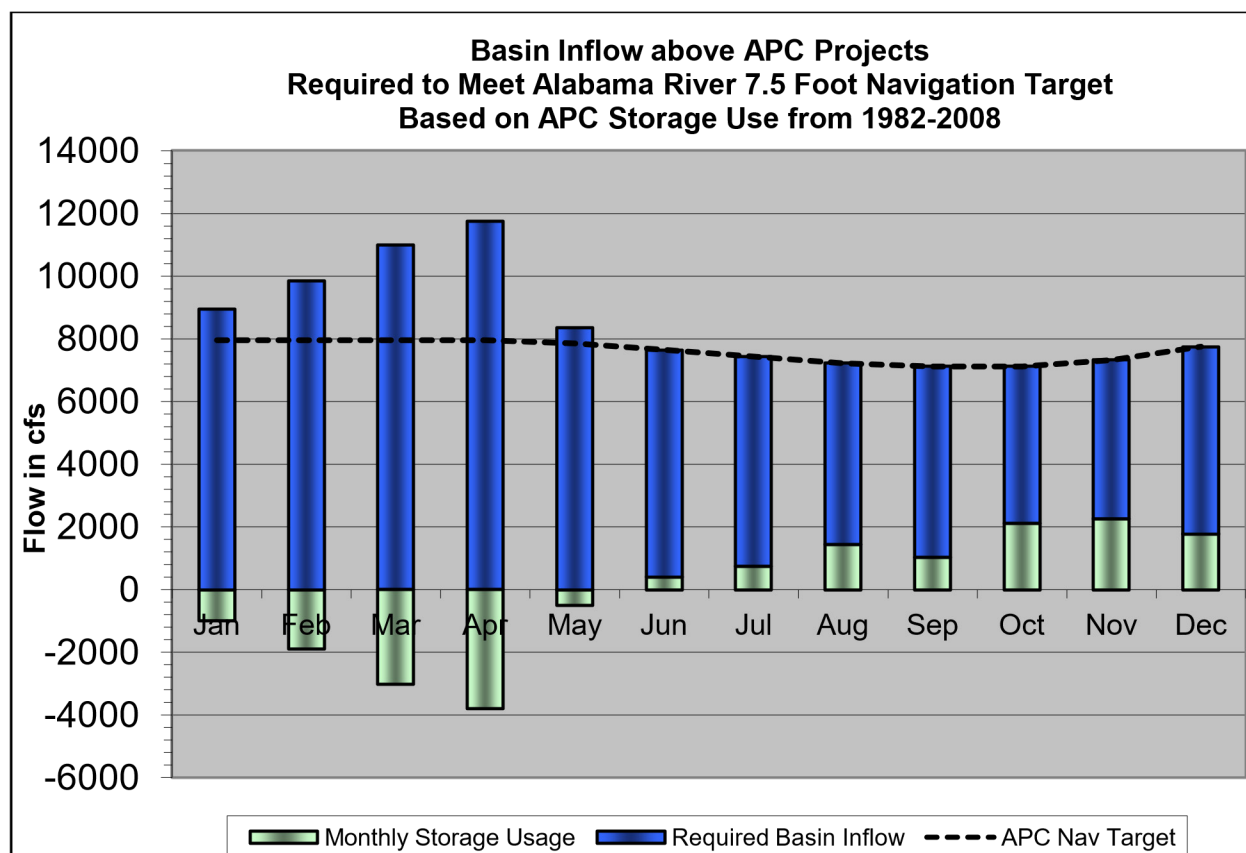


Figure 7-3 Flow Requirements from Rainfall (or Natural Sources) and Reservoir Storage to Achieve the JBT Goal for Navigation Flows for a 7.5-foot Channel

During normal flow periods, no special water control procedures are required for navigation at the R. F. Henry Project other than maintaining the proper pool level. The normal maximum allowable drawdown at elevation 123.0 feet NGVD29 provides a clearance of 13.0 feet over the upper lock sill and should provide minimum depths for a 9-foot navigation channel at Montgomery and up to Bouldin Dam. Navigable depth is normally available downstream of the project if Millers Ferry is within its normal operating level. However, shoaling between Selma and R. F. Henry may result in the need to make water releases to increase the depth over any shoals. This will be accomplished by regular or specially scheduled hydropower releases when possible.

During high flow periods, navigation will be discontinued through the R. F. Henry Lock during flood periods when the headwater reaches elevation 131.0 feet NGVD29. At this elevation the discharge will be 156,000 cfs which is expected to occur on an average of once every three years and the freeboard will be 1-foot on the guide and lock walls.

In the event that the Mobile District Water Management Section determines upcoming reductions in water releases may impact the available navigation channel depth, they shall contact the Black Warrior/Tombigbee - Alabama/Coosa Project Office and the Mobile District Navigation Section to coordinate the impact. The Water Management Section shall provide the Claiborne tailwater gage forecast to the project office and the Navigation Section. Using this forecast and the latest available project channel surveys, the project office and the Navigation Section will evaluate the potential impact to available navigation depths. Should this evaluation determine that the available channel depth is adversely impacted, the project office and the

Navigation Section will work together, providing the Water Management Section with their determination of the controlling depth. Thereafter, the project office and the Navigation Section will coordinate the issuance of a navigation bulletin. The notices will be issued as expeditiously as possible to give barge owners, and other waterway users, sufficient time to make arrangements to light load or remove their vessels before action is taken at upstream projects to reduce flows. The bulletin will be posted to the Mobile District Navigation web site at <http://navigation.sam.usace.army.mil/docs/index.asp?type=nn>.

Although special releases will not be standard practice, they could occur for a short duration to assist maintenance dredging and commercial navigation for special shipments if basin hydrologic conditions are adequate. The Corps will evaluate such requests on a case by case basis, subject to applicable laws and regulations and the basin conditions.

7-10. Drought Contingency Plan.

An ACT Basin Drought Contingency Plan (DCP) has been developed to implement water control regulation drought management actions. The plan includes operating guidelines for drought conditions and normal conditions. The H. Neely Henry Project operates in concert with other APC projects to meet the provisions of the DCP related to flow requirements from the Coosa and Tallapoosa Basins. APC and the Corps will coordinate water management during drought with other federal agencies, navigation interests, the states, and other interested parties as necessary. The following information provides a summary of the DCP water control actions for the ACT Basin projects. The drought plan is described in detail in Exhibit F, Drought Contingency Plan.

The ACT Basin Drought Plan matrix defines monthly minimum flow requirements except where noted for the Coosa, Tallapoosa, and Alabama Rivers as a function of a Drought Intensity Level (DIL) and time of year. Such flow requirements are daily averages. The ACT Basin drought plan is activated when one or more of the following drought triggers is exceeded:

1. Low basin inflow
2. Low state line flow
3. Low composite conservation storage

Drought management actions would become increasingly more austere when two triggers are exceeded (Drought Level 2) or all three are exceeded (Drought Level 3). The combined occurrences of the drought triggers determine the DIL. Table 7-5 lists the three drought operation intensity levels applicable to APC projects.

Table 7-5 ACT Basin Drought Intensity Levels

Drought Intensity Level (DIL)	Drought Level	No. of Triggers Exceeded
-	Normal Regulation	0
DIL 1	Moderate Drought	1
DIL 2	Severe Drought	2
DIL 3	Exceptional Drought	3

Drought management measures for ACT Basin-wide drought regulation consists of three major components:

- Headwater regulation at Allatoona Lake and Carters Lake in Georgia
- Regulation at APC projects on the Coosa and Tallapoosa Rivers
- Regulation at Corps projects downstream of Montgomery on the Alabama River

The headwater regulation component includes water control actions in accordance with established action zones, minimum releases, and hydropower generation releases in accordance with project water control plans. Regulation of APC projects will be in accordance with Table 7-6, ACT Drought Management Plan, in which the drought response will be triggered by one or more of the three indicators - state line flows, basin inflow, or composite conservation storage. Corps operation of its Alabama River projects downstream of Montgomery will respond to drought operations of the APC projects upstream.

7-11. Flood Emergency Action Plan. APC maintains the Flood Emergency Action Plan for the H. Neely Henry Project. The plan was developed and is updated in accordance with FERC guidelines. APC is responsible for notifying the appropriate agencies/organizations in the unlikely event of an emergency at the H. Neely Henry Dam. The Flood Emergency Action Plan is updated at least once a year, with a full reprint every five years. Inundation maps, developed by APC and updated as necessary, are also provided in the H. Neely Henry Project Flood Emergency Action Plan.

7-12. Rate of Release Change. Gradual changes are important when releases are being decreased and downstream conditions are very wet, resulting in saturated riverbank conditions. The Corps acknowledges that a significant reduction in basin releases over a short period can result in some bank sloughing, and release changes are scheduled accordingly when a slower rate of change does not significantly affect downstream flood risk. Overall, the effect of basin regulation on streambank erosion has been reduced by the regulation of the basin because higher peak-runoff flows into the basin are captured and metered out more slowly.

Table 7-6 ACT Drought Management Plan

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Drought Level Response ^a	Normal Operations											
	DIL 1: Low Basin Inflows or Low Composite or Low State Line Flow											
	DIL 2: DIL 1 criteria + (Low Basin Inflows or Low Composite or Low State Line Flow)											
	DIL 3: Low Basin Inflows + Low Composite + Low State Line Flow											
Coosa River Flow ^b	Normal Operation: 2,000 cfs			4,000 (8,000)		4,000 – 2,000		Normal Operation: 2,000 cfs				
	Jordan 2,000 +/-cfs			4,000 +/- cfs		6/15 Linear Ramp down	Jordan 2,000 +/-cfs			Jordan 2,000 +/-cfs		
	Jordan 1,600 to 2,000 +/-cfs			2,500 +/- cfs		6/15 Linear Ramp down	Jordan 2,000 +/-cfs			Jordan 1,600 to 2,000 +/-cfs		
	Jordan 1,600 +/-cfs			Jordan 1,600 to 2,000 +/-cfs				Jordan 2,000 +/-cfs		Jordan 1,600 to 2,000 +/-cfs		Jordan 1,600 +/-cfs
Tallapoosa River Flow ^c	Normal Operations: 1200 cfs											
	Greater of 1/2 Yates Inflow or 2 x Heflin Gage (Thurlow Lake releases > 350 cfs)				1/2 Yates Inflow					1/2 Yates Inflow		
	Thurlow Lake 350 cfs				1/2 Yates Inflow					Thurlow Lake 350 cfs		
	Maintain 400 cfs at Montgomery WTP (Thurlow Lake release 350 cfs)						Thurlow Lake 350 cfs			Maintain 400 cfs at Montgomery WTP (Thurlow Lake release 350 cfs)		
Alabama River Flow ^d	Normal Operation: Navigation or 4,640 cfs flow											
	4,200 cfs (10% Cut) - Montgomery				4,640 cfs - Montgomery)					Reduce: Full – 4,200 cfs		
	3,700 cfs (20% Cut) - Montgomery				4,200 cfs (10% Cut) - Montgomery					Reduce: 4,200 cfs-> 3,700 cfs Montgomery (1 week ramp)		
	2,000 cfs Montgomery				3,700 cfs Montgomery			4,200 cfs (10% Cut) - Montgomery		Reduce: 4,200 cfs -> 2,000 cfs Montgomery (1 month ramp)		
Guide Curve Elevation	Normal Operations: Elevations follow Guide Curves as prescribed in License (Measured in Feet)											
	Corps Deviations: As Needed; FERC Deviation for Lake Martin											
	Corps Deviations: As Needed; FERC Deviation for Lake Martin											
	Corps Deviations: As Needed; FERC Deviation for Lake Martin											

a. Note these are base flows that will be exceeded when possible.

b. Jordan flows are based on a continuous +/- 5% of target flow.

c. Thurlow Lake flows are based on continuous +/- 5% of target flow: flows are reset on noon each Tuesday based on the prior day's daily average at Heflin or Yates.

d. Alabama River flows are 7-Day Average Flow.

8 - EFFECT OF WATER CONTROL PLAN

8-01. General. In 1954, Public Law 436 suspended the authorization for federal development of the Coosa River for the generation of electric power, in order to permit development by private interests under a license to be issued by the FPC. In December 1955, APC applied to the FPC for a license for development of the Coosa River in accordance with the provisions of Public Law 436. The FPC issued a license to APC on 4 September 1957, for the construction, operation and maintenance of Project 2146, which included the H. Neely Henry site. The H. Neely Henry Project is a peaking hydropower peaking project with operating lake elevations that range from 508 to 507 feet NGVD29.

The impacts of the ACT Master Water Control Manual and its Appendices, including this water control manual have been fully evaluated in a Feasibility Report and Integrated Supplemental Environmental Impact Statement (FR/SEIS) that was published in November 2020. A Record of Decision (ROD) for the action was signed in August 2021. During the preparation of the FR/SEIS, a review of all direct, secondary, and cumulative impacts was made. As detailed in the FR/SEIS, the decision to prepare the Water Control Manual and the potential impacts was coordinated with Federal and State agencies, environmental organizations, Native American tribes, and other stakeholder groups and individuals having an interest in the basin. The ROD and FR/SEIS are public documents and references to their accessible locations are available upon request.

8-02. Flood Risk Management. H. Neely Henry Dam contains 4.5 percent of the conservation storage in the ACT Basin. The discharge percent chance exceedance curve at the dam site for the period 1967–2009 is shown on Plate 8-1. The curve was developed from “midnight instantaneous” discharge data from the APC. The observed versus modeled routing for elevation and discharge for four floods of record, 1977, 1979, 1990, and 1995, were determined using the higher winter pool level and new flood risk management procedures shown in the Interim Flood Control Plan for H. Neely Henry Reservoir Report, dated May 1999. These curves are shown on Plates 8-2 through 8-5. In computing the effect of reservoir regulation on these four floods, it was assumed that the initial pool level was at the maximum wintertime power-pool elevation of 507.0 feet NGVD29.

Regulation of the spillway design flood is shown on Plate 8-6. The initial pool for the spillway design flood was at elevation 505.0 feet NGVD29.

The evacuation plan for H. Neely Henry Lake will provide some reduction in flood peaks at Gadsden, Alabama by lowering the water surface profile throughout the reservoir. For floods with peak inflows of 80,000 to 90,000 cfs occurring in the winter with initial pool level at elevation 507 feet NGVD29, the drawdown of the lake will affect a reduction in peak stage at Gadsden, Alabama of about 1-foot. For floods of the same magnitude occurring in the summer with initial pool level at 508 feet NGVD29, the lake drawdown will reduce the peak stage at Gadsden, Alabama by 1.5 to 2 feet. However, since the initial pool is higher in the summer, the resulting peak at Gadsden, Alabama would be slightly higher than for the same flood occurring during the winter.

Headwater and tailwater elevation-percent chance exceedance curves are shown on Plate 8-7.

8-03. Recreation. H. Neely Henry Lake is an important recreational resource, providing significant economic and social benefits for the region and the nation. The project contains 11,235 acres of water at the summer power pool elevation of 508.0 feet NGVD29. A wide variety of recreational opportunities are provided at the lake including boating, fishing, camping, picnicking, water skiing, hunting, and sightseeing. The effects of the H. Neely Henry water control operations on recreation opportunities are minimal between the maximum and minimum power pool elevations of 508 to 507 feet NGVD29.

8-04. Water Quality. The water quality conditions that are generally present in H. Neely Henry Lake are typical of water quality conditions and trends that exist in reservoirs throughout the ACT Basin that are relatively shallow with short hydraulic retention times. Water quality conditions in the main body of the lake are typically better than in the arms because of nutrient and sediment-rich, riverine inflows. Sediment and phosphorus concentrations are also highest in the upper arms and decrease toward the main pool as velocity is lowered and sediment is removed from suspension. During summertime, DO levels and water temperatures are typically highest near the top of the water column, with colder, less oxygenated water existing near the bottom. Additionally, chlorophyll a concentrations vary both seasonally and spatially and are highest from July to October during periods of low flow. Point and nonpoint sources from urban areas increase sediment and pollutant loads in the rivers immediately downstream. Reservoirs in the ACT Basin, including H. Neely Henry Lake, typically act as a sink, removing pollutant loads and sediment.

Portions of H. Neely Henry Lake and its tributaries are listed on ADEM's 2020 Integrated 305(b) and 303(d) list as impaired because nutrients and pathogens (*E. coli*). A TMDL was finalized for H. Neely Henry Lake in 2008. The lake is classified as eutrophic caused by the high levels of nutrients within the lake. DO levels in the tailwater can drop below State standards during the late summertime period.

8-05. Fish and Wildlife. The Coosa River consists of 255 river miles between its beginning at the confluence of the Etowah and Oostanaula Rivers to its confluence with the Tallapoosa River forming the Alabama River. Of these 255 river miles, 238 miles are impounded through a series of six APC dams. These six impoundments have a total of 81,300 acres of water. The H. Neely Henry Lake comprises 78 of the 238 lake impounded river miles (33 percent) and 11,235 of the 81,300 acres of water (14 percent) within the Coosa River Basin. There are 147 species of fish, 53 species of freshwater mussels, and 91 species of aquatic snails within the Coosa River Basin.

Operational flow changes affect habitat for reservoir fisheries and other aquatic resources mainly through changes in water levels, changes in reservoir flushing rates (retention times), and associated changes in water quality parameters, such as primary productivity, nutrient loading, dissolved oxygen concentrations, and vertical stratification. Seasonal water level fluctuations can substantially influence littoral (shallow-water) habitats, decreasing woody debris deposition, restricting access to backwaters and wetlands, and limiting seed banks and stable water levels necessary for native aquatic vegetation. Those limitations, in turn, significantly influence the reproductive success of resident fish populations. High water levels inundating shoreline vegetation during spawning periods frequently have been associated with enhanced reproductive success and strong year class development for largemouth bass, spotted bass, bluegill, crappie, and other littoral species. Conversely, low or declining water levels can adversely affect reproductive success by reducing the area of available littoral spawning and rearing habitats.

In reservoirs like H. Neely Henry with relatively stable water levels and short hydraulic retention, longer post-winter retention is associated with greater crappie production, possibly related to reduced flushing of young-of-year fish in the discharge from the impoundment and more stable feeding conditions.

8-06. Hydroelectric Power. The H. Neely Henry Dam hydropower Project, along with 13 other hydroelectric facilities throughout the State of Alabama, provides approximately 6 percent of the APC's power generation. The State of Alabama depends on these facilities as a source of dependable and stable electricity. Hydroelectric power is also one of the cheaper forms of electrical energy, and it can be generated and supplied quickly as needed in response to changing demand.

Hydropower is typically produced as peak energy at H. Neely Henry Dam, i.e., power is generated during the hours that the demand for electrical power is highest, causing significant variations in downstream flows. Daily hydropower releases from the dam vary from zero during off-peak periods to as much as 26,700 cfs, which is approximately turbine capacity. Often, the weekend releases are lower than those during the weekdays. Lake elevations can vary on average about 0.65 feet during a 24-hour period as a result of hydropower releases. Tailwater levels can also vary significantly daily because of peaking hydropower operations at H. Neely Henry Dam, characterized by a rapid rise in downstream water levels immediately after generation is initiated and a rapid fall in stage as generation is ceased. Except during high flow conditions when hydropower may be generated for more extended periods of time, this peaking power generation scenario with daily fluctuating stages downstream is repeated nearly every weekday (not generally on weekends). The project generates an estimated 210,935 megawatt hours of energy annually.

Hydropower generation by the H. Neely Henry Dam Hydropower Plant, in combination with the other hydropower power projects in the ACT Basin, helps to provide direct benefits to a large segment of the basin's population in the form of dependable, stable, and relatively low cost power. Hydropower plays an important role in meeting the electrical power demands of the region.

8-07. Navigation. APC releases water from H. Neely Henry Project in conjunction with their other storage projects in the ACT Basin to provide flows to support navigation. The navigation plan provides the flexibility to support flow targets when the system experiences normal flow conditions, reduced support as basin hydrology trends to drier conditions, and suspension of navigation support during sustained low flow conditions.

8-08. Drought Contingency Plans. The importance of drought contingency plans has become increasingly obvious as more demands are placed on the water resources of the basin. During low flow conditions, the reservoirs within the basin may not be able to fully support all project purposes. Several drought periods have occurred since construction of the H. Neely Henry Project in 1966. The duration of low flows can be seasonal or they can last for several years. Some of the more extreme droughts occurred in the early and mid-1980s, and most of the time period between late-1998 to mid-2009. There were periods of high flows during these droughts but the lower than normal rainfall trend continued.

The purpose of drought planning is to minimize the effect of drought, to develop methods for identifying drought conditions, and to develop both long- and short-term measures to be used to respond to and mitigate the effects of drought conditions. During droughts, reservoir regulation techniques are planned to preserve and ensure the more critical needs.

For the H. Neely Henry Project, the APC and the Corps will coordinate water management activities during the drought with other private power companies and federal agencies, navigation interests, the states, and other interested state and local parties as necessary. Drought operations will be in accordance with Table 7-6, ACT Drought Management Plan.

8-09. Flood Emergency Action Plans. Normally, all flood risk management operations are directed by APC Reservoir Management following the flood risk management procedures outlined in this manual with data sharing and communication between APC and the Water Management Section of the Corps. If, however, a storm of flood-producing magnitude occurs and all communications are disrupted between APC and the Corps, flood risk management measures, as previously described in Chapter 7 of this appendix, will begin and/or continue.

The H. Neely Henry Dam is well maintained and has not experienced unusual events or problems. Discharges from the dam are released into the Logan Martin pool immediately downstream. The upper reaches of Logan Martin Lake are generally confined to the original river channel with some small backwater areas. The area is largely undeveloped rural and agricultural land. Most permanent buildings are in the lower reach of Logan Martin Lake. Dam failure at H. Neely Henry would pose little impact to roads and highways immediately downstream, with the exception of Highway 77 in the Ohatchee, Alabama area. Much of the area that would be impacted by dam failure is periodically flooded by high water and there is little development in these areas. Below Riverside, Alabama, substantial development has occurred, and the impacts of flooding would be great.

An emergency contact information list is shown in Exhibit G.

9 - WATER CONTROL MANAGEMENT

9-01. Responsibilities and Organization. Many agencies in federal and state governments are responsible for developing and monitoring water resources in the ACT Basin. Some of the federal agencies are the Corps, U.S. Environmental Protection Agency, USGS, National Parks Service, U.S. Coast Guard, U.S. Department of Energy, U.S. Department of Agriculture, U.S. Fish and Wildlife Service (USFWS), and NOAA. In addition to the federal agencies, each state has agencies involved: Georgia Environmental Protection Department (GAEPD), Coosa-North Georgia Regional Water Planning Council, and ADEM's Alabama Office of Water Resources. APC, as a non-federal hydro developer, also has major responsibilities through FERC licenses.

a. APC. The H. Neely Henry Project was constructed and is operated by the APC. Day-to-day operation of the project is assigned to the APC's Alabama Control Center Hydro Desk in Birmingham, Alabama, as part of the Transmission Department under the direction of Reservoir Operations Supervisor. Long-range water planning and flood risk management operation is assigned to APC Reservoir Management in Birmingham, Alabama, as part of Southern Company Services Hydro Services, under the direction of the Reservoir Management Supervisor.

b. USACE. Authority for water control regulation of federal projects in the ACT Basin has been delegated to the SAD Commander. The responsibility for water control regulation activities has been entrusted to the Mobile District, Engineering Division, Water Management Section. Water control actions for federal projects are regulated to meet the authorized project purposes in coordination with federally authorized ACT Basin-wide System purposes and public law. It is the responsibility of the Water Management Section to coordinate with APC to develop Coosa River project water control regulation procedures for flood risk management and navigation. The Water Management Section monitors the Coosa River projects for compliance with the approved water control plans and agreements. The Water Management Section will perform the following specific duties in connection with the operation of the H. Neely Henry Project:

- 1) Maintain liaison with personnel of APC Reservoir Management for the daily exchange of hydrologic data.
- 2) Maintain records of rainfall and river stages for the Coosa River Basin, and records of pool level and outflow at H. Neely Henry Dam and other impoundments in the basin.
- 3) Monitor operations of the power plant and spillway at H. Neely Henry Dam for compliance with the regulation schedule for flood risk management operations, Plate 7-2.
- 4) Transmit to APC Reservoir Management any instructions for special operations which may be required due to unusual flood conditions (except in emergencies where time does not permit, these instructions will first be cleared with the Chief of Hydrology and Hydraulics Branch and the Chief of Engineering Division).
- 5) Evaluate special water control plan deviation requests submitted by APC Reservoir Management and provide approval or disapproval.

c. Other Federal Agencies. Other federal agencies work closely with APC and the Corps to provide their agency support for the various project purposes of H. Neely Henry and to meet the federal requirements for which they might be responsible. The responsibilities and interagency coordination between the Corps and the federal agencies are discussed in Paragraph 9-02.

d. State and County Agencies

1) The Alabama Office of Water Resources (OWR) administers programs for river basin management, river assessment, water supply assistance, water conservation, flood mapping, the National Flood Insurance Program, and water resources development. Further, OWR serves as the state liaison with federal agencies on major water resources related projects, conducts any special studies on instream flow needs, and administers environmental education and outreach programs to increase awareness of Alabama's water resources.

2) ADEM's Drinking Water Branch works closely with the more than 700 water systems in Alabama that provide safe drinking water to four million citizens.

3) The Alabama Chapter of the Soil and Water Conservation Society fosters the science and the art of soil, water, and related natural resource management to achieve sustainability.

e. Stakeholders. Many non-federal stakeholder interest groups are active in the ACT Basin. The groups include lake associations, M&I water users, navigation interests, environmental organizations, and other basin-wide interest groups. Coordinating water management activities with the interest groups, State and Federal agencies, and others is accomplished as required on an ad-hoc basis and on regularly scheduled water management teleconferences when needed to share information regarding water control regulation actions and gather stakeholder feedback.

9-02. Interagency Coordination.

a. Local Press and Corps Bulletins. The local press includes any periodic publications in or near the H. Neely Henry watershed and the ACT Basin. Montgomery, Alabama has some of the largest daily papers. These papers often publish articles related to the rivers and streams. Their representatives have direct contact with the Corps and APC through their respective Public Affairs offices. In addition, the local press and the public can access current project information on the Corps and APC web pages.

b. NWS. NWS is the federal agency in NOAA that is responsible for weather and weather forecasts. The NWS along with its River Forecast Center maintains a network of reporting stations throughout the nation. It continuously provides current weather conditions and forecasts. It prepares river forecasts for many locations including the ACT Basin. Often, it prepares predictions on the basis of what if scenarios. Those include rainfall that is possible but has not occurred. In addition, the NWS provides information on hurricane tracts and other severe weather conditions. It monitors drought conditions and provides the information. Information is available through the Internet, the news, and the Mobile District's direct access.

c. USGS. The USGS is an unbiased, multidisciplinary science organization that focuses on biology, geography, geology, geospatial information, and water. The agency is responsible for the timely, relevant, and impartial study of the landscape, natural resources, and natural hazards. Through the APC-USGS partnership and the Corps-USGS Cooperative Gaging Program, the USGS maintains a comprehensive network of gages in the ACT Basin. The USGS Water Science Centers in Georgia and Alabama publish real-time reservoir levels, river and tributary stages, and flow data through the USGS National Water Information Service (NWIS) website.

d. USFWS. The USFWS is an agency of the Department of the Interior whose mission is working with others to conserve, protect and enhance fish, wildlife, plants, and their habitats for the continuing benefit of the American people. The USFWS is the responsible agency for the protection of federally listed threatened and endangered species and federally designated

critical habitat in accordance with the Endangered Species Act of 1973. The USFWS also coordinates with other federal agencies under the auspices of the Fish and Wildlife Coordination Act. APC and the Corps, Mobile District, with support from the Water Management Section, coordinate water control actions and management with USFWS in accordance with both laws.

9-03. Interagency Agreements. Refer to the Master Manual for discussion of interagency agreements for the ACT basin projects.

9-04. Commissions, River Authorities, Compacts, and Committees. Refer to the Master Manual for discussion of these subjects.

9-05. Non-Federal Hydropower. Refer to the Master Manual for discussion of non-federal hydropower in the ACT basin.

9-06. Reports.

a. As early as possible every day (preferably between 4:00 and 6:00 a.m.) and at other times upon request, the Project Operator operating agency shall provide to the CESAM Water Management Section the Operational Data Requirements. Data shall be distributed via automatic electronic transmittal. The operational data may include midnight pool elevation, 24-hour average inflow and discharge, 4-hour (midnight to 4:00 a.m.) inflow and discharge, 4:00 a.m. pool elevation, gross and estimated generation.

b. An After-Action Report will be generated after each flood event. These reports will be archived, utilized to provide narrative for annual flood damage reports, and made available upon request to SAD.

c. Automated reports are generated daily/weekly/monthly and made available through our server; ACT Basin Daily Report, ACT 10-day Forecast, River Bulletin, ACT-ACT Report Summary, Lake Level 4-Week Forecast and Average Daily Inflow to Lakes by Month.

d. The District River System Status – Weekly summary of activities on the Mobile District river systems is updated weekly and published to the webpage.

e. The hourly power generation schedule is generated and posted to by 4:00 p.m. CT. Available for viewing are tomorrow's schedule, plus the previous 5 days.

f. Any Corps-requested information, such as monthly charts, short-term hydrologic reports, emergency regulation reports, graphical and tabular summaries, and flood situation reports, shall be provided in a timely manner.

9-07. Framework for Water Management Changes. Special interest groups often request modifications of the basin water control plan or project specific water control plan. The H. Neely Henry Project and other ACT Basin projects were constructed to meet specific, authorized purposes, and major changes in the water control plans would require modifying, either the project itself or the purposes for which the projects were built. However, continued increases in the use of water resources demand constant monitoring and evaluating reservoir regulations and reservoir systems to ensure their most efficient use. Within the constraints of the FERC regulating license for the H. Neely Henry Project, Congressional authorizations, and engineering regulations, the water control plan and operating techniques are often reviewed to see if improvements are possible without violating authorized project functions. When deemed appropriate, temporary deviations to the water control plan approved by FERC and the Corps can be implemented to provide the most efficient regulation while balancing the multiple purposes of the ACT Basin-wide System.

Intentionally left blank.

EXHIBIT A

SUPPLEMENTARY PERTINENT DATA

EXHIBIT A

SUPPLEMENTARY PERTINENT DATA

EXHIBIT A SUPPLEMENTARY PERTINENT DATA

GENERAL INFORMATION

FERC License Number	2146-111
License Issued (initial 4 Sep 1957)	(reissued) 20 June 2013
License Expiration Date	20 June 2043
Licensed Capacity, kw	72,900
Project Location	Near Town of Ohatchee; Counties of Cherokee, Etowah, Calhoun and St. Clair; Coosa River 507 river miles above Mobile
Total Area Encompassed by Existing Project Boundary (land and water), acres	12,941
Acres of Water within Existing Project Boundary	11,235
Acres of Mainland within Existing Project Boundary	1,706
Henry Dam Drainage Basin, square miles	6,596
Length of River from Henry Dam to Weiss Dam, miles	78
Length of River from Henry Dam to Logan Martin Dam, miles	48.5

DAM

Date of Construction	August 1, 1962
In-service Date	June 2, 1966
Construction Type	Gravity concrete and earth-fill
Elevation Top of Abutments, NGVD29	539
Gross Head at Normal Pool Elevation (508 NGVD29), feet	43
Spillway Elevation (to top of gates), NGVD29	509
Total Length of Water Retaining Structures, feet	4,908
Length of non-overflow sections, feet	Right 133; Left 120
Length of embankments feet	Right 3,200; Left 850
Length of Powerhouse (substructure), feet	300
Length of concrete spillway, feet	305
Length of Spillway (gated), feet	240
Gates: Spillway Gates	6 total

Width by Height, feet	40 x 29
Hazard Classification	High
Spillway Capacity at 532.5 ft NGVD29, cfs	317,100

RESERVOIR - HENRY LAKE

Length of Impoundment, mile	78
Pool Elevations: Normal, feet NGVD29	508
Gross Storage:	
Normal Pool @ Elev 508 ft, acre-feet	120,853
Minimum Pool @ Elev 507 ft, acre-feet	109,999
Usable Storage Capacity (between 508 & 480 NGVD), acre-feet	Approximately 119,000
Surface Area (at NGVD29), acres	11,235
Miles Shoreline (including tributaries) at 508 NGVD29	339
Water Residence Time, days	5.8
Water Temperature Range, °Fahrenheit:	Maximum 82 Aug; Minimum 40 Jan-Feb
Existing Classification	PWS/F/S
Length of Impoundment, mile	78

POWERHOUSE

Length (Superstructure), feet	300
Width (Superstructure), feet	170
Height, feet	105
Construction Type (Superstructure)	Concrete
Draft Tube Invert Elevation, feet NGVD29	408.0
Operating Floor Elevation, feet NGVD29	494.9
Normal Tailwater Elevation, feet NGVD29	between 460.0 & 468.0
High Tailwater Elevation (three units generating), feet NGVD29	471.3
Discharge Capacity, cfs	26,700
Intake Invert Elevation, feet NGVD29	- Approximately 450
Outdoor Gantry Crane Capacity, tons	140

TURBINES (3)

Rated Net Head (Gross Static), feet	43
Manufacturer	Newport News
Type	Propeller
Rated Discharge Capacity: Maximum, cfs	8,900 each
Speed, rpm	81.8
Rated Output at 35 ft head, hp	33,500 each

GENERATORS (3)

Manufacturer	General Electric
Nameplate Rating, kw	24,300 each
Rated Output, kVA	27,000
Power Factor	0.9
Voltage, volts	11,500
Number of Phases	3
Frequency	60 cycle
Estimated average annual generation, kilowatt-hour (kW-h)	210,935,000

TRANSFORMERS

Voltage, volts	11,500
Number of Phases	3
Frequency	60 cycle
Estimated average annual generation, kW-h	210,935,000

TRANSFORMERS

Transmission Voltage	
Low side, volts	11,500
High side, volts	115,000
Rating, kilovolt amp	90,000

FLOOD FLOWS – HENRY DAM

Probable Maximum Flood

Inflow, cfs	356,200
Outflow, cfs	317,100
Maximum Elevation, feet NGVD29	532.51
Top of Embankment and Spillway, feet NGVD29	539.0

Intentionally left blank.

EXHIBIT B
UNIT CONVERSIONS

AREA CONVERSION

UNIT	m ²	km ²	ha	in ²	ft ²	yd ²	mi ²	ac
1 m ²	1	10 ⁻⁶	10 ⁻⁴	1550	10.76	1.196	3.86 X 10 ⁻⁷	2.47 X 10 ⁻⁴
1 km ²	10 ⁶	1	100	1.55 X 10 ⁹	1.076 X 10 ⁷	1.196 X 10 ⁶	0.3861	247.1
1 ha	10 ⁴	0.01	1	1.55 X 10 ⁷	1.076 X 10 ⁷	1.196 X 10 ⁴	3.86 X 10 ⁻³	2,471
1 in ²	6.45 X 10 ⁻⁴	6.45 X 10 ⁻¹⁰	6.45 X 10 ⁻⁸	1	6.94 X 10 ⁻³	7.7 X 10 ⁻⁴	2.49 X 10 ⁻¹⁰	1.57 X 10 ⁷
1 ft ²	.0929	9.29 X 10 ⁻⁸	9.29 X 10 ⁻⁶	144	1	0.111	3.59 X 10 ⁻⁸	2.3 X 10 ⁻⁵
1 yd ²	0.8361	8.36 X 10 ⁻⁷	8.36 X 10 ⁻⁵	1296	9	1	3.23 X 10 ⁻⁷	2.07 X 10 ⁻⁴
1 mi ²	2.59 X 10 ⁶	2.59	259	4.01 X 10 ⁹	2.79 X 10 ⁷	3.098 X 10 ⁶	1	640
1 ac	4047	0.004047	0.4047	6.27 X 10 ⁶	43560	1.56 X 10 ⁻³	4840	1

LENGTH CONVERSION

UNIT	cm	m	km	in.	ft	yd	Mi
Cm	1	0.01	0.00001	0.3937	0.0328	0.0109	6.21 X 10 ⁻⁶
M	100	1	0.001	39.37	3.281	1.094	6.21 X 10 ⁻⁴
Km	10 ⁵	1000	1	39,370	3281	1093.6	0.621
in.	2.54	0.0254	2.54 X 10 ⁻⁵	1	0.0833	0.0278	1.58 X 10 ⁻⁵
Ft	30.48	0.3048	3.05 X 10 ⁻⁴	12	1	0.33	
Yd	91.44	0.9144	9.14 X 10 ⁻⁴	36	3	1	
Mi	1.01 X 10 ⁵	1.61 X 10	1.6093	63,360	5280	1760	1

FLOW CONVERSION

UNIT	m ³ /s	m ³ /day	l/s	ft ³ /s	ft ³ /day	ac-ft/day	gal/min	gal/day	Mgd
m ³ /s	1	86,400	1000	35.31	3.05 X 10 ⁶	70.05	1.58 X 10 ⁴	2.28 X 10 ⁷	22.824
m ³ /day	1.16 X 10 ⁻⁵	1	0.0116	4.09 X 10 ⁻⁴	35.31	8.1 X 10 ⁻⁴	0.1835	264.17	2.64 X 10 ⁻⁴
l/s	0.001	86.4	1	0.0353	3051.2	0.070	15.85	2.28 X 10 ⁴	2.28 X 10 ⁻²
ft ³ /s	0.0283	2446.6	28.32	1	8.64 X 10 ⁴	1.984	448.8	6.46 X 10 ⁵	0.646
ft ³ /day	3.28 X 10 ⁻⁷	1233.5	3.28 X 10 ⁻⁴	1.16 X 10 ⁻⁵	1	2.3 X 10 ⁻⁵	5.19 X 10 ⁻³	7.48	7.48 X 10 ⁻⁶
ac-ft/day	0.0143	5.451	14.276	0.5042	43,560	1	226.28	3.26 X 10 ⁵	0.3258
gal/min	6.3 X 10 ⁻⁵	0.00379	0.0631	2.23 X 10 ⁻³	192.5	4.42 X 10 ⁻³	1	1440	1.44 X 10 ⁻³
gal/day	4.3 X 10 ⁻⁸	3785	4.38 X 10 ⁻⁴	1.55 X 10 ⁻⁶	11,337	3.07 X 10 ⁻⁶	6.94 X 10 ⁻⁴	1	10 ⁻⁶
Mgd	0.0438		43.82	1.55	1.34 X 10 ⁵	3.07	694	10 ⁶	1

VOLUME CONVERSION

UNIT	liters	m ³	in ³	ft ³	gal	ac-ft	million gal
Liters	1	0.001	61.02	0.0353	0.264	8.1 X 10 ⁻⁷	2.64 X 10 ⁻⁷
m ³	1000	1	61,023	35.31	264.17	8.1 X 10 ⁻⁴	2.64 X 10 ⁻⁴
in ³	1.64 X 10 ⁻²	1.64 X 10 ⁻⁵	1	5.79 X 10 ⁻⁴	4.33 X 10 ⁻³	1.218 X 10 ⁻⁸	4.33 X 10 ⁻⁹
ft ³	28.317	0.02832	1728	1	7.48	2.296 X 10 ⁻⁵	7.48 X 10 ⁶
Gal	3.785	3.78 X 10 ⁻³	231	0.134	1	3.07 X 10 ⁻⁶	10 ⁶
ac-ft	1.23 X 10 ⁶	1233.5	75.3 X 10 ⁶	43,560	3.26 X 10 ⁵	1	0.3260
million gallons	3.785 X 10 ⁶	3785	2.31 X 10 ⁸	1.34 X 10 ⁵	10 ⁶	3.0684	1

COMMON CONVERSIONS

1 million gallons per day (mgd) = 1.55 cfs

1 day-second-ft (DSF) = 1.984 acre-ft = 1 cfs for 24 hours

1 cubic foot per second of water falling 8.81 feet = 1 horsepower

1 cubic foot per second of water falling 11.0 feet at 80% efficiency = 1 horsepower

1 inch of depth over one square mile = 2,323,200 cubic feet

1 inch of depth over one square mile = 0.0737 cubic feet per second for one year.

Intentionally left blank.

EXHIBIT C

MEMORANDUM OF UNDERSTANDING WITH ATTACHMENT

BETWEEN CORPS OF ENGINEERS AND

ALABAMA POWER COMPANY

Intentionally left blank.

EXHIBIT D

PUBLIC LAW 436 83RD CONGRESS, 2ND SESSION

Public Law 436 - 83d Congress
Chapter 408 - 2d Session
H. R. 8923
AN ACT

To provide for the development of the Coosa River, Alabama and Georgia

Be it enacted by the Senate and House of Representatives of the United States of America in Congress assembled, That in connection with the comprehensive program for the development of the water resources of the Alabama-Coosa River and tributaries, authorized by the Rivers and Harbors Act, approved March 2, 1945 (59 Stat. 10), it is hereby declared to be the policy of the Congress, where private interests are considering applying for authority to undertake the development of resources covered by such authorization, that the power from such development shall be considered primarily for the benefit of the people of the section as a whole and shall be sold to assure the widest possible use, particularly by domestic and rural consumers, and at the lowest possible cost.

Sec. 2. The authorization of the comprehensive plan for the Alabama-Coosa River and tributaries, as provided in the Rivers and Harbors Act, approved March 2, 1945, insofar as it provides for the development of the Coosa River for the development of electric power, is hereby suspended to permit the development of the Coosa River, Alabama and Georgia, by a series of dams in accordance with the conditions of a license, if issued, pursuant to the Federal Power Act and in accordance with the provisions and requirements of this Act.

Sec. 3. The series of dams, together with the existing hydroelectric power dams on the Coosa River, shall, in the judgment of the Federal Power Commission, be best adapted to the comprehensive plan for the development of the Coosa River for the use or benefit of interstate commerce, for the improvement and utilization of waterpower development, and for other beneficial public uses, including recreational purposes.

Sec 4. The dams constructed by the licensee shall provide a substantially continuous series of pools and shall include basic provisions for the future economical construction of navigation facilities.

Sec. 5. The license relating to such development shall require the maximum flood control storage which is economically feasible with respect to past floods. of record but in no event shall flood control storage be less than that required to compensate for the effects of valley storage displaced by the proposed reservoirs of the licensee, or less in quantity and effectiveness than the amount of flood control storage which could feasibly be provided by the currently authorized federal multiple purpose project at Howell Mills Shoals constructed to elevation 490, with surcharge storage to elevation 495.

Sec. 6. Before a license is issued, the applicant for the license shall submit a report on the details of its plan of development to the Federal Power Commission.

Sec 7. The Chief of Engineers shall review any plan of development submitted to the Federal Power Commission for the purpose of acquiring a license and shall make recommendations with respect to such plan to such Commission with particular regard to flood control and navigation, and its adaptability to the comprehensive plan for the entire basin development.

Sec. 8. The license may provide for the construction of the series of dams in sequence on the condition that the dam or dams providing the maximum flood control benefits shall be

constructed first unless a different order of construction is approved by the Secretary of the Army.

Sec. 9. The operation and maintenance of the dams shall be subject to reasonable rules and regulations of the Secretary of the Army in the interest of flood control and navigation.

Sec. 10. An allocation of cost of flood control provided in addition to that required to compensate for displaced valley storage and of cost of navigation shall be approved by the Federal Power Commission, taking into consideration recommendations of the Chief of Engineers based upon flood control and navigation benefits estimated by the Chief of Engineers.

Sec 11. If the Federal Power Commission shall issue a license under this Act, the Commission shall simultaneously make a full report to the Public Works Committees of the Senate and House of Representatives of the Congress, setting out the major provisions and conditions inserted in such license, and a copy of the Commission's report shall forthwith be submitted to the Chief of Engineers who shall review the same and promptly submit to said committees his views as to whether the major provisions and conditions in such license are adaptable to the comprehensive plan. In the event the Congress by legislative enactment adopts a policy of compensating such licensees for navigation and flood control costs, any such allocated navigation and flood control costs are hereby authorized to be compensated through annual contributions by the United States.

Sec 12. Unless it is beyond the reasonable control of a licensee acting in good faith and exercising due diligence: (1) an application for a preliminary permit under the Federal Power Act relating to the development of the Coosa River shall be prosecuted with reasonable diligence before the Federal Power Commission; (2) an application for a license to construct such dams shall be filed with such Commission within two years after the date of the enactment of this Act; (3) construction of one such dam shall be commenced within a period of one year subsequent to the date of the issuance of a license by such Commission, (4) at least one such dam and its power plant shall be completed and in operation in accordance with the terms of the license within five years from the date of the issuance of such license by such Commission; and (5) the remaining dams included in the license issued by such Commission shall be completed within ten years from the date of the commencement of construction of the first dam, subject to the provisions of Section 13 of the Federal Power Act: "Provided," That if any such conditions are not fulfilled, or if the Commission denies the application for a license, the authorization relating to the Alabama-Coosa River provided for in the Act, approved March 2, 1945, shall have the same status as it would have had if this Act had not been enacted, so far as the uncompleted project works are concerned; in which event the outstanding license may be terminated or revoked and the uncompleted and completed project may be sold or acquired by the United States as provided in Sections 13 and 26 of the Federal Power Act.

Sec. 13. Nothing in this Act shall be deemed to affect in any way the authorization of the development of the Alabama-Coosa River and tributaries other than that portion of the development involving projects on the Coosa River or the authority of the Federal Power Commission to issue a license for the complete development of the Coosa River by States or municipalities under section 7 (a) of the Federal Power Act or to find under section 7 (b) of said Act that the development should be under taken by the United States itself.

Approved June 28, 1954

Intentionally left blank.

EXHIBIT E
EXTRACTS FROM PROJECT LICENSE

EXTRACTS FROM PROJECT LICENSE

Federal Energy Regulatory Commission Project License for major project No. 2146-111, Issued 20 June 2013, authorizes the continued operation and maintenance by the Alabama Power Company of the H. Neely Henry Project, an existing development on the Coosa River near Gadsden, Alabama. Extracts from the project license especially pertinent to flood risk management, navigation, water use and reservoir regulation concerning the H. Neely Henry Project are quoted below for guidance and reference purposes.

Article 8. The Licensee shall install and thereafter maintain gages and stream-gaging stations for the purpose of determining the stage and flow of the stream or streams on which the project is located, the amount of water held in and withdrawn from storage, and the effective head on the turbines; shall provide for the required reading of such gages and for the adequate rating of such stations; and shall install and maintain standard meters adequate for the determination of the amount of electric energy generated by the project works. The number, character, and location of gages, meters, or other measuring devices, and the method of operation thereof, shall at all times be satisfactory to the Commission or its authorized representative. The Commission reserves the right, after notice and opportunity for hearing, to require such alterations in the number, character, and location of gages, meters, or other measuring devices, and the method of operation thereof, as are necessary to secure adequate determinations. The installation of gages, the rating of said stream or streams, and the determination of the flow thereof, shall be under the supervision of, or in cooperation with, the District Engineer of the United States Geological Survey having charge of stream-gaging operations in the region of the project, and the Licensee shall advance to the United States Geological Survey the amount of funds estimated to be necessary for such supervision, or cooperation for such periods as may be mutually agreed upon. The Licensee shall keep accurate and sufficient records of the foregoing determinations to the satisfaction of the Commission and shall make return of such records annually at such time and in such form as the Commission may prescribe.”

Article 11. Whenever the Licensee is directly benefited by the construction work of another licensee, a permittee, or the United States on a storage reservoir or other headwater improvement, the Licensee shall reimburse the owner of the headwater improvement for such part of the annual charges for interest, maintenance, and depreciation thereof as the Commission shall determine to be equitable, and shall pay to the United States the cost of making such determination as fixed by the Commission. For benefits provided by a storage reservoir or other headwater improvement of the United states, the Licensee shall pay to the Commission the amounts for which it is billed from time to time for such headwater benefits and for the cost of making the determinations pursuant to the then current regulations of the Commission under the Federal Power Act.”

Article 12. The United States specifically retains and safeguards the right to use water in such amount, to be determined by the Secretary of the Army, as may be necessary for the purposes of navigation on the navigable waterway affected; and the operations of the Licensee, so far as they affect the use, storage and discharge from storage of waters affected by the license, shall at all times be controlled by such reasonable rules and regulations as the Secretary of the Army may prescribe in the interest of navigation, and as the Commission may prescribe for the protection of life, health, and property, and in the interest of the fullest practicable conservation and utilization of such waters for power purposes and for other beneficial public uses, including recreational purposes, and the Licensee shall release water from the project reservoir at such rate in cubic feet per second, or such volume in acre-feet per specified period of time, as the Secretary of the Army may prescribe in the interest of

navigation, or as the Commission may prescribe for the other purposes hereinbefore mentioned.”

Article 13. On the application of any person, association, corporation, Federal agency, State or municipality, the Licensee shall permit such reasonable use of its reservoir or other project properties, including works, lands and water rights, or parts thereof, as may be ordered by the Commission, after notice and opportunity for hearing, in the interests of comprehensive development of the waterway or waterways involved and the conservation and utilization of the water resources of the region for water supply or for the purposes of steam-electric, irrigation, industrial, municipal or similar uses. The Licensee shall receive reasonable compensation for use of its reservoir or other project properties or parts thereof for such purposes, to include at least full reimbursement for any damages or expenses which the joint use causes the Licensee to incur. Any such compensation shall be fixed by the Commission either by approval of an agreement between the Licensee and the party or parties benefiting or after notice and opportunity for hearing. Applications shall contain information in sufficient detail to afford a full understanding of the proposed use, including satisfactory evidence that the applicant possesses necessary water rights pursuant to applicable State law, or a showing of cause why such evidence cannot concurrently be submitted, and a statement as to the relationship of the proposed use to any State or municipal plans or orders which may have been adopted with respect to the use of such waters.”

Article 15. The Licensee shall, for the conservation and development of fish and wildlife resources, construct, maintain, and operate, or arrange for the construction, maintenance, and operation of such reasonable facilities, and comply with such reasonable modifications of the project structures and operation, as may be ordered by the Commission upon its own motion or upon the recommendation of the Secretary of the Interior or the fish and wildlife agency or agencies of any State in which the project or a part thereof is located, after notice and opportunity for hearing.”

Article 16. Whenever the United States shall desire, in connection with the project, to construct fish and wildlife facilities or to improve the existing fish and wildlife facilities at its own expense, the Licensee shall permit the United States or its designated agency to use, free of cost, such of the Licensee's lands and interests in lands, reservoirs, waterways and project works as may be reasonably required to complete such facilities or such improvements thereof. In addition, after notice and opportunity for hearing, the Licensee shall modify the project operation as may be reasonably prescribed by the Commission in order to permit the maintenance and operation of the fish and wildlife facilities constructed or improved by the United States under the provisions of this article. This article shall not be interpreted to place any obligation on the United States to construct or improve fish and wildlife facilities or to relieve the Licensee of any obligation under this license.”

Article 18. So far as is consistent with proper operation of the project, the Licensee shall allow the public free access, to a reasonable extent, to project waters and adjacent project lands owned by the Licensee for the purpose of full public utilization of such lands and waters for navigation and for outdoor recreational purposes, including fishing and hunting: Provided, That the Licensee may reserve from public access such portions of the project waters, adjacent lands, and project facilities as may be necessary for the protection of life, health, and property.

Article 19. In the construction, maintenance, or operation of the project, the Licensee shall be responsible for, and shall take reasonable measures to prevent, soil erosion on lands adjacent to streams or other waters, stream sedimentation, and any form of water or air

pollution. The Commission, upon request or upon its own motion, may order the Licensee to take such measures as the Commission finds to be necessary for these purposes, after notice and opportunity for hearing.”

“Article 21. Material may be dredged or excavated from, or placed as fill in, project lands and/or waters only in the prosecution of work specifically authorized under the license; in the maintenance of the project; or after obtaining Commission approval, as appropriate. Any such material shall be removed and/or deposited in such manner as to reasonably preserve the environmental values of the project and so as not to interfere with traffic on land or water. Dredging and filling in a navigable water of the United States shall also be done to the satisfaction of the District Engineer, Department of the Army, in charge of the locality.”

“Article 22. Whenever the United States shall desire to construct, complete, or improve navigation facilities in connection with the project, the Licensee shall convey to the United States, free of cost, such of its lands and rights-of-way and such rights of passage through its dams or other structures, and shall permit such control of its pools, as may be required to complete and maintain such navigation facilities.”

“Article 23. The operation of any navigation facilities which may be constructed as a part of, or in connection with, any dam or diversion structure constituting a part of the project works shall at all times be controlled by such reasonable rules and regulations in the interest of navigation, including control of the level of the pool caused by such dam or diversion structure, as may be made from time to time by the Secretary of the Army.”

“Article 24. The Licensee shall furnish power free of cost to the United States for the operation and maintenance of navigation facilities in the vicinity of the project at the voltage and frequency required by such facilities and at a point adjacent thereto, whether said facilities are constructed by the Licensee or by the United States.”

“Article 25. The Licensee shall construct, maintain, and operate at its own expense such lights and other signals for the protection of navigation as may be directed by the Secretary of the Department in which the Coast Guard is operating.”

“Article 28. The Licensee shall interpose no objection to, and shall in no way prevent, the use by the agency of the United States having jurisdiction over the lands of the United States affected, or by persons or corporations occupying lands of the United States under permit, of water for fire suppression from any stream, conduit, or body of water, natural or artificial, used by the Licensee in the operation of the project works covered by the license, or the use by said parties of water for sanitary and domestic purposes from any stream, conduit, or body of water, natural or artificial, used by the Licensee in the operation of the project works covered by the license.

EXHIBIT F

ALABAMA-COOSA-TALLAPOOSA (ACT) RIVER BASIN

DROUGHT CONTINGENCY PLAN

**DROUGHT CONTINGENCY PLAN FOR ALABAMA-COOSA-TALLAPOOSA
RIVER BASIN ALLATOONA DAM AND LAKE
CARTERS DAM AND LAKE
ALABAMA POWER COMPANY COOSA RIVER PROJECTS ALABAMA RIVER PROJECTS
ALABAMA POWER COMPANY TALLAPOOSA RIVER PROJECTS**



**US Army Corps
of Engineers®**

**U.S. Army Corps of Engineers
South Atlantic Division
Mobile District**

April 2022

**DROUGHT CONTINGENCY PLAN
FOR THE
ALABAMA-COOSA-TALLAPOOSA RIVER BASIN**

I – INTRODUCTION

1-01. Purpose of Document. The purpose of this Drought Contingency Plan (DCP) is to provide a basic reference for water management decisions and responses to water shortage in the Alabama-Coosa-Tallapoosa (ACT) River Basin induced by climatological droughts. As a water management document, it is limited to those drought concerns relating to water control management actions for federal U.S. Army Corps of Engineers (Corps) and Alabama Power Company (APC) dams. This DCP does not prescribe all possible actions that might be taken in a drought situation due to the long-term nature of droughts and unique issues that may arise. The primary value of this DCP is in documenting the overall ACT Basin Drought Management Plan for the system of Corps and APC projects; in documenting the data needed to support water management decisions related to drought regulation; and in defining the coordination needed to manage the ACT project's water resources to ensure that they are used in a manner consistent with the needs which develop during a drought. This DCP addresses the water control regulation of the five Corps impoundments and the APC Coosa and Tallapoosa projects (Table 1) in regard to water control regulation during droughts. Details of the drought management plan as it relates to each project and its water control regulation during droughts are provided in the water control manual within the respective project appendix to the ACT Basin Master Water Control Manual.

II – AUTHORITIES

2-01. Authorities. The following list provides the policies and guidance that are pertinent to the development of drought contingency plans and actions directed therein.

A. ER 1110-2-1941, "Drought Contingency Plans", dated 15 Sep 1981. This regulation provides policy and guidance for the preparation of drought contingency plans as part of the Corps of Engineers' overall water management activities.

B. ER 1110-2-8156, "Preparation of Water Control Manuals", dated 31 Aug 1995. This document provides a guide for preparing water control manuals for individual water resource projects and for overall river basins to include drought contingency plans.

C. ER 1110-2-240, "Water Control Management", dated 8 Oct 1982. This regulation prescribes the policies and procedures to be followed in water management activities including special regulations to be conducted during droughts. It also sets the responsibility and approval authority in development of water control plans.

D. EM 1110-2-3600, "Management of Water Control Systems", dated 30 Nov 1987. This guidance memorandum requires that the drought management plan be incorporated into the project water control manuals and master water control manuals. It also provides guidance in formulating strategies for project regulation during droughts.

Table 1. Reservoir impoundments within the ACT River Basin

River/Project Name	Owner/State/Year Initially Completed	Total storage at Full Pool (acre-feet)	Conservation Storage (acre-feet)	Percentage of ACT Basin Conservation Storage (%)
<i>Coosawattee River</i>				
Carters Dam and Lake	Corps/GA/1974	383,565	141,402	5.9
Carters Reregulation Dam	Corps/GA/1974	17,380	16,571	0.1
<i>Etowah River</i>				
Allatoona Dam and Lake	Corps/GA/1949	338,253	270,247	10.3
Hickory Log Creek Dam	CCMWA/Canton/2007	17,702	NA	NA
<i>Coosa River</i>				
Weiss Dam and Lake	APC/AL/1961	306,655	263,417	10.0
H. Neely Henry Dam and Lake	APC/AL/1966	120,853	118,210	4.5
Logan Martin Dam and Lake	APC/AL/1964	273,467	144,383	5.5
Lay Dam and Lake	APC/AL/1914	262,887	92,352	3.5
Mitchell Dam and Lake	APC/AL/1923	170,783	51,577	1.9
Jordan Dam and Lake	APC/AL/1928	236,130	19,057	0.7
Walter Bouldin Dam	APC/AL/1967	236,130	NA	--
<i>Tallapoosa River</i>				
Harris Dam and Lake	APC/AL/1982	425,721	207,317	7.9
Martin Dam and Lake	APC/AL/1926	1,628,303	1,202,340	45.7
Yates Dam and Lake	APC/AL/1928	53,908	6,928	0.3
Thurlow Dam and Lake	APC/AL/1930	17,976	NA	--
<i>Alabama River</i>				
Robert F. Henry Lock and Dam/R.E. "Bob" Woodruff Lake	Corps/AL/1972	247,210	36,450	1.4
Millers Ferry Lock and Dam/William "Bill" Dannelly Lake	Corps/AL/1969	346,254	46,704	1.8
Claiborne Lock and Dam and Lake	Corps/AL/1969	102,480	NA	--

III – DROUGHT IDENTIFICATION

3-01. Definition. Drought can be defined in different ways - meteorological, hydrological, agricultural, and socioeconomic. In this DCP, the definition of drought used in the *National Study of Water Management During Drought* is used:

“Droughts are periods of time when natural or managed water systems do not provide enough water to meet established human and environmental uses because of natural shortfalls in precipitation or streamflow.”

That definition defines drought in terms of its impact on water control regulation, reservoir levels, and associated conservation storage. Water management actions during droughts are intended to balance the water use and water availability to meet water use needs. Because of hydrologic variability, there cannot be 100 percent reliability that all water demands are met. Droughts occasionally will be declared, and mitigation or emergency actions initiated to lessen

the stresses placed on the water resources within a river basin. Those responses are tactical measures to conserve the available water resources (USACE 2009).

3-02. Drought Identification There is no known method of predicting how severe or when a drought will occur. There are, however, indicators that are useful in determining when conditions are favorable: below normal rainfall; lower than average inflows; and low reservoir levels, especially immediately after the spring season when rainfall and runoff conditions are normally the highest. When conditions indicate that a drought is imminent, the Corps Water Management Section (WMS) and APC will increase the monitoring of the conditions and evaluate the impacts on reservoir projects if drought conditions continue or become worse for 30-, 60-, or 90-day periods. Additionally, WMS and APC will determine if a change in operating criteria would aid in the total regulation of the river system and if so, what changes would provide the maximum benefits from any available water.

Various products are used to detect and monitor the extent and severity of basin drought conditions. One key indicator is the U.S. Drought Monitor available through the U.S. Drought Portal, www.drought.gov. The National Weather Service (NWS) Climate Prediction Center (CPC) also develops short-term (6- to 10-day and 8- to 14-day) and long-term (1-month and 3month) precipitation and temperature outlooks and a U.S. Seasonal Drought Outlook, which are useful products for monitoring dry conditions. The Palmer Drought Severity Index is also used as a drought reference. The Palmer index assesses total moisture by using temperature and precipitation to compute water supply and demand and soil moisture. It is considered most relevant for non-irrigated cropland and primarily reflects long-term drought. However, the index requires detailed data and cannot reflect an operation of a reservoir system. The Alabama Office of the State Climatologist also produces a Lawn and Garden Moisture Index for Alabama, Florida, Georgia, and South Carolina, which gives a basin-wide ability to determine the extent and severity of drought conditions. The runoff forecasts developed for both short- and long range periods reflect drought conditions when appropriate. There is also a heavy reliance on the latest El Niño Southern Oscillation (ENSO) forecast modeling to represent the potential effects of La Niña on drought conditions and spring inflows. Long-range models are used with greater frequency during drought conditions to forecast potential effects on reservoir elevations, ability to meet minimum flows, and water supply availability. A long-term, numerical model, Extended Streamflow Prediction, developed by the NWS, provides probabilistic forecasts of streamflow and reservoir stages on the basis of climatic conditions, streamflow, and soil moisture. Extended Streamflow Prediction results are used in projecting possible future drought conditions. Other parameters and models can indicate a lack of rainfall and runoff and the degree of severity and continuance of a drought. For example, models using data of previous droughts or a percent of current to mean monthly flows with several operational schemes have proven helpful in forecasting reservoir levels for water management planning purposes. Other parameters considered during drought management are the ability of the various lakes to meet the demands placed on storage, the probability that lake elevations will return to normal seasonal levels, basin streamflows, basin groundwater table levels, and the total available storage to meet hydropower marketing system demands.

3-03. Historical Droughts Drought events have occurred in the ACT Basin with varying degrees of severity and duration. Five of the most significant historical basin wide droughts occurred in 1940-1941, 1954-1958, 1984-1989, 1999-2003, and 2006-2009. The 1984 to 1989 drought caused water shortages across the basin in 1986. This resulted in the need for the Corps to adjust water management practices. Water shortages occurred again from 1999 through 2002 and during 2007 through 2008. The 2006 to 2009 drought was the most devastating recorded in Alabama and western Georgia. Precipitation declines began in December 2005. These shortfalls continued through winter 2006-07 and spring 2007, exhibiting

the driest winter and spring in the recorded period of record. The Corps and APC had water levels that were among the lowest recorded since the impoundments were constructed. North Georgia received less than 75 percent of normal precipitation (30-year average). The drought reached peak intensity in 2007, resulting in a D-4 Exceptional Drought Intensity (the worst measured) throughout the summer of 2007.

3-04. Severity. Water shortage problems experienced during droughts are not uniform throughout the ACT River Basin. Even during normal, or average, hydrologic conditions, various portions of the basin experience water supply problems. The severity of the problems is primarily attributed to the pattern of human habitation within the basin; the source of water utilized (surface water vs. ground water); and the characteristics of the water resources available for use. During droughts, these problems can be intensified. A severe drought in the basin develops when a deficiency of rainfall occurs over a long time period and has a typical duration of 18 to 24 months. The number of months of below normal rainfall is more significant in determining the magnitude of a drought in the basin than the severity of the deficiency in specific months. However, the severity of the rainfall deficiency during the normal spring wet season has a significant impact on the ability to refill reservoirs after the fall/winter drawdown period. Another confounding factor which influences droughts in the basin is the variability of rainfall over the basin, both temporarily and spatially.

IV – BASIN AND PROJECT DESCRIPTION

4-01. Basin Description. The headwater streams of the Alabama-Coosa-Tallapoosa (ACT) River Basin rise in the Blue Ridge Mountains of Georgia and Tennessee and flow southwest, combining at Rome, Georgia, to form the Coosa River. The confluence of the Coosa and Tallapoosa Rivers in central Alabama forms the Alabama River near Wetumpka, Alabama. The Alabama River flows through Montgomery and Selma and joins with the Tombigbee River at the mouth of the ACT Basin to form the Mobile River about 45 miles above Mobile, Alabama. The Mobile River flows into Mobile Bay at an estuary of the Gulf of Mexico. The total drainage area of the ACT Basin is approximately 22,739 square miles: 17,254 square miles in Alabama; 5,385 square miles in Georgia; and 100 square miles in Tennessee. A detailed description of the ACT River Basin is provided in the ACT Master Water Control Manual, Chapter II – Basin Description and Characteristics.

4-02. Project Description. The Corps operates five projects in the ACT Basin: Allatoona Dam and Lake on the Etowah River; Carters Dam and Lake and Reregulation Dam on the Coosawattee River; and Robert F. Henry Lock and Dam, Millers Ferry Lock and Dam, and Claiborne Lock and Dam on the Alabama River. Claiborne is a lock and dam without any appreciable water storage behind it. Robert F. Henry and Millers Ferry are operated as run-of-river projects and only very limited pondage is available to support hydropower peaking and other project purposes. APC owns and operates eleven hydropower dams in the ACT Basin: seven dams on the Coosa River and four dams on the Tallapoosa River. Figure 1 depicts the percentage of conservation storage of each project in the ACT Basin. Figure 2 shows the project locations within the basin. Figure 3 provides a profile of the basin and each project.

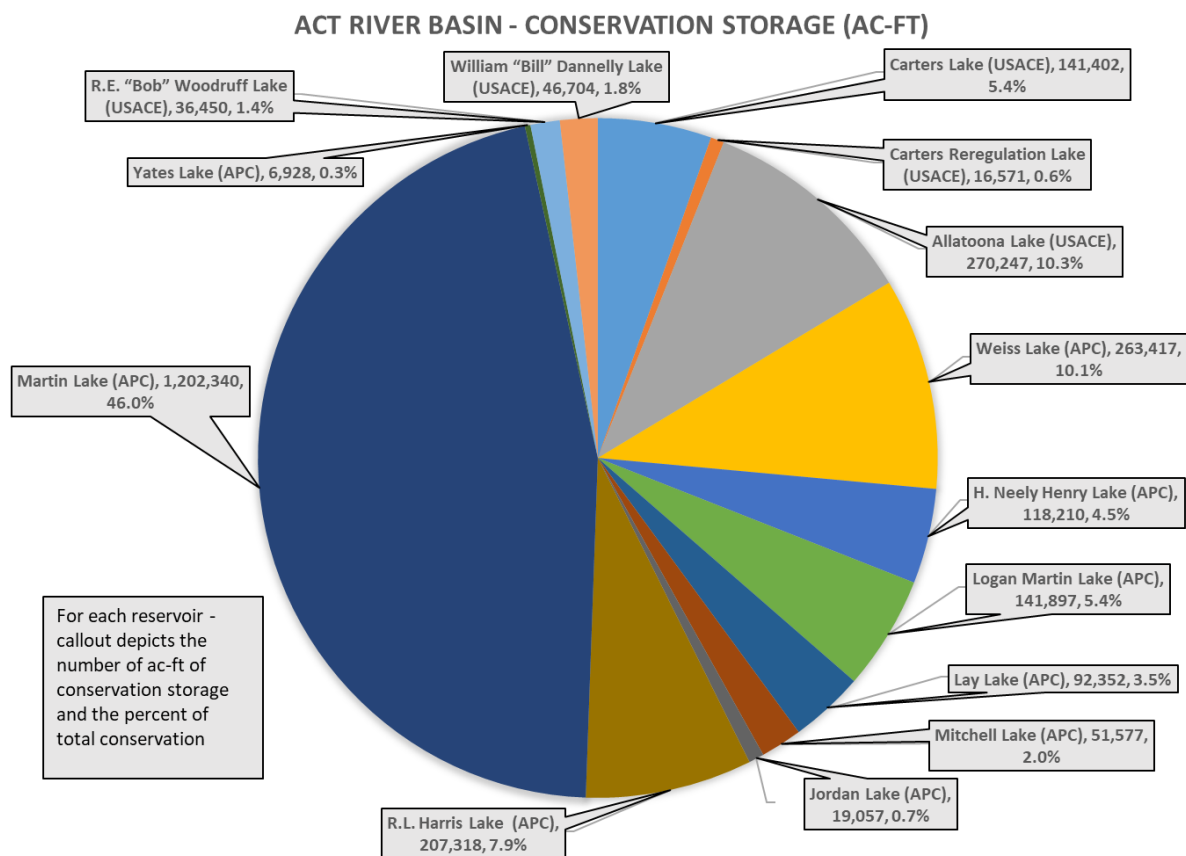


Figure 1. Alabama-Coosa-Tallapoosa River Basin Percent Conservation Storage

A. General. Of the 16 reservoirs (considering Jordan Dam and Lake and Bouldin Dam as one reservoir and Carters Lake and Carters Reregulation Dam as one reservoir), Lake Martin on the Tallapoosa River has the greatest amount of storage, containing 45.7 percent of the conservation storage in the ACT Basin. Allatoona Lake, R.L. Harris Lake, Weiss Lake, and Carters Lake are the next four largest reservoirs in terms of storage. APC controls approximately 80 percent of the available conservation storage; Corps projects (Robert F. Henry Lock and Dam, Millers Ferry Lock and Dam, Allatoona Lake, and Carters Lake) control 20 percent. The two most upstream Corps reservoirs, Allatoona Lake and Carters Lake, account for 16.8 percent of the total basin conservation storage.



Figure 2. Alabama-Coosa-Tallapoosa River Basin Project Location Map

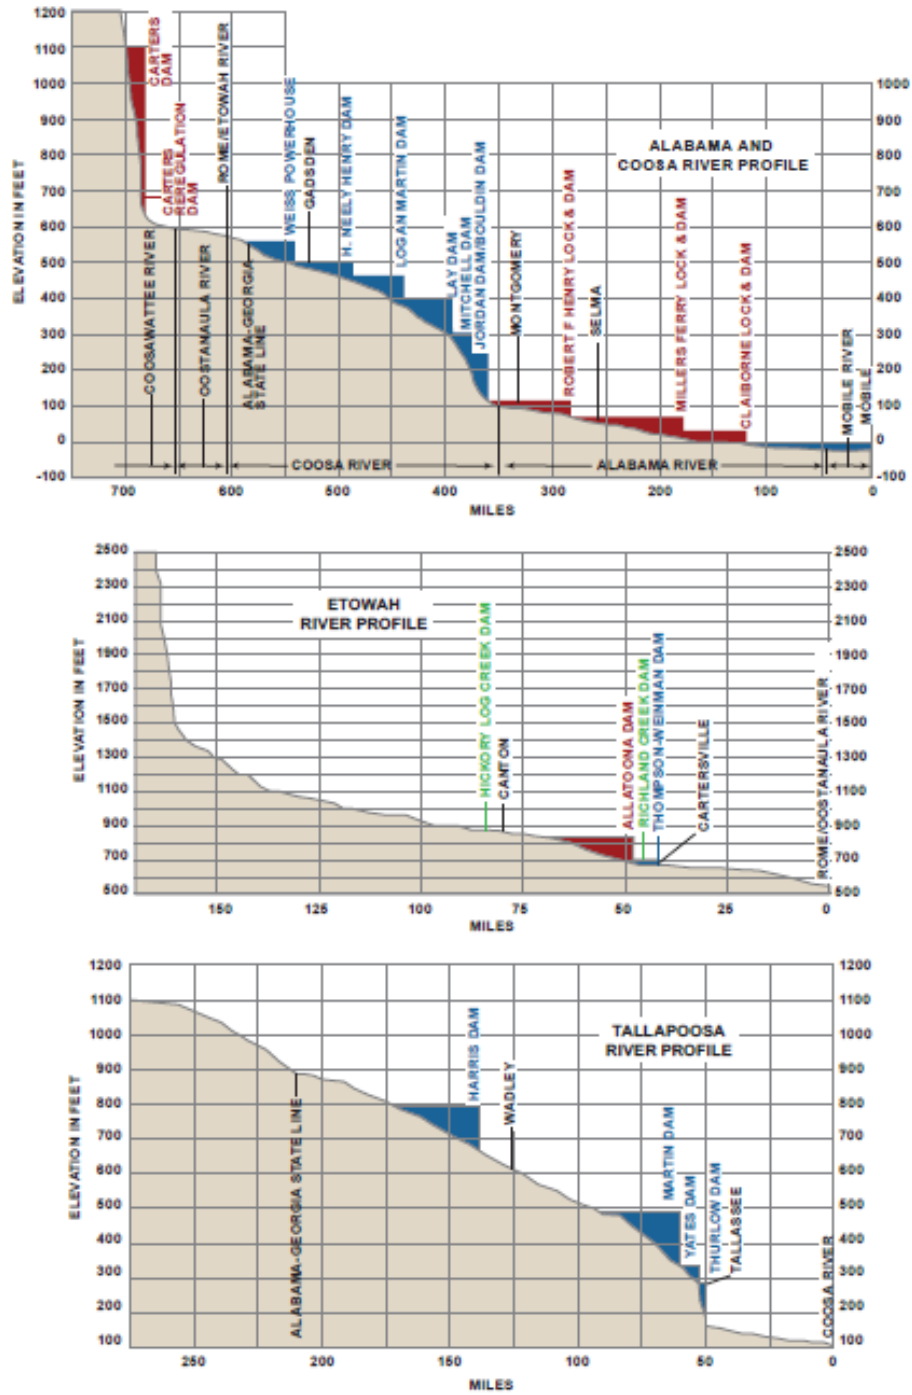


Figure 3. Alabama-Coosa-Tallapoosa River Basin Profile Map

B. Allatoona Dam and Lake. The Corps' Allatoona Dam on the Etowah River creates the 11,862 acres Allatoona Lake. The project's authorization, general features, and purposes are described in the Allatoona Dam and Lake Water Control Manual. The Allatoona Lake top of conservation pool is elevation 840 feet NGVD29 during the late spring and summer months (May through August); transitions to elevation 835 feet NGVD29 in the fall (October through mid-November); transitions to a winter drawdown to elevation 823 feet NGVD29 (1-15 January); and refills back to elevation 840 feet NGVD29 during the winter and spring wet season as shown in the water control plan guide curve (Figure 4). However, the lake level may fluctuate significantly from the guide curve over time, dependent primarily upon basin inflows but also influenced by project operations, evaporation, withdrawals, and return flows. A minimum flow of about 240 cfs is continuously released through a small unit, which generates power while providing a constant flow to the Etowah River downstream. Under drier conditions when basin inflows are reduced, project operations are adjusted to conserve storage in Allatoona Lake while continuing to meet project purposes in accordance with four action zones as shown on Figure 4.

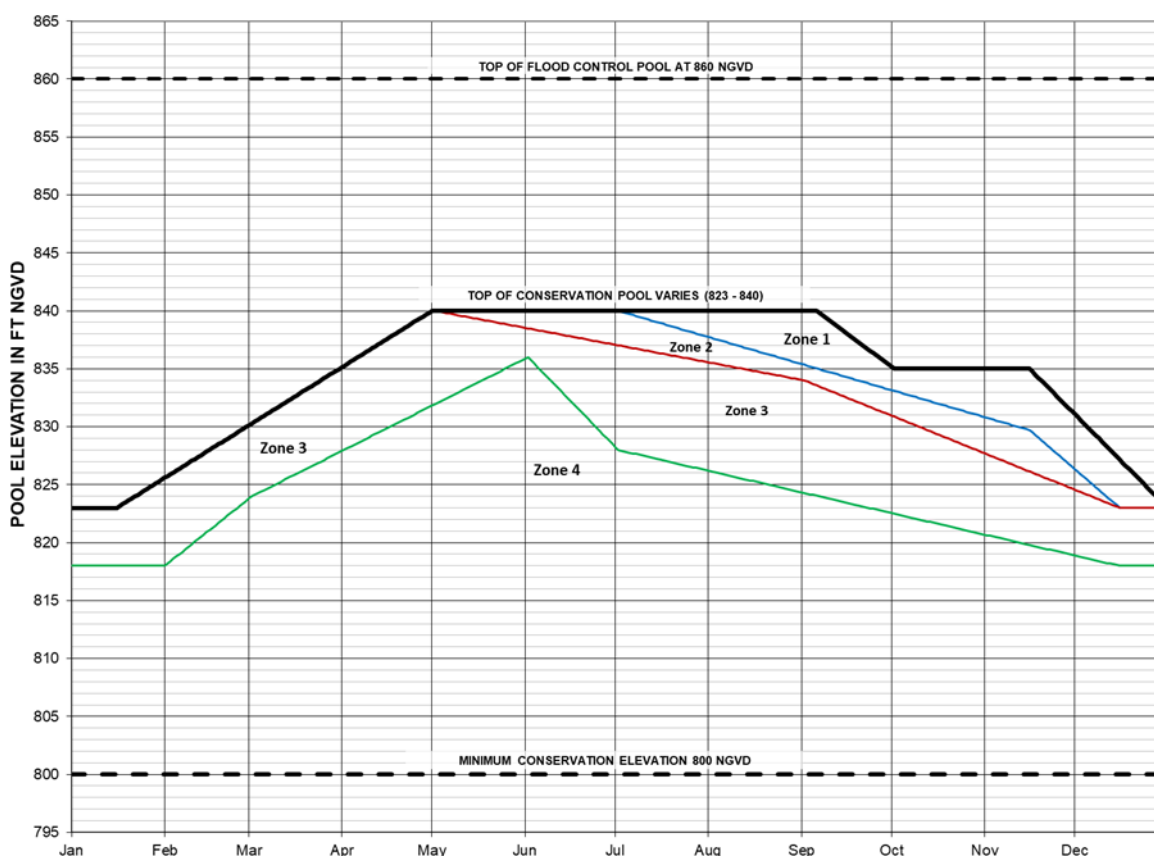


Figure 4. Allatoona Lake Guide Curve and Action Zones

C. Carters Dam and Lake and Reregulation Dam. Carters Lake is formed by Carters Dam, a Corps' reservoir on the Coosawattee River in northwest Georgia upstream of Rome, Georgia. The Carters project is a pumped-storage peaking facility that utilizes a Reregulation Dam and storage pool in conjunction with the main dam and lake. The project's authorization, general features, and purposes are described in the Carters Dam and Lake and Regulation Dam water control manual. The Carters Lake top of conservation pool is elevation 1,074 feet NGVD29 from 1 May to 1 November; transitioning to elevation 1,072 feet NGVD29 between 1

November and 1 December; remains at elevation 1,072 feet NGVD 29 from 1 December to April; then transitioning back to 1,074 feet NGVD29 between 1 April and 1 May. This is shown in the water control plan guide curve (Figure 5). As expected with a peaking/pumped storage operation, both Carters Lake and the reregulation pool experience frequent elevation changes. Typically, water levels in Carters Lake vary no more than 1 to 2 feet per day. The reregulation pool will routinely fluctuate by several feet (variable) daily as the pool receives peak hydropower discharges from Carters Lake and serves as the source for pumpback operations into Carters Lake during non-peak hours. The reregulation pool will likely reach both its normal maximum elevation of 696 feet NGVD29 and minimum elevation of 677 feet NGVD29 at least once each week. However, the general trend of the lake level may fluctuate significantly from the guide curve over time, dependent primarily upon basin inflows but also influenced by project operations and evaporation. Carters Regulation Dam provides a seasonal varying minimum release to the Coosawattee River for downstream fish and wildlife conservation. Under drier conditions when basin inflows are reduced, project operations are adjusted to conserve storage in Carters Lake while continuing to meet project purposes in accordance with action zones as shown on Figure 5. In Zone 2, Carters Regulations Dam releases are reduced to 240 cfs.

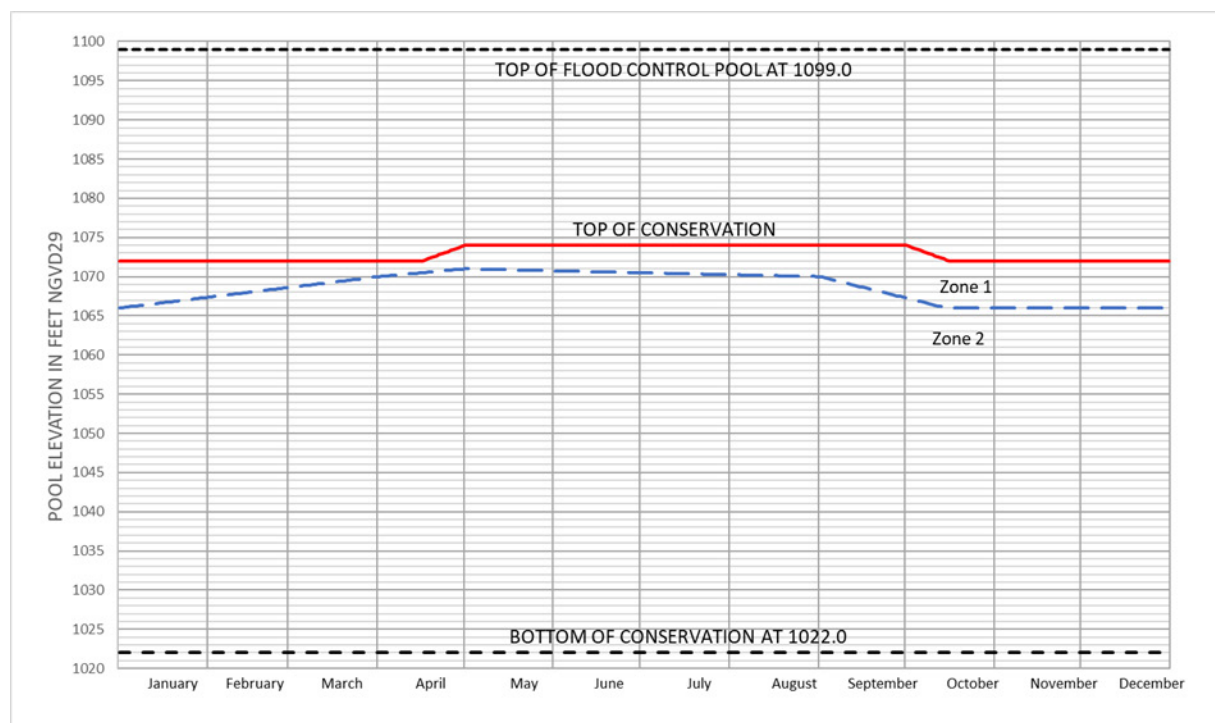


Figure 5. Carters Lake Guide Curve and Action Zones

D. APC Coosa River Projects. APC owns and operates the Coosa Hydro system of projects at Weiss Lake, H. Neely Henry Lake, Logan Martin Lake, Lay Lake, Mitchell Lake, and Jordan/Bouldin Dam and Lake on the Coosa River in the ACT Basin. APC Coosa River projects function mainly to generate electricity by hydropower. In addition, the upper three projects (Weiss, H. Neely Henry, and Logan Martin) operate pursuant to Public Law 83-436 regarding the requirement for the projects to be operated for flood risk management and navigation in accordance with reasonable rules and regulations of the Secretary of the Army. The rules and regulations are addressed in a memorandum of understanding between the Corps and APC (Exhibit B of the *Master Water Control Manual, Alabama-Coosa-Tallapoosa (ACT) River Basin*,

Alabama, Georgia), in individual water control manuals for the three projects, and in this ACT Basin DCP. The Weiss Lake is on the Coosa River in northeast Alabama, about 80 mi northeast of Birmingham, Alabama, and extends into northwest Georgia for about 13 miles upstream on the Coosa River. The dam impounds a 30,027 acres reservoir (Weiss Lake) at the normal summer elevation of 564 feet NGVD29 as depicted in the regulation guide curve shown in Figure 6 (source APC). The H. Neely Henry Lake is on the Coosa River in northeast Alabama, about 60 miles northeast of Birmingham, Alabama. The dam impounds an 11,200 acres reservoir at the normal summer elevation of 508 feet NGVD29 as depicted in the regulation guide curve shown in Figure 7 (source APC). The Logan Martin Lake is in northeast Alabama on the Coosa River, about 40 miles east of Birmingham, Alabama. The dam impounds a 15,269-acre reservoir at the normal summer elevation of 465 feet NGVD29 as depicted in the regulation guide curve shown in Figure 8 (source APC). The projects' authorizations, general features, and purposes are described in the Weiss, H. Neely Henry, and Logan Martin water control manual appendices to the ACT Basin Master Water Control Manual.

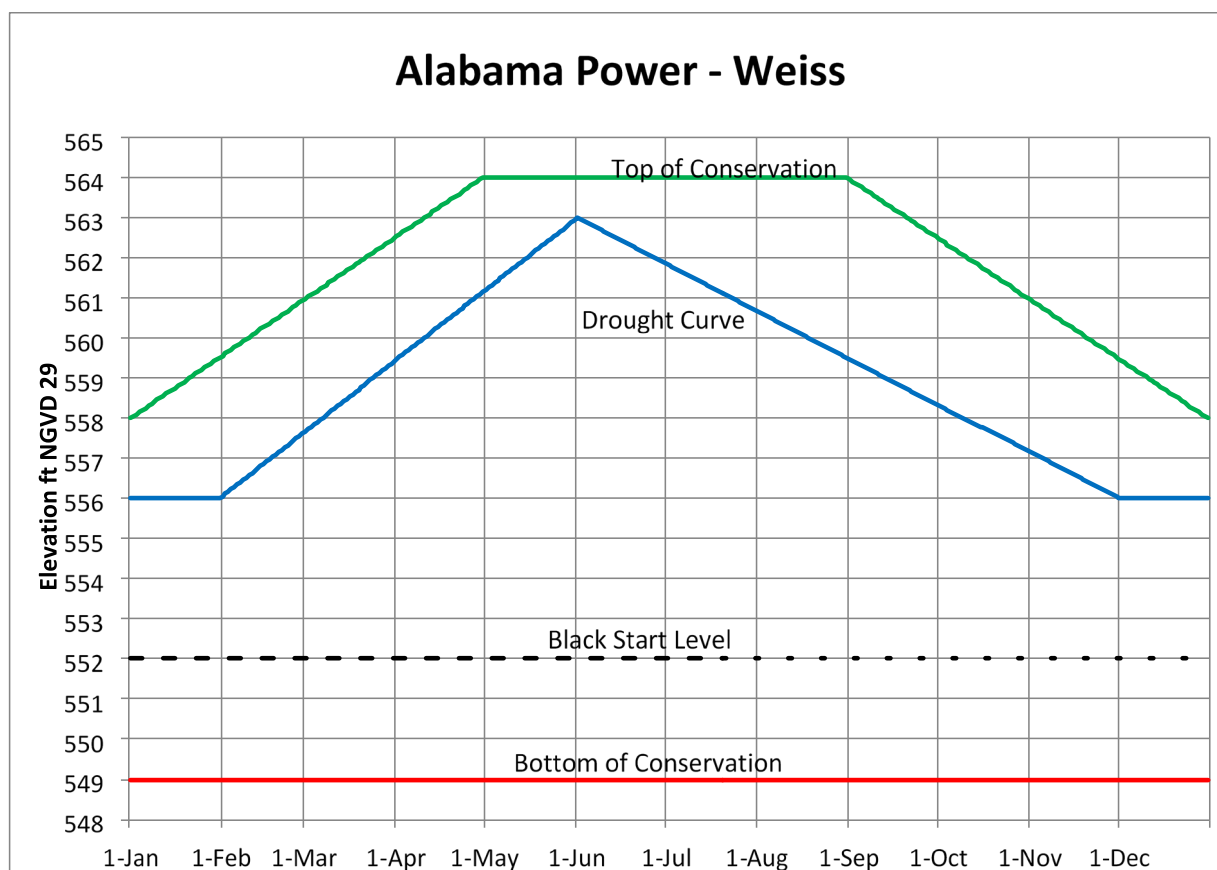


Figure 6. Weiss Lake Guide Curve

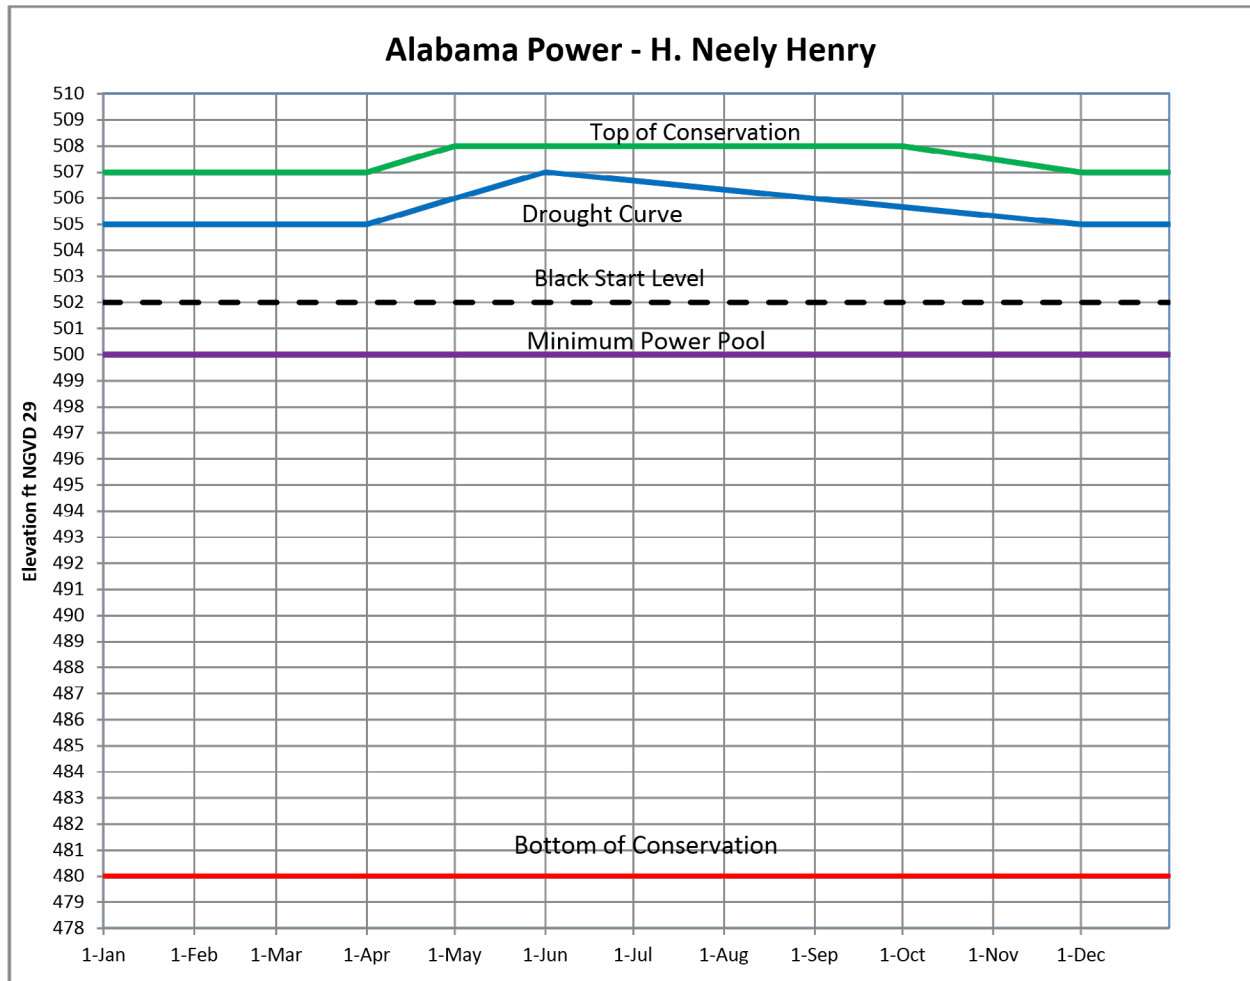


Figure 7. H. Neely Henry Lake Guide Curve

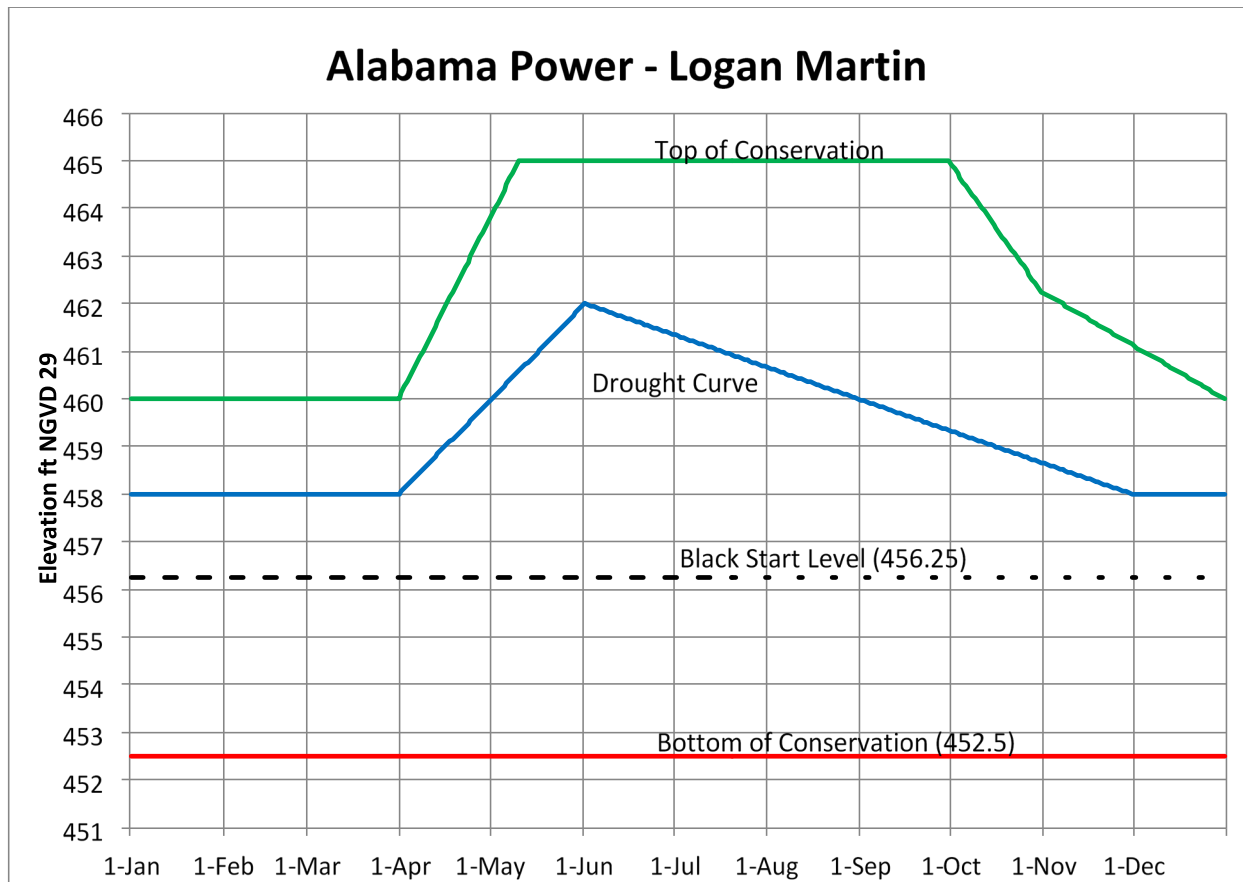


Figure 8. Logan Martin Lake Guide Curve

The downstream Coosa River APC run-of-river hydropower projects (Lay Dam and Lake, Mitchell Dam and Lake, and Jordan/Bouldin Dams and Lake) have no appreciable storage and are operated in conjunction with the upstream Coosa projects to meet downstream flow requirements and targets in support of the ACT Basin Drought Plan and navigation.

E. APC Tallapoosa River Projects. APC owns and operates the Tallapoosa River system of projects at Harris Dam and Lake, Martin Dam and Lake, Yates Dam, and Thurlow Dam in the ACT Basin. APC Tallapoosa River projects function mainly to generate electricity by hydropower. In addition, the Robert L. Harris Project operates pursuant to 33 CFR, Chapter II, Part 208, Section 208.65 regarding the requirement for the project to be operated for flood risk management and navigation in accordance with reasonable rules and regulations of the Secretary of the Army. The rules and regulations prescribed are described in a memorandum of understanding between the Corps and APC, individual water control manuals for the APC projects, and this DCP.

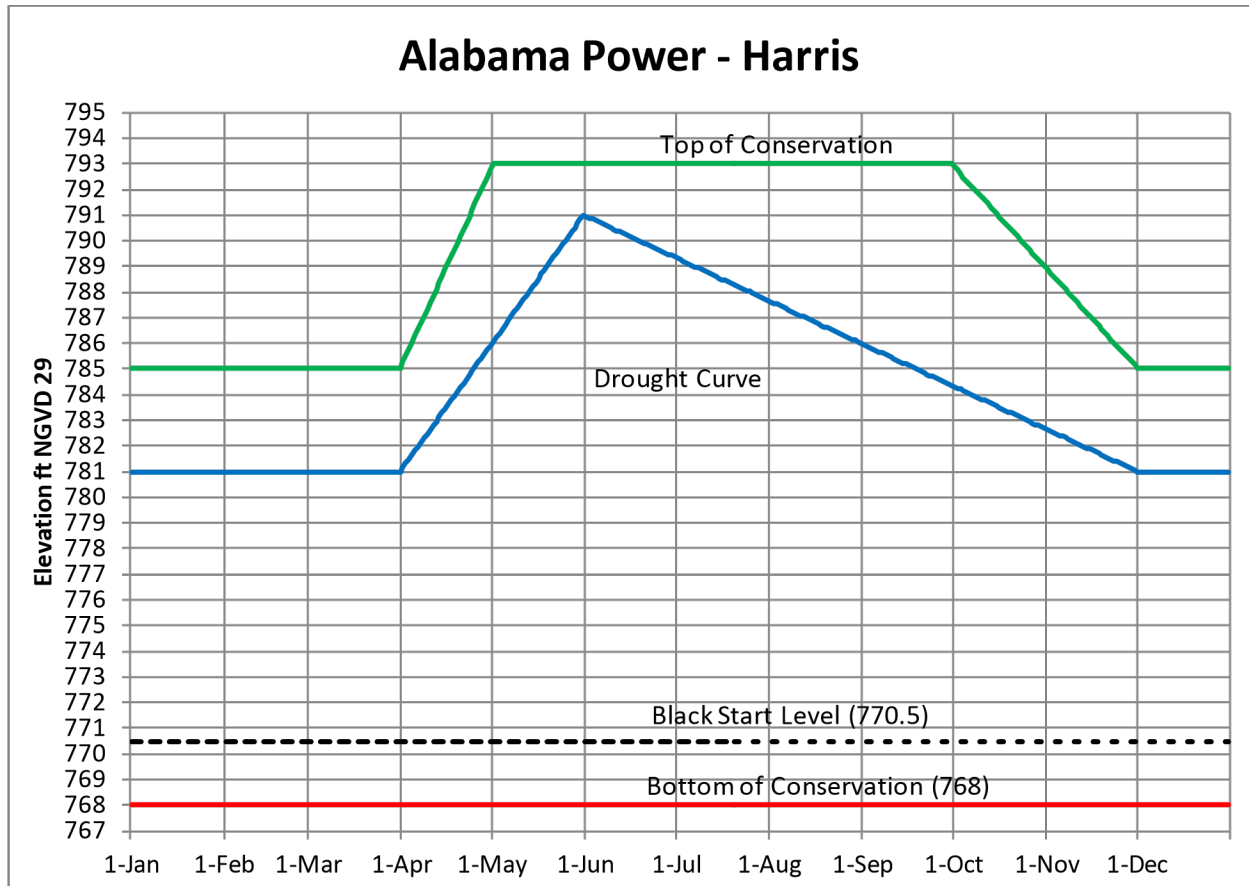


Figure 9. Robert L. Harris Lake Guide Curve

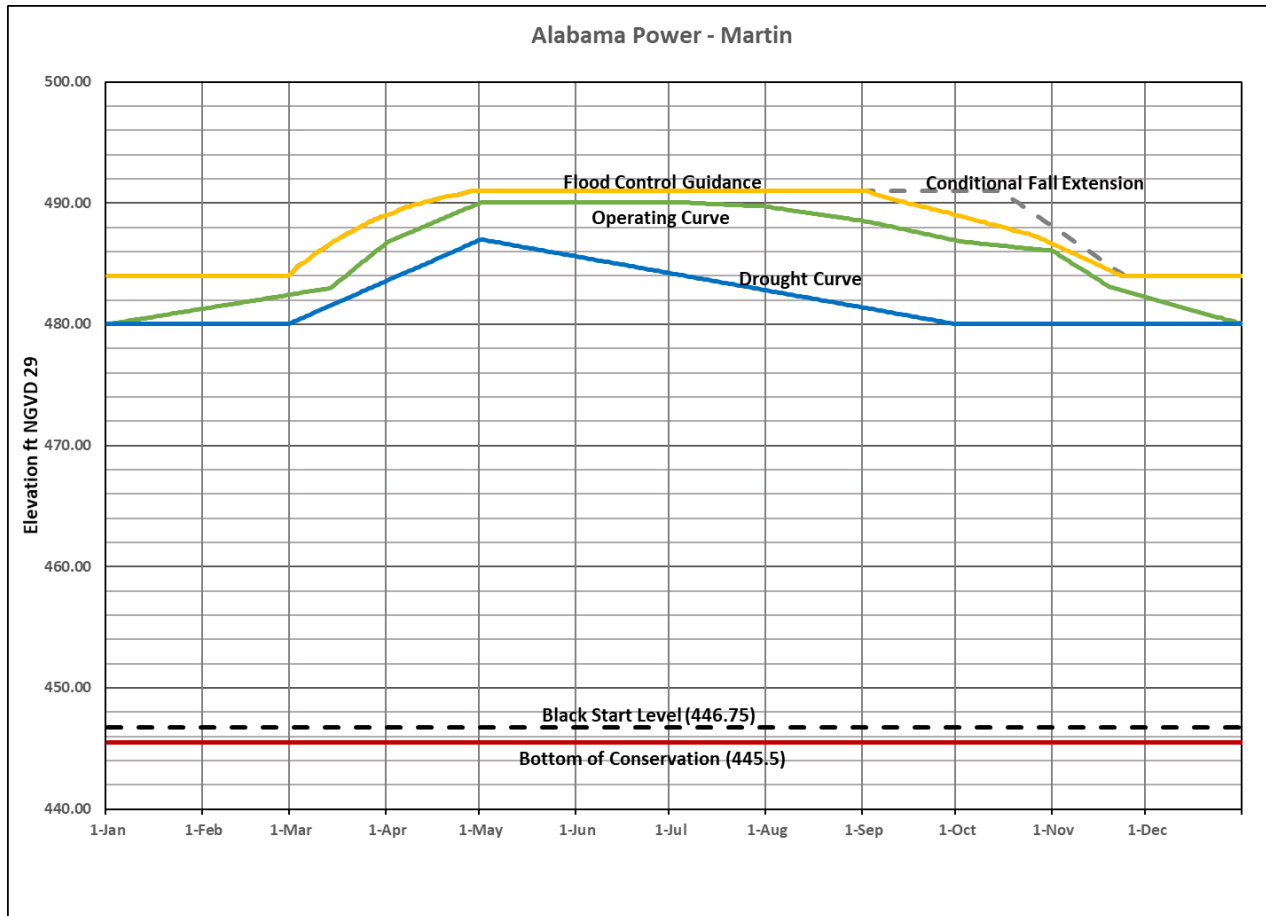


Figure 10. Martin Lake Guide Curve

F. Corps Alabama River Projects. The Corps operates three run-of-river lock and dam projects (Robert F. Henry, Millers Ferry, Claiborne) on the Alabama River in the lower ACT Basin to support commercial navigation. Claiborne Lake, together with R.E. “Bob” Woodruff Lake and William “Bill” Dannelly Lake, are collectively referred to as the Alabama River Lakes.

The primary location used for communicating the available reliable navigation depth is the Claiborne Lock and Dam tailwater elevation. The water surface elevation is related to the available navigation depth based on the latest hydrographic surveys of the lower Alabama River reach downstream of Claiborne.

(1) **Robert F. Henry.** The R.E. “Bob” Woodruff Lake is created by the Robert F. Henry Lock and Dam on the Alabama River at river mile 236.3. R.E. “Bob” Woodruff Lake extends from the Robert F. Henry Lock and Dam upstream to the Walter Bouldin Dam. In addition to hydropower and navigation, R.E. “Bob” Woodruff Lake provides recreation and fish and wildlife conservation. R.E. “Bob” Woodruff Lake is 77 miles long and averages 1,300 feet wide. It has a surface area of 12,510 acres and a storage capacity of 234,200 acre-feet at a normal pool elevation of 126 feet NGVD29. Lake levels are typically fairly stable with minimal fluctuation between the operating pool elevation limits, 123 feet NGVD29 to 126 feet NGVD29. The emergency drawdown pool elevation is 122 feet NGVD29. An authorized 9-foot-deep by 200-foot-wide navigation channel exists over the entire length of the lake. The Jones Bluff hydropower plant generating capacity is 82 MW (declared value). The lake is a popular recreation destination, receiving up to two million visitors annually.

(2) Millers Ferry. The William “Bill” Dannelly Lake is created by the Millers Ferry Lock and Dam on the Alabama River at river mile 133. William “Bill” Dannelly Lake is 103 miles long and averages almost 1,400 feet wide. The reservoir has a surface area of 18,500 acres and a storage capacity of 346,254 acre-feet at a normal full pool elevation of 80 feet NGVD29. Lake levels remain fairly stable on a day-to-day basis with minimal fluctuation between the operating pool elevation limits, 79 feet NGVD29 to 80 feet NGVD29. It has an authorized 9-foot-deep by 200-foot-wide navigation channel which extends the entire length of the reservoir. The facility is a multipurpose reservoir constructed by the Corps for both navigation and hydropower. The reservoir also provides recreational benefits and has lands managed for wildlife mitigation. The Millers Ferry hydropower plant generating capacity is 90 MW (declared value). The reservoir provides ample recreation opportunities. Recreation visitors number three million annually.

(3) Claiborne. Claiborne Lake is created by the Claiborne Lock and Dam on the Alabama River at river mile 72.5. The lake is similar to a wide river, averaging about 800 feet wide, with a surface area of 5,930 acres. Claiborne Lake extends 60 miles upstream to the Millers Ferry Lock and Dam. Storage capacity in the lake is 96,360 acre-feet at a normal pool elevation of 35 feet NGVD29. The operating pool elevation limits are between 32 feet NGVD29 and 36 feet NGVD29. The lake has an authorized 9-foot-deep, 200-foot-wide navigation channel extending its entire length. The primary purpose of the Corps project is navigation. No hydropower generating capability exists at the project. The lake also provides recreation benefits and lands managed for wildlife mitigation.

G. As other ACT water management objectives are addressed, lake levels might decline during prime recreation periods. Drought conditions will cause further drawdowns in lake levels. While lake levels will be slightly higher than what would naturally occur if no specific drought actions are taken, reservoir levels will decline thus triggering impacts associated with reaching initial recreation and water access limited levels. Large reservoir drawdowns impact recreational use: access to the water for boaters and swimmers is inhibited; submerged hazards (e.g., trees, shoals, boulders) become exposed or nearly exposed, posing safety issues; and exposed banks and lake bottoms become unsightly and diminish the recreation experience. Consequently, certain levels are identified in each Corps impoundment at which recreation would be affected. The *Initial Impact level* (IIL) represents the level at which recreation impacts are first observed (i.e., some boat launching ramps are unusable, most beaches are unusable or minimally usable, and navigation hazards begin to surface). The *Recreation Impact level* (RIL) defines the level at which major impacts on concessionaires and recreation are observed (more ramps are not usable, all beaches are unusable, boats begin having problems maneuvering in and out of marina basin areas, loss of retail business occurs). The level at which severe impacts are observed in all aspects of recreational activities is called the *Water Access Limited level* (WAL). At this point, all or almost all boat ramps are out of service, all swimming beaches are unusable, major navigation hazards occur, channels to marinas are impassable and/or wet slips must be relocated, and a majority of private boat docks are unusable. The individual project water control manuals describe the specific impact levels at each project and provide information regarding the effects of the water control plans on recreation.

V – WATER USES AND USERS

5-01. Water Uses and Users.

A. Uses – The ACT Basin rivers and lakes provide for wastewater dilution, M&I water supply, fish and wildlife propagation, hydropower generation, and recreation.

B. Users – The following tables list the surface water uses and water users within Georgia and Alabama in the ACT Basin.

Table 2. Surface Water Withdrawals, Coosa and Tallapoosa Rivers, 2015

Water use category	Quantity (mgd/day)	% of total
Total Use	466.3	100%
Public Supply	145.2	31.1%
Domestic and Commercial	10.61	2.3%
Industrial and Mining	37.89	8.1%
Irrigation	10.14	2.2%
Livestock & Aquaculture	17.6	3.8%
Thermoelectric Power Generation	244.9	52.5%

Source: Estimated Use of Water in Georgia for 2015 and Water-Use Trends, 1985-2015, Open-File Report 2019-1086, U.S. Department of the Interior, U.S. Geological Survey

Table 3. M&I surface water withdrawal permits in the ACT Basin (Georgia)

River basin	Permit holder	Permit number	County	Source water	Permit limit max day (mgd)	Permit limit monthly (mgd)
Coosa River Basin (Georgia)—upstream counties to downstream counties						
Coosa	Dalton Utilities, Conasauga R	155-1404-01	Whitfield	Conasauga River	49.400	40.300
Coosa	Dalton Utilities, Mill Creek	155-1404-02	Whitfield	Mill Creek	13.200	7.500
Coosa	Dalton Utilities, Coahulla Cr	155-1404-03	Whitfield	Coahulla Creek	6.000	5.000
Coosa	Dalton Utilities, Freeman Springs	155-1404-04	Whitfield	Freeman Springs	2.000	1.500
Coosa	Dalton Utilities - River Road	155-1404-05	Whitfield	Conasauga River	35.000	18.000
Coosa	Chatsworth WW Commission	105-1405-01	Murray	Holly Creek	1.100	1.000
Coosa	Chatsworth WW Commission	105-1405-02	Murray	Eton Springs	1.800	1.800
Coosa	Chatsworth WW Commission	105-1409-01	Murray	Carters Lake	2.550	2.300
Coosa	Chatsworth, City of	105-1493-02	Murray	Coosawattee River	2.200	2.000
Coosa	Ellijay, City of - Ellijay R	061-1407-01	Gilmer	Ellijay River	0.550	0.450
Coosa	Ellijay - Gilmer County W & S Authority	061-1408-01	Gilmer	Cartecay River	4.000	4.000
Coosa	Calhoun, City of	064-1411-03	Gordon	Big Spring	7.000	6.000
Coosa	Calhoun, City of	064-1412-01	Gordon	City Of Calhoun Spring	0.638	0.537
Coosa	Calhoun, City of	064-1492-02	Gordon	Oostanaula River	6.200	3.000

Table 3 (continued). M&I surface water withdrawal permits in the ACT Basin (Georgia)

River basin	Permit holder	Permit number	County	Source water	Permit limit max day (mgd)	Permit limit monthly average (mgd)
Coosa	Calhoun, City of	064-1493-01	Gordon	Coosawattee River	18.000	16.000
Coosa	Jasper, City of	112-1417-02	Pickens	Long Swamp Creek	1.000	1.000
Coosa	Bent Tree Community, Inc.	112-1417-03	Pickens	Chestnut Cove Creek and unnamed creek	0.250	0.230
Coosa	Bent Tree Community, Inc.	112-1417-04	Pickens	Lake Tamarack	0.250	0.230
Coosa	Big Canoe Utilities Company, Inc.	112-1417-05	Pickens	Lake Petit	1.000	1.000
Coosa	Big Canoe Utilities Company, Inc.	112-1417-06	Pickens	Blackwell Creek	2.650	2.650
Coosa	Etowah Water & Sewer Authority	042-1415-01	Dawson	Etowah River	5.500	4.400
Coosa	Cherokee County Water & Sewerage Auth	028-1416-01	Cherokee	Etowah River	43.200	36.000
Coosa	Gold Kist, Inc	028-1491-03	Cherokee	Etowah River	5.000	4.500
Coosa	Canton, City of	028-1491-04	Cherokee	Etowah River	23.000	18.700
Coosa	Canton, City of (Hickory Log Creek)	028-1491-05	Cherokee	Etowah River	39.000	39.000
Coosa	Bartow County Water Department	008-1411-02	Bartow	Bolivar Springs	0.800	0.800
Coosa	Adairsville, City of	008-1412-02	Bartow	Lewis Spring	5.100	4.100
Coosa	New Riverside Ochre Company, Inc.	008-1421-01	Bartow	Etowah River	5.000	5.000
Coosa	New Riverside Ochre Company, Inc.	008-1421-02	Bartow	Etowah River	6.000	6.000
Coosa	Emerson, City of	008-1422-02	Bartow	Moss Springs	0.630	0.500
Coosa	Gerdau AmeriSteel US, Inc. – Cartersville Steel Mill	008-1423-01	Bartow	Pettit Creek	2.000	1.500
Coosa	Baroid Drilling Fluids, Inc.	008-1423-02	Bartow	Etowah River	3.400	2.500
Coosa	Cartersville, City of	008-1423-04	Bartow	Etowah River	26.420	23.000
Coosa	Georgia Power Co. - Plant Bowen	008-1491-01	Bartow	Etowah River	520.000	85.000
Coosa	CCMWA	008-1491-05	Bartow	Allatoona Lake	86.000	78.000
Coosa	Cartersville, City of	008-1491-06	Bartow	Allatoona Lake	21.420	18.000
Coosa	La Fayette, City of Dry Creek	146-1401-01	Walker	Dry Creek	1.000	0.900
Coosa	La Fayette, City of Big Spring	146-1401-02	Walker	Big Spring	1.650	1.310
Coosa	Mount Vernon Mills - Riegel Apparel Div.	027-1401-03	Chattooga	Trion Spring	9.900	6.600
Coosa	Summerville, City of	027-1402-02	Chattooga	Raccoon Creek	3.000	2.500
Coosa	Summerville, City of	027-1402-04	Chattooga	Lowe Spring	0.750	0.500
Coosa	Mohawk Industries, Inc.	027-1402-05	Chattooga	Chattooga R./ Raccoon Cr.	4.500	4.000
Coosa	Oglethorpe Power Corp.	057-1402-03	Floyd	Heath Creek	3,838.000	3,030.000
Coosa	Floyd County - Brighton Plant	057-1414-02	Floyd	Woodward Creek	0.800	0.700

Table 3 (continued). M&I surface water withdrawal permits in the ACT Basin (Georgia)

River basin	Permit holder	Permit number	County	Source water	Permit limit max day (mgd)	Permit limit monthly average (mgd)
Coosa	Cave Spring, City of	057-1428-06	Floyd	Cave Spring	1.500	1.300
Coosa	Floyd County	057-1428-08	Floyd	Old Mill Spring	4.000	3.500
Coosa	Berry Schools, The (Berry College)	057-1429-01	Floyd	Berry (Possum Trot) Reservoir	1.000	0.700
Coosa	Inland-Rome Inc.	057-1490-01	Floyd	Coosa River	34.000	32.000
Coosa	Georgia Power Co. - Plant Hammond	057-1490-02	Floyd	Coosa River	655.000	655.000
Coosa	Rome, City of	057-1492-01	Floyd	Oostanaula & Etowah R	18.000	16.400
Coosa	Rockmart, City of	115-1425-01	Polk	Euharlee Creek	2.000	1.500
Coosa	Vulcan Construction Materials, L.P.	115-1425-03	Polk	Euharlee Creek	0.200	0.200
Coosa	Cedartown, City of	115-1428-04	Polk	Big Spring	3.000	2.600
Coosa	Polk County Water Authority	115-1428-05	Polk	Aragon, Morgan, Mulco Springs	1.600	1.100
Coosa	Polk County Water Authority	115-1428-07	Polk	Deaton Spring	4.000	4.000
Tallapoosa River Basin (Georgia)						
Tallapoosa	Haralson County Water Authority	071-1301-01	Haralson	Tallapoosa River	3.750	3.750
Tallapoosa	Bremen, City of	071-1301-02	Haralson	Beech Creek & Bremen Reservoir (Bush Creek)	0.800	0.580
Tallapoosa	Bowdon, City of Indian	022-1302-01	Carroll	Indian Creek	0.400	0.360
Tallapoosa	Southwire Company	022-1302-02	Carroll	Buffalo Creek	2.000	1.000
Tallapoosa	Villa Rica, City of	022-1302-04	Carroll	Lake Paradise & Cowens Lake	1.500	1.500
Tallapoosa	Carrollton, City of	022-1302-05	Carroll	Little Tallapoosa River	12.000	12.000
Tallapoosa	Bowdon, City of Lake Tysinger	022-1302-06	Carroll	Lake Tysinger	1.000	1.000

Source: GAEPD 2009a

Table 4. M&I surface water withdrawals in the ACT Basin (Georgia)

Basin (subbasin)	Withdrawal by	County	Withdrawal (mgd)
Coosa River Basin (Georgia)			
Coosa (Conasauga)	Dalton Utilities	Whitfield	35.38
Coosa (Conasauga)	City of Chatsworth	Murray	1.26
Coosa (Coosawattee)	Ellijay-Gilmer County Water System	Gilmer	3.12
Coosa (Coosawattee)	City of Fairmount	Gordon	0.06
Coosa (Oostanaula)	City of Calhoun	Gordon	9.10
Coosa (Etowah)	Big Canoe Corporation	Pickens	0.48
Coosa (Etowah)	City of Jasper	Pickens	1.00
Coosa (Etowah)	Bent Tree Community	Pickens	0.07
Coosa (Etowah)	Lexington Components Inc (Rubber)	Pickens	0.01
Coosa (Etowah)	Etowah Water and Sewer Authority	Dawson	1.50
Coosa (Etowah)	Town of Dawsonville	Dawson	0.10
Coosa (Etowah)	City of Canton	Cherokee	2.83
Coosa (Etowah)	Cherokee County Water System	Cherokee	15.81
Coosa (Etowah)a	Gold Kist, Inc.	Cherokee	1.94
Coosa (Etowah)	City of Cartersville	Bartow	13.26
Coosa (Etowah)	New Riverside Ochre Company, Inc (Chemicals)	Bartow	1.67
Coosa (Etowah)	Gerdau AmeriSteel US, Inc. – Cartersville Steel Mill (Primary metals)	Bartow	0.16
Coosa (Etowah)	Georgia Power Co – Plant Bowen	Bartow	38.92
Coosa (Etowah)	CCMWA	Bartow	44.42
Coosa (Upper Coosa)	City of Lafayette	Walker	1.20
Coosa (Upper Coosa)	City of Summerville	Chattooga	2.05
Coosa (Upper Coosa)	Mount Vernon Mills – Riegel Apparel Division (Textiles)	Chattooga	2.74
Coosa (Oostanaula)	City of Cave Spring (Domestic/Commercial)	Floyd	0.30
Coosa (Etowah / Oostanaula)	City of Rome	Floyd	9.98
Coosa (Upper Coosa)	Floyd County Water System	Floyd	2.57
Coosa (Upper Coosa)	Inland-Rome Inc. (Paper)	Floyd	25.74
Coosa (Upper Coosa)	Georgia Power Co - Plant Hammond	Floyd	535.00
Coosa (Upper Coosa)	Polk County Water Authority	Polk	2.22
Coosa (Etowah)	Vulcan Construction Materials	Polk	0.09
Tallapoosa River Basin (Georgia)			
Tallapoosa (Upper)	City of Bremen	Haralson	0.32
Tallapoosa (Upper)	Haralson County Water Authority	Haralson	2.05
Tallapoosa (Upper)	City of Bowdon	Carroll	0.75
Tallapoosa (Upper)	Southwire Company	Carroll	0.09
Tallapoosa (Upper)	City of Carrollton	Carroll	5.37
Tallapoosa (Upper)	City of Temple	Carroll	0.26
Tallapoosa (Upper)	City of Villa Rica	Carroll	0.58
Tallapoosa (Upper)	Carroll County Water System	Carroll	4.08

Table 5. Surface Water Withdrawals, ACT Basin, Alabama, 2015 (mgd)

ACT subbasin	HUC	Public supply	Residential	Irrigation	Aquaculture	Livestock	Industrial	Mining	Thermoelectric	Total, by Subbasin
Upper Coosa	3150105	1.65	0	3.47	0.01	0.47	0	0	0	5.6
Middle Coosa	3150106	27.7	0	10.84	0.12	0.87	40.98	0.1	105.52	186.13
Lower Coosa	3150107	10.43	0	3.71	0	0.26	0	0.39	462.22	477.01
Upper Tallapoosa	3150108	0.88	0	0.1	0	0.3	0	0	0	1.28
Middle Tallapoosa	3150109	17.51	0	1.16	0	0.34	0	0.07	0	19.08
Lower Tallapoosa	3150110	27.22	0	7.58	0.07	0.26	0	0.96	0	36.09
Upper Alabama	3150201	0	0	7.48	1.79	0.89	63.66	1.16	11.86	86.84
Cahaba	3150202	51.07	0	5.61	1.41	0.25	0	0.21	0	58.55
Middle Alabama	3150203	1.96	0	3.15	3.09	0.41	19.67	0.15	0	28.43
Lower Alabama	3150204	0	0	0.91	0.09	0.11	49.31	0	0	50.42
Total - By Use Category		138.42	0	44.01	6.58	4.16	173.62	3.04	579.6	949.43

Source: Estimated 2015 Water Use and Surface Water Availability in Alabama, Office of Water Resources, Alabama Department of Economic and Community Affairs

Source: Hutson et al. 2009

Table 6. M&I surface water withdrawals in the ACT Basin (Alabama)

Basin (subbasin)	Withdrawal by	County	Withdrawal (mgd)
Coosa River Basin (Alabama)			
Coosa (Upper)	Centre Water Works & Sewer Board	Cherokee	1.19
Coosa (Upper)	Piedmont Water Works & Sewer Board	Calhoun	0.93
Coosa (Middle)	Jacksonville Water Works & Sewer Board	Calhoun	1.34
Coosa (Middle)	Anniston Water Works & Sewer Board	Calhoun	0.08
Coosa (Middle)	Fort Payne Water Works Board	DeKalb	8.10
Coosa (Middle)	Goodyear Tire and Rubber Company	Etowah	9.87
Coosa (Middle)	Gadsden Water Works & Sewer Board	Etowah	14.86
Coosa (Middle)	Alabama Power Co – Gadsden Steam Plant	Etowah	142.68
Coosa (Middle)	SIC 32 – Unnamed Stone, Glass, Clay, and/or Concrete Products	St. Clair	3.49
Coosa (Middle)	Talladega/Shelby Water Treatment Plant	Talladega	6.44
Coosa (Middle)	Talladega County Water Department	Talladega	0.81
Coosa (Middle)	Talladega Water Works & Sewer Board	Talladega	1.62
Coosa (Middle)	Bowater Newsprint, Coosa Pines Operation	Talladega	52.47
Coosa (Lower)	Sylacauga Utilities Board	Talladega	3.25
Coosa (Lower)	SIC 22 – Unnamed Textile	Talladega	0.89
Coosa (Lower)	Goodwater Water Works & Sewer Board	Coosa	0.46
Coosa (Lower)	Alabama Power Co – E.C. Gaston Plant	Shelby	812.32
Coosa (Lower)	Clanton Waterworks & Sewer Board	Chilton	1.79
Coosa (Lower)	Five Star Water Supply	Elmore	5.46

Basin (subbasin)	Withdrawal by	County	Withdrawal (mgd)
Tallapoosa River Basin (Alabama)			
Tallapoosa (Upper)	Heflin Water Works	Cleburne	0.51
Tallapoosa (Upper)	Wedowee Gas, Water, and Sewer	Randolph	0.39
Tallapoosa (Middle)	Roanoke Utilities Board	Randolph	1.29
Tallapoosa (Middle)	Clay County Water Authority	Clay	1.87
Tallapoosa (Middle)	Lafayette	Chambers	0.53
Tallapoosa (Middle)	Central Elmore Water & Sewer Authority	Elmore	4.83
Tallapoosa (Middle)	Alexander City Water Department	Tallapoosa	10.57
Tallapoosa (Lower)	West Point Home, Inc	Lee	2.23
Tallapoosa (Lower)	Opelika Water Works Board	Lee	2.61
Tallapoosa (Lower)	Auburn Water Works Board	Lee	5.75
Tallapoosa (Lower)	Tallassee	Tallapoosa	1.98
Tallapoosa (Lower)	Tuskegee Utilities	Macon	2.71
Tallapoosa (Lower)	Montgomery Water Works & Sewer Board	Montgomery	25.17
Alabama River Basin			
Alabama (Upper)	Montgomery Water Works & Sewer Board	Montgomery	10.40
Alabama (Upper)	International Paper	Autauga	30.63
Alabama (Upper)	Southern Power Co – Plant E. B. Harris	Autauga	4.14
Alabama (Cahaba)	Birmingham Water Works & Sewer Board	Shelby	52.90
Alabama (Middle)	International Paper – Pine Hill	Wilcox	21.04
Alabama (Lower)	Alabama River Pulp Company	Monroe	54.61

Source: Hutson et al. 2009

VI. – CONSTRAINTS

6-01. General. The availability of water resources in the ACT Basin is constrained by existing water supply storage contracts, Corps water control manuals, minimum flow requirements from Allatoona and Carters Dams, APC FERC licenses, Corps-APC Memorandum of Understanding, and industrial water quality flow needs. Existing water supply storage contracts do not include the use of the inactive storage pool and would require developing and implementing an emergency storage contract in order to access this water resource. Each Corps project has a water control manual that specifies operational requirements for varying basin conditions and requires a deviation approval to operate outside the parameters established by the manual.

The Allatoona Project has a minimum flow release requirement of 240 cfs for downstream purposes. The Carters Project has a seasonally varying minimum flow release requirement that ranges from 250 – 865 cfs during normal conditions and a minimum of 240 cfs during low flow conditions. The APC projects are operated under FERC licenses which define specific operational requirements for each project and require approval from FERC and possibly the Corps and State agencies before any revised operations could be implemented. The Corps and APC projects are also operated under the rules and regulations found in the Corps-APC Memorandum of Understanding, which describes operational requirements for flood conditions and navigation within the ACT Basin. Some NPDES permits within the ACT Basin have water quality discharge limitations which are impacted by the volume of water flow in the river.

VII – DROUGHT MANAGEMENT PLAN

7-01. General. The Drought Contingency Plan (DCP) for the ACT Basin implements drought conservation actions on the basis of composite system storage, state line flows, and basin inflow as triggers to drive drought response actions. The DCP also recognizes that a basinwide drought plan must incorporate variable hydropower generation requirements from its headwater projects in Georgia (Allatoona Dam and Carters Dam), a reduction in the level of navigation service provided on the Alabama River as storage across the basin declines, and that environmental flow requirements must still be met to the maximum extent practicable. The ACT basin-wide drought plan is composed of three components — Headwater regulation at Allatoona Lake and Carters Lake in Georgia; Regulation at APC projects on the Coosa and Tallapoosa Rivers; and Downstream Alabama River regulation at Corps projects downstream of Montgomery, Alabama.

A. Headwater Regulation for Drought at Allatoona Lake and Carters Lake. Drought regulation at Allatoona Lake and Carters Lake consists of progressively reduced hydropower generation as pool levels decline in accordance with the conservation storage action zones established in the projects' water control plans. For instance, when Allatoona Lake is operating in normal conditions (Conservation storage Zone 1); hydropower generation typically ranges from 0 to 4 hours per day. However, as the pool drops to lower action zones during drought conditions, generation could be reduced to 0 to 2 hours per day. As Carters Lake pool level might drop into a conservation storage Zone 2, seasonal varying minimum target flows would be reduced to 240 cfs. The water control manual for each project describes the drought water control regulation plan in more detail.

B. Drought Regulation at APC Projects on the Coosa, Tallapoosa, and Alabama River. Regulation guidelines for the Coosa, Tallapoosa, and Alabama Rivers have been defined in a drought regulation matrix (Table 7) on the basis of a Drought Intensity Level (DIL). The DIL is a drought indicator, ranging from one to three. The DIL is determined on the basis of three basin drought criteria (or triggers). A DIL from 1 to 3 indicates some level of drought conditions. The DIL increases as more of the drought indicator thresholds (or triggers) occur. The drought regulation matrix defines minimum average daily flow requirements on a monthly basis for the Coosa, Tallapoosa, and Alabama Rivers as a function of the DIL and time of year. The combined occurrences of the drought triggers determine the DIL. Three intensity levels for drought operations are applicable to APC projects.

DIL 1 — (moderate drought) 1 of 3 triggers occur

DIL 2 — (severe drought) 2 of 3 triggers occur

DIL 3 — (exceptional drought) all 3 triggers occur

(1) Drought Indicators. The indicators used to determine drought intensity include the following:

1. **Low basin inflow.** The total basin inflow needed is the sum of the total filling volume plus 4,640 cfs. The total filling volume is defined as the volume of water required to return the pool to the top of the conservation guide curve and is calculated using the area capacity tables for each project. Table 8 lists the monthly low basin inflow criteria. The basin inflow value is computed daily and checked on the first and third Tuesday of the month. If computed basin inflow is less than the value required, the low basin inflow indicator is triggered. The basin inflow is total flow above the APC projects excluding Allatoona Lake and Carters Lake. It is the sum of local flows, minus lake evaporation and diversions. Figure 11 illustrates

the local inflows to the Coosa and Tallapoosa Basins. The basin inflow computation differs from the navigation basin inflow because it does not include releases from Allatoona Lake and Carters Lake. The intent is to capture the hydrologic condition across APC projects in the Coosa and Tallapoosa Basins.

Table 7. ACT Basin Drought Regulation Plan Matrix

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Drought Level Response ^a	Normal Operations											
	DIL 1: Low Basin Inflows or Low Composite or Low State Line Flow											
	DIL 2: DIL 1 criteria + (Low Basin Inflows or Low Composite or Low State Line Flow)											
	DIL 3: Low Basin Inflows + Low Composite + Low State Line Flow											
Coosa River Flow ^b	Normal Operation: 2,000 cfs			4,000 (8,000)		4,000 – 2,000		Normal Operation: 2,000 cfs				
	Jordan 2,000 +/-cfs			4,000 +/- cfs			6/15 Linear Ramp down	Jordan 2,000 +/-cfs			Jordan 2,000 +/-cfs	
	Jordan 1,600 to 2,000 +/-cfs			2,500 +/- cfs			6/15 Linear Ramp down	Jordan 2,000 +/-cfs			Jordan 1,600 to 2,000 +/-cfs	
	Jordan 1,600 +/-cfs			Jordan 1,600 to 2,000 +/-cfs				Jordan 2,000 +/-cfs		Jordan 1,600 to 2,000 +/-cfs		Jordan 1,600 +/-cfs
Tallapoosa River Flow ^c	Normal Operations: 1200 cfs											
	Greater of 1/2 Yates Inflow or 2 x Heflin Gage (Thurlow Lake releases > 350 cfs)				1/2 Yates Inflow					1/2 Yates Inflow		
	Thurlow Lake 350 cfs				1/2 Yates Inflow					Thurlow Lake 350 cfs		
	Maintain 400 cfs at Montgomery WTP (Thurlow Lake release 350 cfs)							Thurlow Lake 350 cfs		Maintain 400 cfs at Montgomery WTP (Thurlow Lake release 350 cfs)		
Alabama River Flow ^d	Normal Operation: Navigation or 4,640 cfs flow											
	4,200 cfs (10% Cut) - Montgomery				4,640 cfs - Montgomery					Reduce: Full – 4,200 cfs		
	3,700 cfs (20% Cut) - Montgomery				4,200 cfs (10% Cut) - Montgomery					Reduce: 4,200 cfs-> 3,700 cfs Montgomery (1 week ramp)		
	2,000 cfs Montgomery				3,700 cfs Montgomery			4,200 cfs (10% Cut) - Montgomery		Reduce: 4,200 cfs -> 2,000 cfs Montgomery (1 month ramp)		
Guide Curve Elevation	Normal Operations: Elevations follow Guide Curves as prescribed in License (Measured in Feet)											
	Corps Deviations: As Needed; FERC Deviation for Lake Martin											
	Corps Deviations: As Needed; FERC Deviation for Lake Martin											
	Corps Deviations: As Needed; FERC Deviation for Lake Martin											

a. Note these are based on flows that will be exceeded when possible.

b. Jordan flows are based on a continuous +/- 5% of target flow.

c. Thurlow Lake flows are based on continuous +/- 5% of target flow: flows are reset on noon each Tuesday based on the prior day's daily average at Heflin or Yates.

d. Alabama River flows are 7-Day Average Flow.

Table 8. Low Basin Inflow Guide (in cfs-days)

Month	Coosa Filling Volume	Tallapoosa Filling Volume	Total Filling Volume	Minimum JBT Target Flow	Required Basin Inflow
Jan	628	0	628	4,640	5,268
Feb	626	1,968	2,594	4,640	7,234
Mar	603	2,900	3,503	4,640	8,143
Apr	1,683	2,585	4,269	4,640	8,909
May	248	0	248	4,640	4,888
Jun	0	0	0	4,640	4,640
Jul	0	0	0	4,640	4,640
Aug	0	0	0	4,640	4,640
Sep	-612	-1,304	-1,916	4,640	2,724
Oct	-1,371	-2,132	-3,503	4,640	1,137
Nov	-920	-2,748	-3,667	4,640	973
Dec	-821	-1,126	-1,946	4,640	2,694

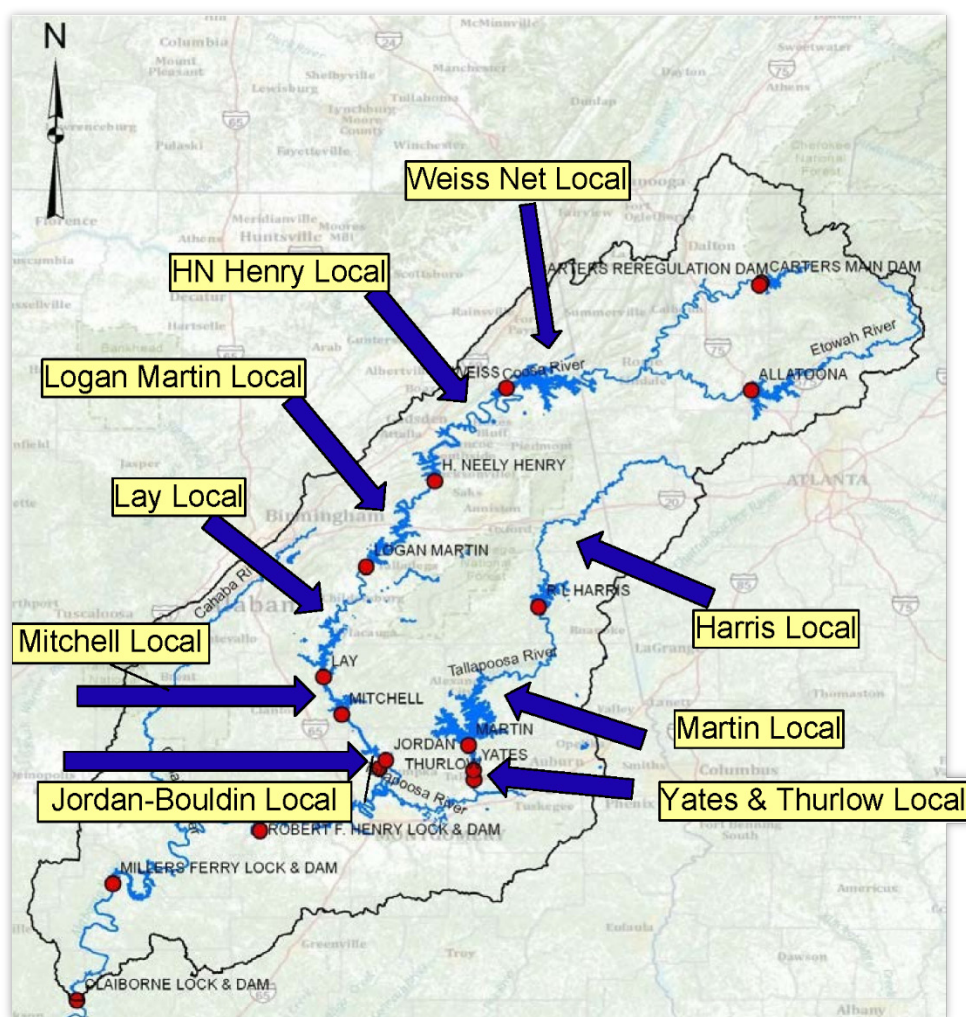


Figure 11. ACT Basin Inflows

2. Low composite conservation storage. Low composite conservation storage occurs when the APC projects' composite conservation storage is less than or equal to the storage available within the drought contingency curves for the APC reservoirs. Composite conservation storage is the sum of the amounts of storage available at the current elevation for each reservoir down to the drought contingency curve at each APC major storage project. The reservoirs considered for the trigger are R.L. Harris Lake, H. Neely Henry Lake, Logan Martin Lake, Lake Martin, and Weiss Lake. Figure 12 plots the APC composite zones. Figure 13 plots the APC low composite conservation storage trigger. If the actual active composite conservation storage is less than or equal to the active composite drought zone storage, the low composite conservation storage indicator is triggered. That computation is performed on the first and third Tuesday of each month and is considered along with the low state line flow trigger and basin inflow trigger.

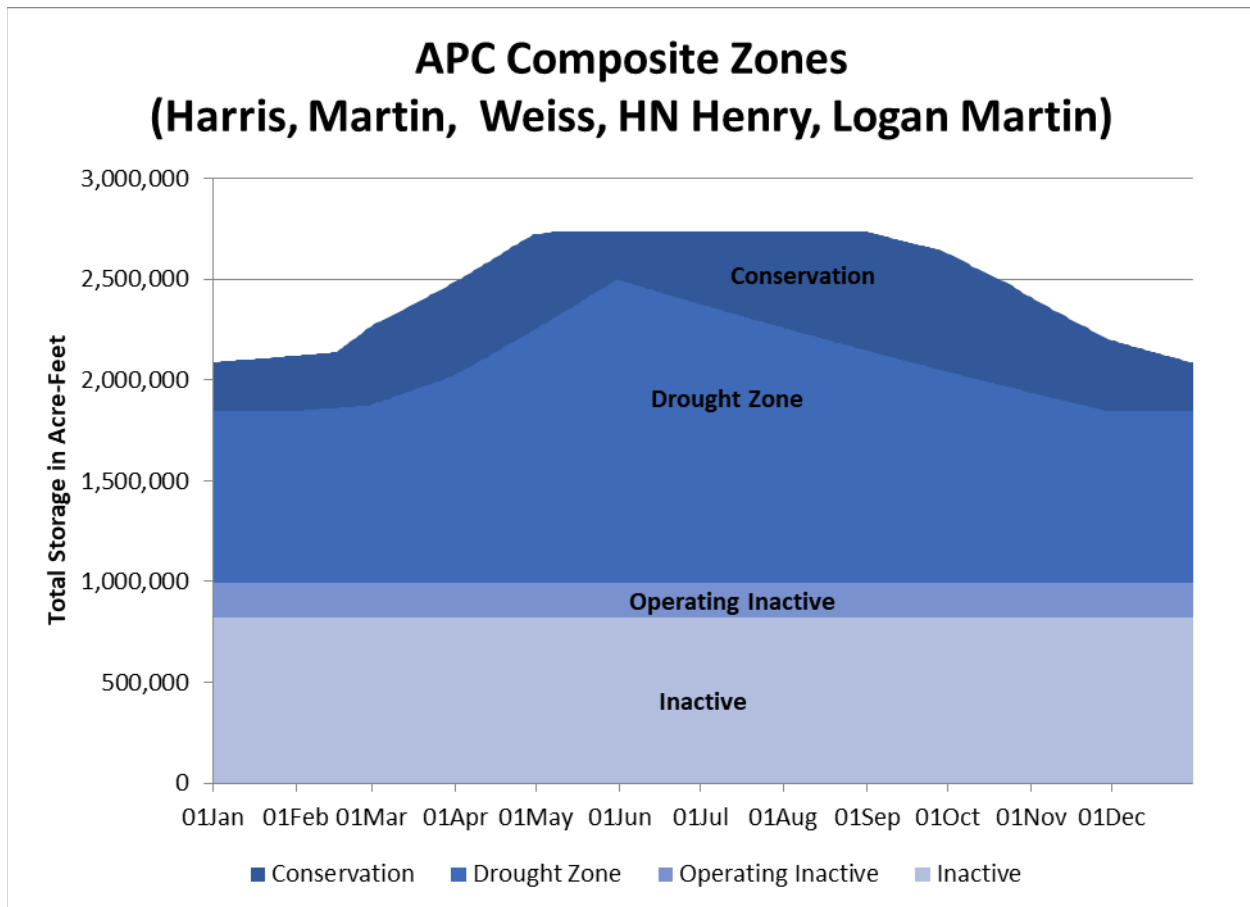


Figure 12. APC Composite Zones

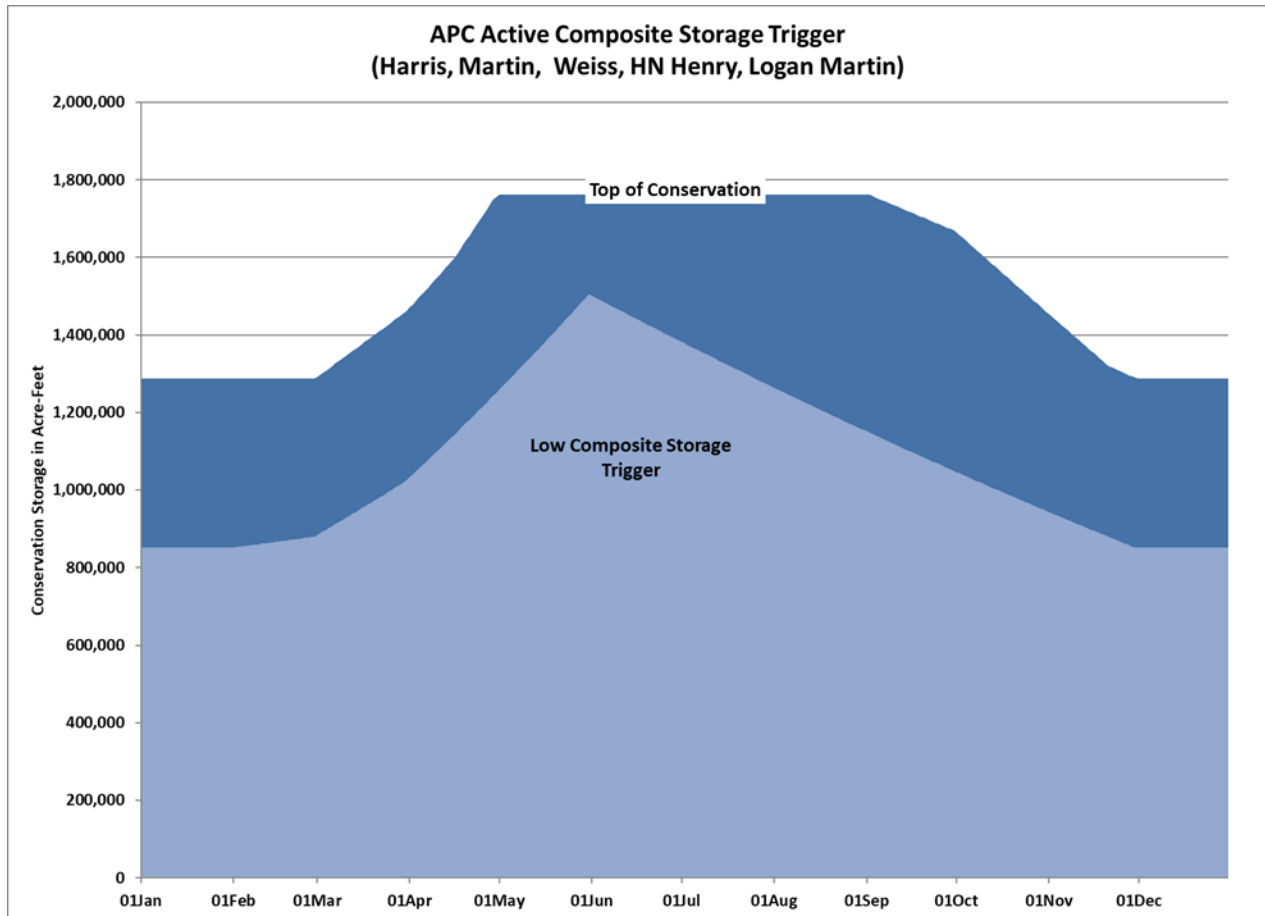


Figure 13. APC Low Composite Conservation Storage Drought Trigger

3. **Low state line flow.** A low state line flow trigger occurs when the Mayo's Bar USGS gage measures a flow below the monthly historical 7Q10 flow. The 7Q10 flow is defined as the lowest flow over a 7-day period that would occur once in 10 years. Table 9 lists the Mayo's Bar 7Q10 value for each month (determined from observed flows from 1949 – 2006). The lowest 7-day average flow over the past 14 days is computed and checked at the first and third Tuesday of the month. If the lowest 7-day average value is less than the Mayo's Bar 7Q10 value, the low state line flow indicator is triggered. If the result is greater than or equal to the trigger value from Table 9, the flow is considered normal, and the state line flow indicator is not triggered. The term state line flow is used in developing the drought management plan because of the proximity of the Mayo's Bar gage to the Alabama-Georgia state line and because it relates to flow data upstream of the Alabama-based APC reservoirs. State line flow is used only as a source of observed data for one of the three triggers and does not imply that flow targets exist at that geographic location. The ACT Basin drought matrix does not include or imply any Corps regulation that would result in water management decisions at Carters Lake or Allatoona Lake.

Table 9. State Line Flow Triggers

Month	Mayo's Bar (7Q10 in cfs)
Jan	2,544
Feb	2,982
Mar	3,258
Apr	2,911
May	2,497
Jun	2,153
Jul	1,693
Aug	1,601
Sep	1,406
Oct	1,325
Nov	1,608
Dec	2,043

Note: Based on USGS Coosa River at Rome Gage (Mayo's Bar, USGS 02397000) observed flow from 1949 to 2006

(2) **Drought Regulation.** The DIL is computed on the first and third Tuesday of each month. Once a drought operation is triggered, the DIL can only recover from drought condition at a rate of one level per period. For example, as the system begins to recover from an exceptional drought with DIL 3, the DIL must be stepped incrementally back to zero to resume normal operations. In that case, even if the system triggers return to normal quickly, it will still take at least a month before normal operations can resume - conditions can improve only to DIL 2 for the next 15 days, then DIL 1 for the next 15 days, before finally returning to normal operating conditions.

For normal operations, the matrix shows a Coosa River flow between 2,000 cfs and 4,000 cfs with peaking periods up to 8,000 cfs occurring. The required flow on the Tallapoosa River is a constant 1,200 cfs throughout the year. The navigation flows on the Alabama River are applied to the APC projects. The required navigation depth on the Alabama River is subject to the basin inflow.

For DIL 1, the Coosa River flow varies from 2,000 cfs to 4,000 cfs. On the Tallapoosa River, the required flow is the greater of one-half of the inflow into Yates Lake or twice the Heflin USGS gage from January through April. For the remainder of the year, the required flow is one-half of Yates Lake inflow. The required flows on the Alabama River are reduced from the amounts required for DIL 0.

For DIL 2, the Coosa River flow varies from 1,600 cfs to 2,500 cfs. On the Tallapoosa River, the minimum is 350 cfs for part of the year and one-half of Yates Lake inflow for the remainder of the year. The requirement on the Alabama River is between 3,700 cfs and 4,200 cfs. For DIL 3, the flows on the Coosa River range from 1,600 cfs to 2,000 cfs. A constant flow of 350 cfs on the Tallapoosa River is required. It is assumed an additional 50 cfs will occur between Thurlow Lake and the City of Montgomery water supply intake. Required flows on the Alabama River range from 2,000 cfs to 4,200 cfs.

In addition to the flow regulation for drought conditions, the DIL affects the flow regulation to support navigation operations. Under normal operations, the APC projects are operated to meet the needed navigation flow target or 4,640 cfs flow as defined in the navigation measure

section. Once drought operations begin, flow regulation to support navigation operations is suspended.

7-02. Extreme Drought Conditions. An extreme drought condition exists when the remaining composite conservation storage is depleted, and additional emergency actions may be necessary. When conditions have worsened to this extent, utilization of the inactive storage must be considered. Such an occurrence would typically be contemplated in the second or third year of a drought. Inactive storage capacities have been identified for the two federal projects with significant storage (Figures 14 and 15). The operational concept established for the extreme drought impact level and to be implemented when instituting the use of inactive storage is based on the following actions:

- (1) Inactive storage availability is identified to meet specific critical water use needs within existing project authorizations.
- (2) Emergency uses and users will be identified in accordance with emergency authorizations and through stakeholder coordination. Typical critical water use needs within the basin are associated with public health and safety.
- (3) Weekly projections of the inactive storage water availability to meet the critical water uses in the ACT Basin will be utilized when making water control decisions regarding withdrawals and water releases from the federal reservoirs.
- (4) The inactive storage action zones will be developed and instituted as triggers to meet the identified priority water uses (releases will be restricted as storage decreases).
- (5) Dam safety considerations will always remain the highest priority. The structural integrity of the dams due to static head limitations will be maintained.

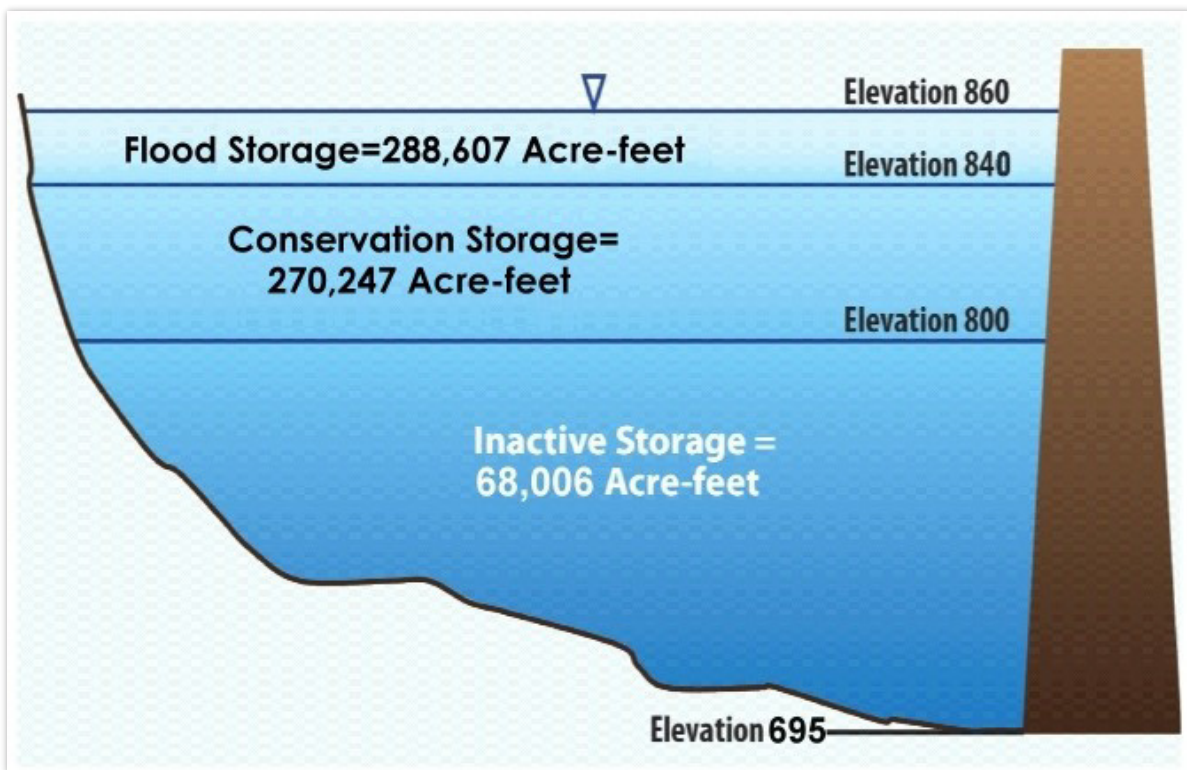


Figure 14. Storage in Allatoona Lake

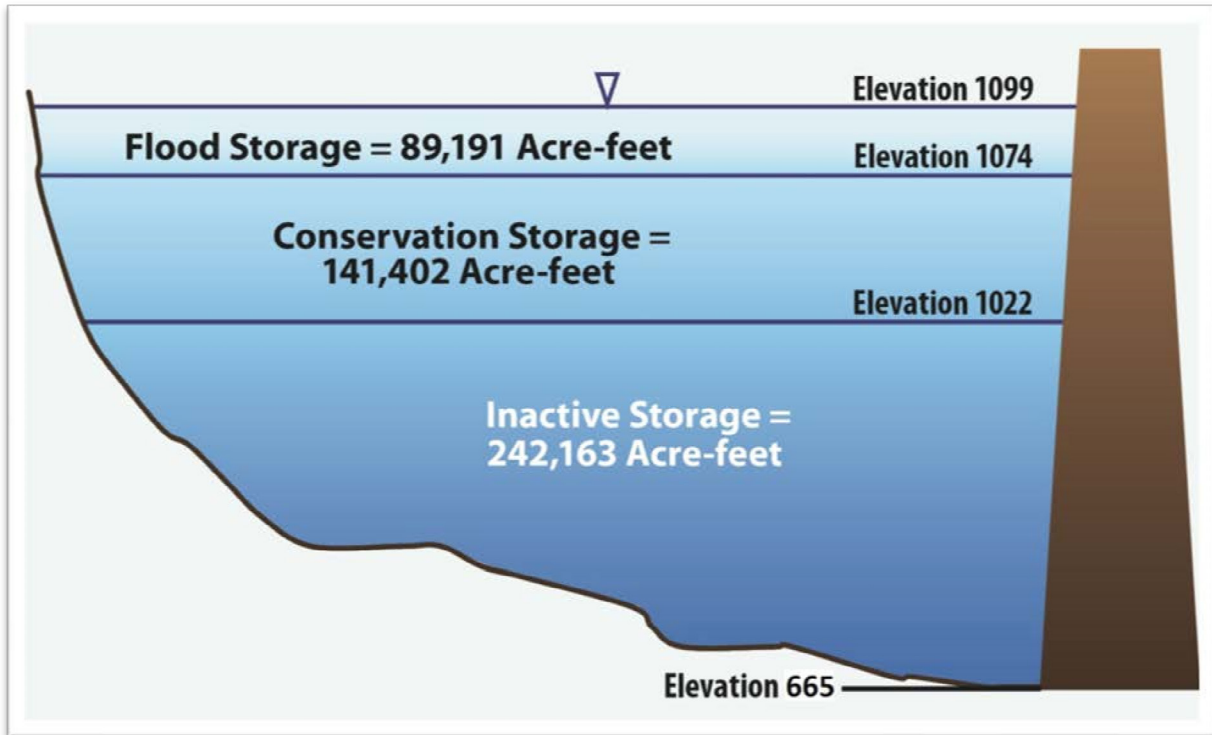


Figure 15. Storage in Carters Lake (excluding reregulation pool)

VIII – DROUGHT MANAGEMENT COORDINATION AND PROCEDURES

8-01. USACE Coordination. It is the responsibility of the Mobile District Water Management Section and APC to monitor climatological and hydrometeorological conditions at all times to make prudent water management decisions. The Water Management Section makes daily decisions and coordinates with APC every two weeks or more often if conditions warrant and with other district representatives from the various areas for which the river systems are operated -- hydropower, recreation, navigation, environmental, and others to exchange information concerning the operation of the river system. This coordination includes conducting weekly meetings with these other district elements. Daily water management decisions regarding water availability, lake level forecasts, and storage forecasts are determined using the information obtained along with current project and basin hydrometeorological data. A weekly District River System Status report is prepared that summarizes the conditions in each of the river basins. When conditions become evident that normal low flow conditions are worsening, the Water Management Section will elevate the district coordination to a heightened awareness. When drought conditions are imminent, Emergency Management representatives will be notified of the conditions and will be included in the regular coordination activities.

8-02. Interagency Coordination. The Water Management Section will support the environmental team regarding actions that require coordination with the U.S. Fish and Wildlife Service (USFWS) for monitoring threatened and endangered species and with the Environmental Protection Agency (EPA), Georgia Environmental Protection Division (GAEPD), and Alabama Department of Environmental Management (ADEM) regarding requests to lower minimum flow targets below Claiborne Dam.

8-03. Public Information and Coordination. When conditions determine that a change in the water control actions from normal regulation to drought regulation is imminent, it is important that various users of the system are notified so that any environmental or operational preparations can be completed prior to any impending reduction in reservoir discharges, river levels, and reservoir pool levels. In periods of severe drought within the ACT Basin it will be within the discretion of the Division Commander to approve the enactment of ACT Basin Water Management conference calls. The purposes of the calls are to share ongoing water management decisions with basin stakeholders and to receive stakeholder input regarding needs and potential impacts to users within the basin. Depending upon the severity of the drought conditions, the calls will be conducted at regular monthly or bi-weekly intervals. Should issues arise, more frequent calls would be implemented.

a. Local Press and Corps Bulletins. The local press consists of periodic publications in or near the ACT Basin. Montgomery, Columbus, and Atlanta have some of the larger daily papers. The papers often publish articles related to the rivers and streams. Their representatives have direct contact with the Corps through the Public Affairs Office. In addition, they can access the Corps Web pages for the latest project information. The Corps and the Mobile District publish e-newsletters regularly which are made available to the general public via email and postings on various websites. Complete, real-time information is available at the Mobile District's Water Management homepage <https://www.sam.usace.army.mil/Missions/Civil-Works/Water-Management/>. The Mobile District Public Affairs Office issues press releases as necessary to provide the public with information regarding Water Management issues and activities and also provides information via the Mobile District web site.

IX – REFERENCES

- Institute for Water Resources (IWR). 1991. National Study of Water Management During Drought A Research Assessment, U.S. Army Corps of Engineers, Water Resources Support Center, Institute for Water Resources, IWR Report 91-NDS-3.
- Institute for Water Resources (IWR). 1994. National Study of Water Management During Drought The Report to the U.S. Congress, U.S. Army Corps of Engineers, Water Resources Support Center, Institute for Water Resources, IWR Report 94-NDS-12.
- Institute for Water Resources (IWR). 1998. Water Supply Handbook, U.S. Army Corps, Water Resources Support Center, Institute for Water Resources, Revised IWR Report 96-PS-4.
- U.S. Army Corps of Engineers, (USACE). 1993. Development of Drought Contingency Plans, Washington, DC: CECW-EH-W Technical Letter No. 1110-2-335, (ETL 1110-2-335).
- U.S. Army Corps of Engineers, (USACE). January 2009. Western States Watershed Study: Drought.
- U. S. Geological Survey (USGS). 2000. *Droughts in Georgia*. Open-file report 00-380. U.S. Geological Survey, Atlanta, Georgia.

Intentionally left blank.

EXHIBIT G

EMERGENCY CONTACT INFORMATION

Emergency Contact Information


Alabama Power Company:

Reservoir Operations Supervisor	(205) 257-1401
Reservoir Operations Supervisor Alternate Daytime	(205) 257-4010
Reservoir Operations Supervisor After-Hours	(205) 257-4010

US Army Corps of Engineers:

Water Management Section	(251) 690-2737
Chief of Water Management	(251) 690-2730 or (251) 509-5368
H. Neely Henry Powerhouse	(256) 892-3172



PLATES

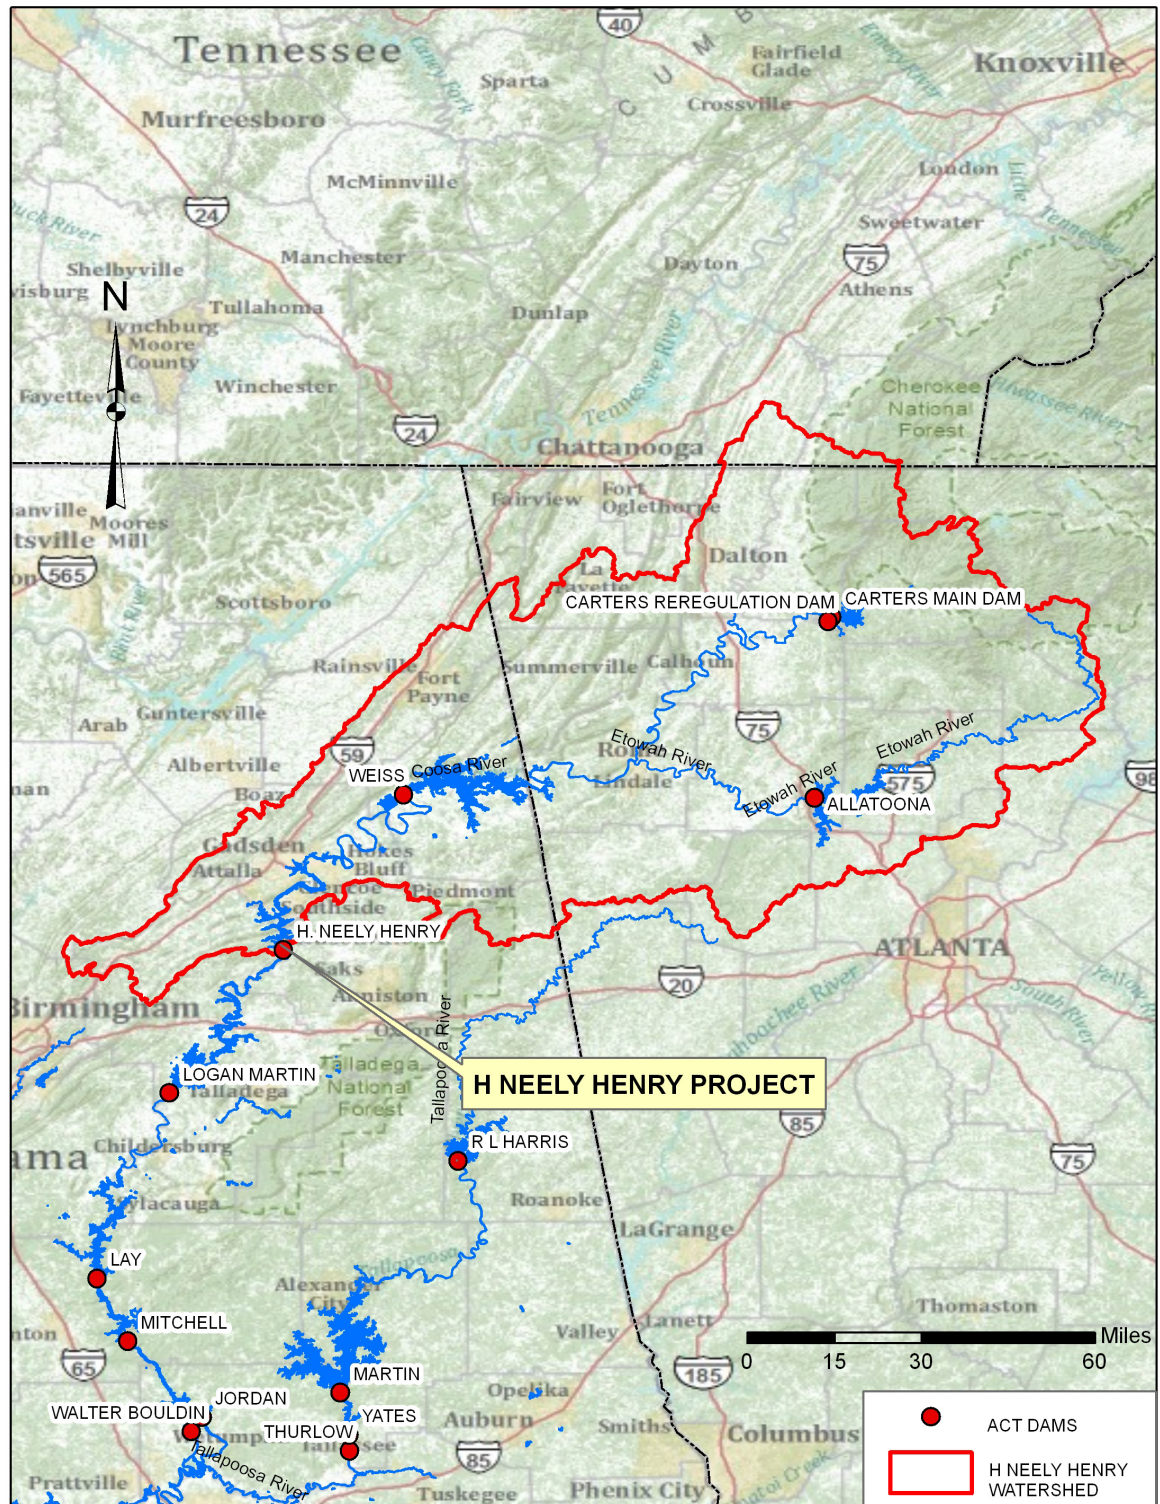



ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE


LOCATION MAP

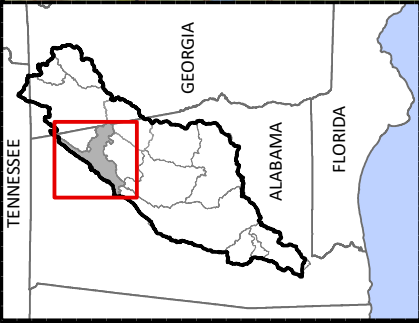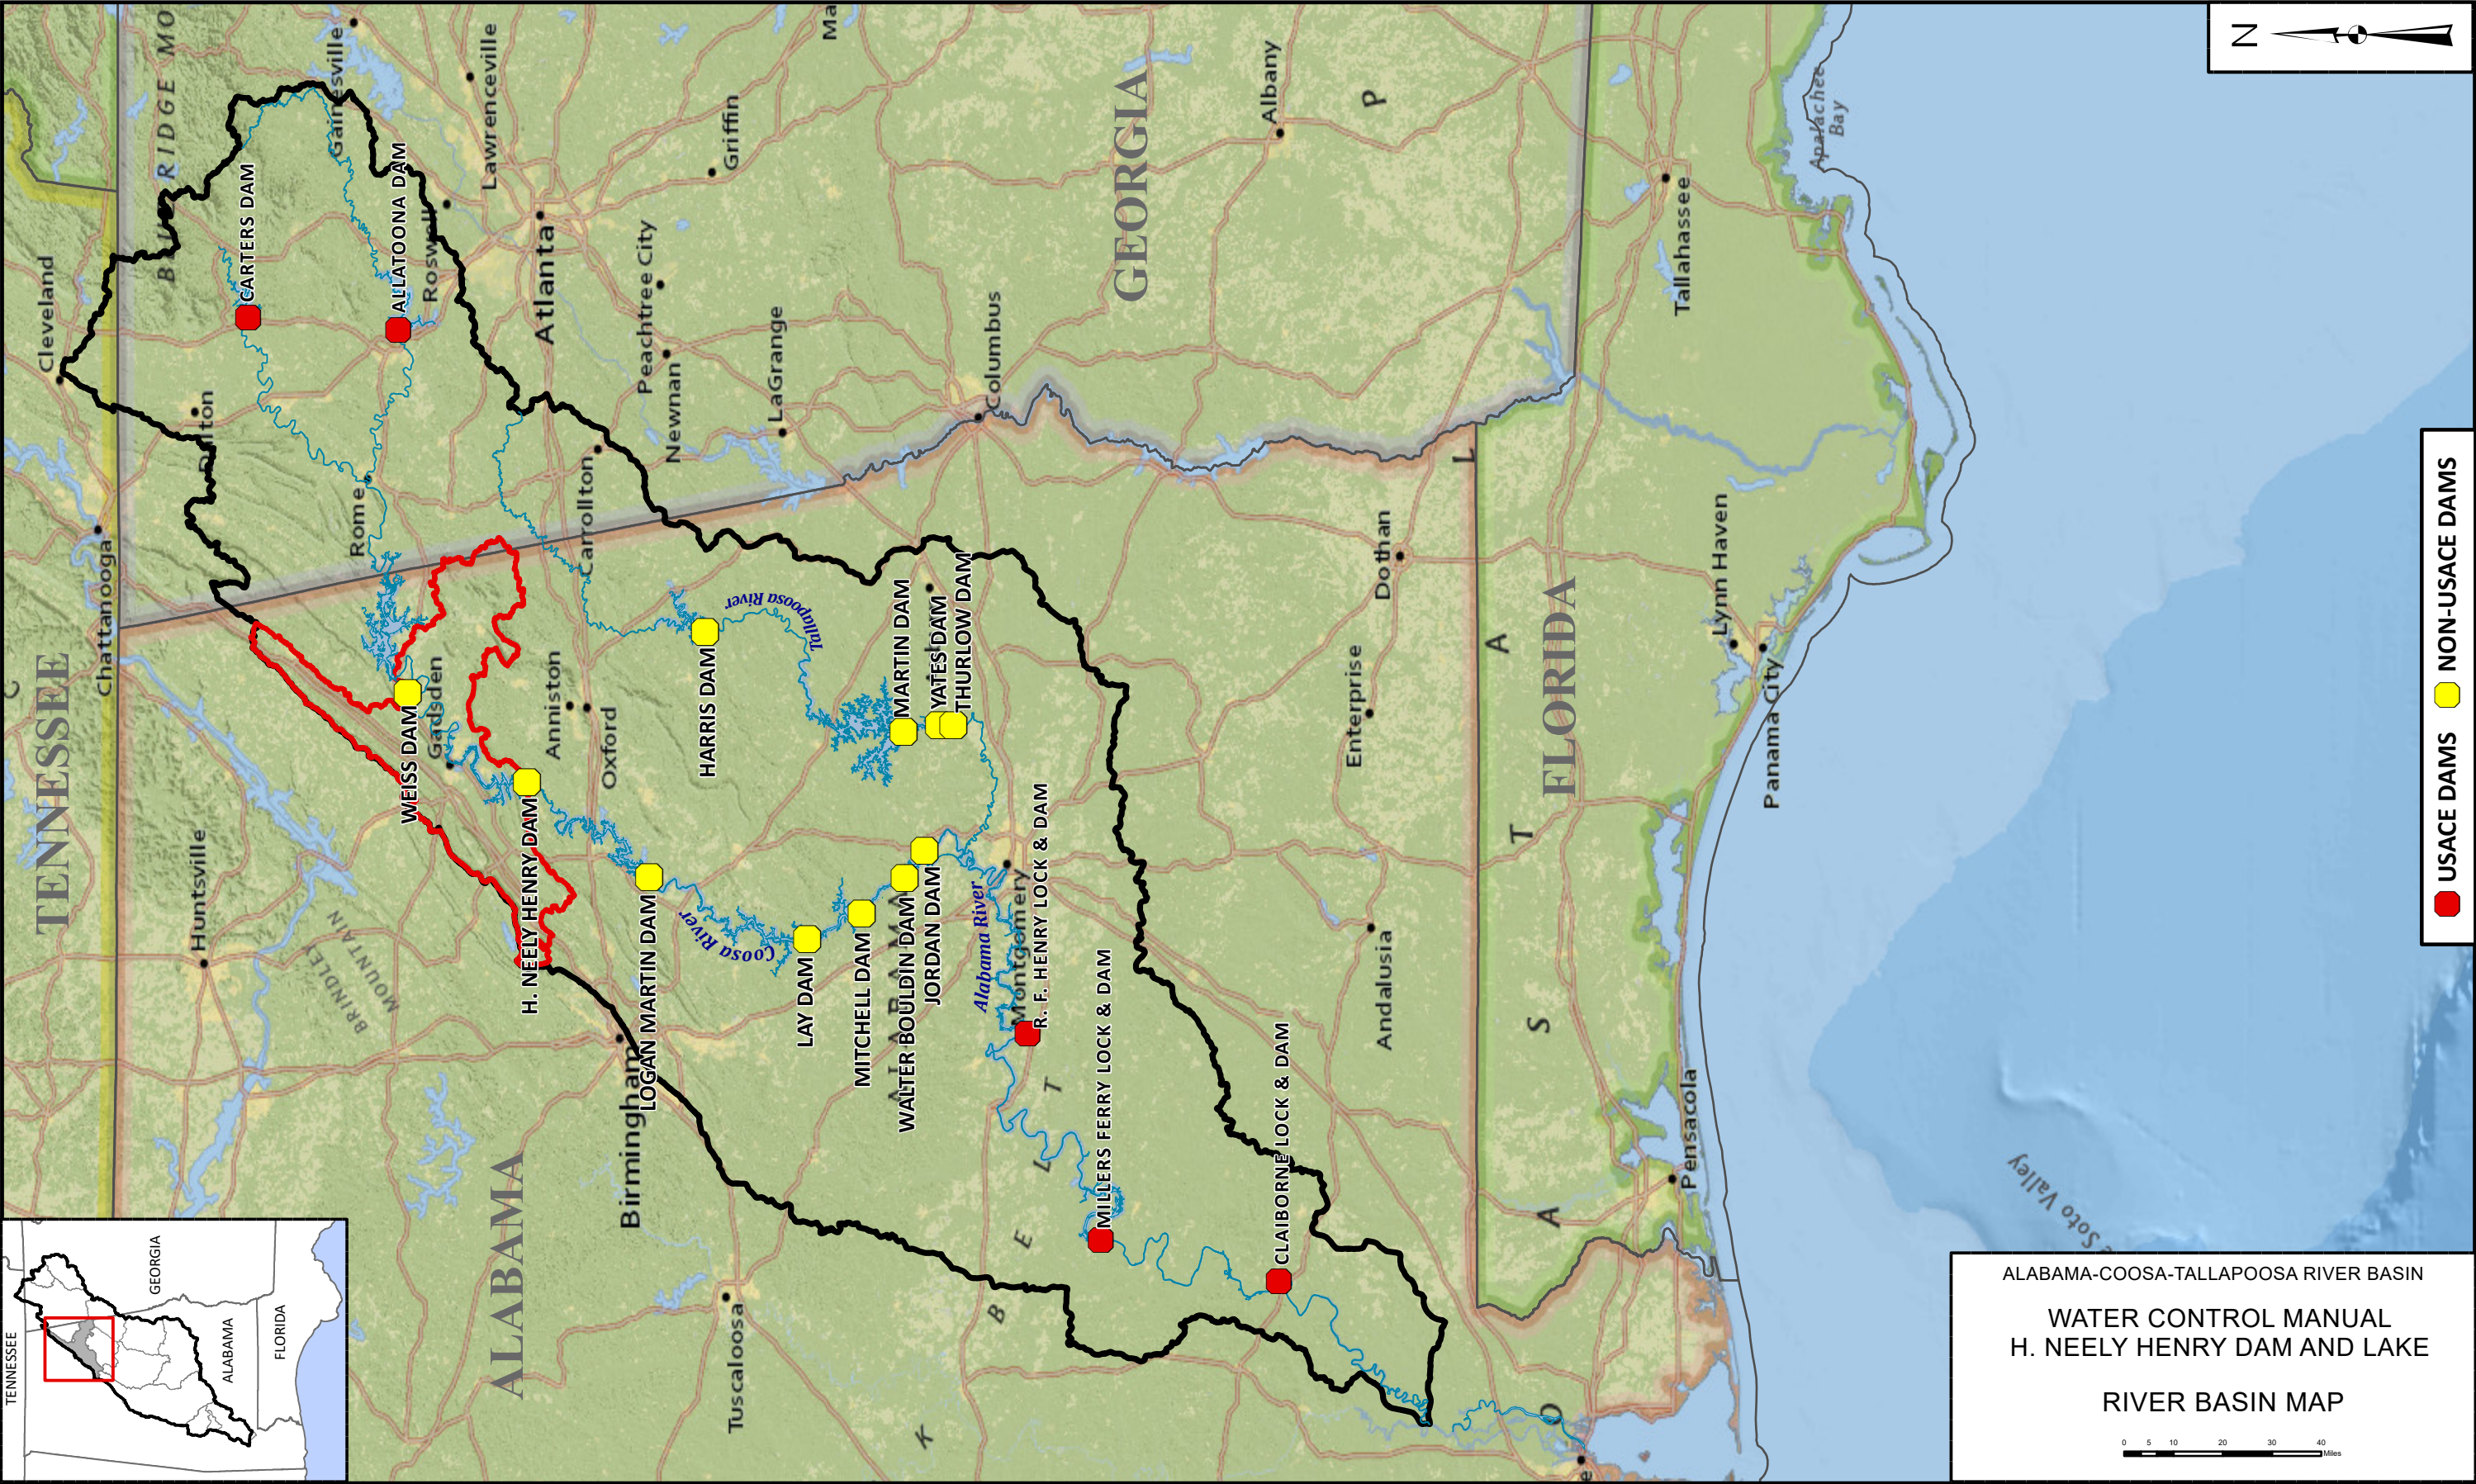

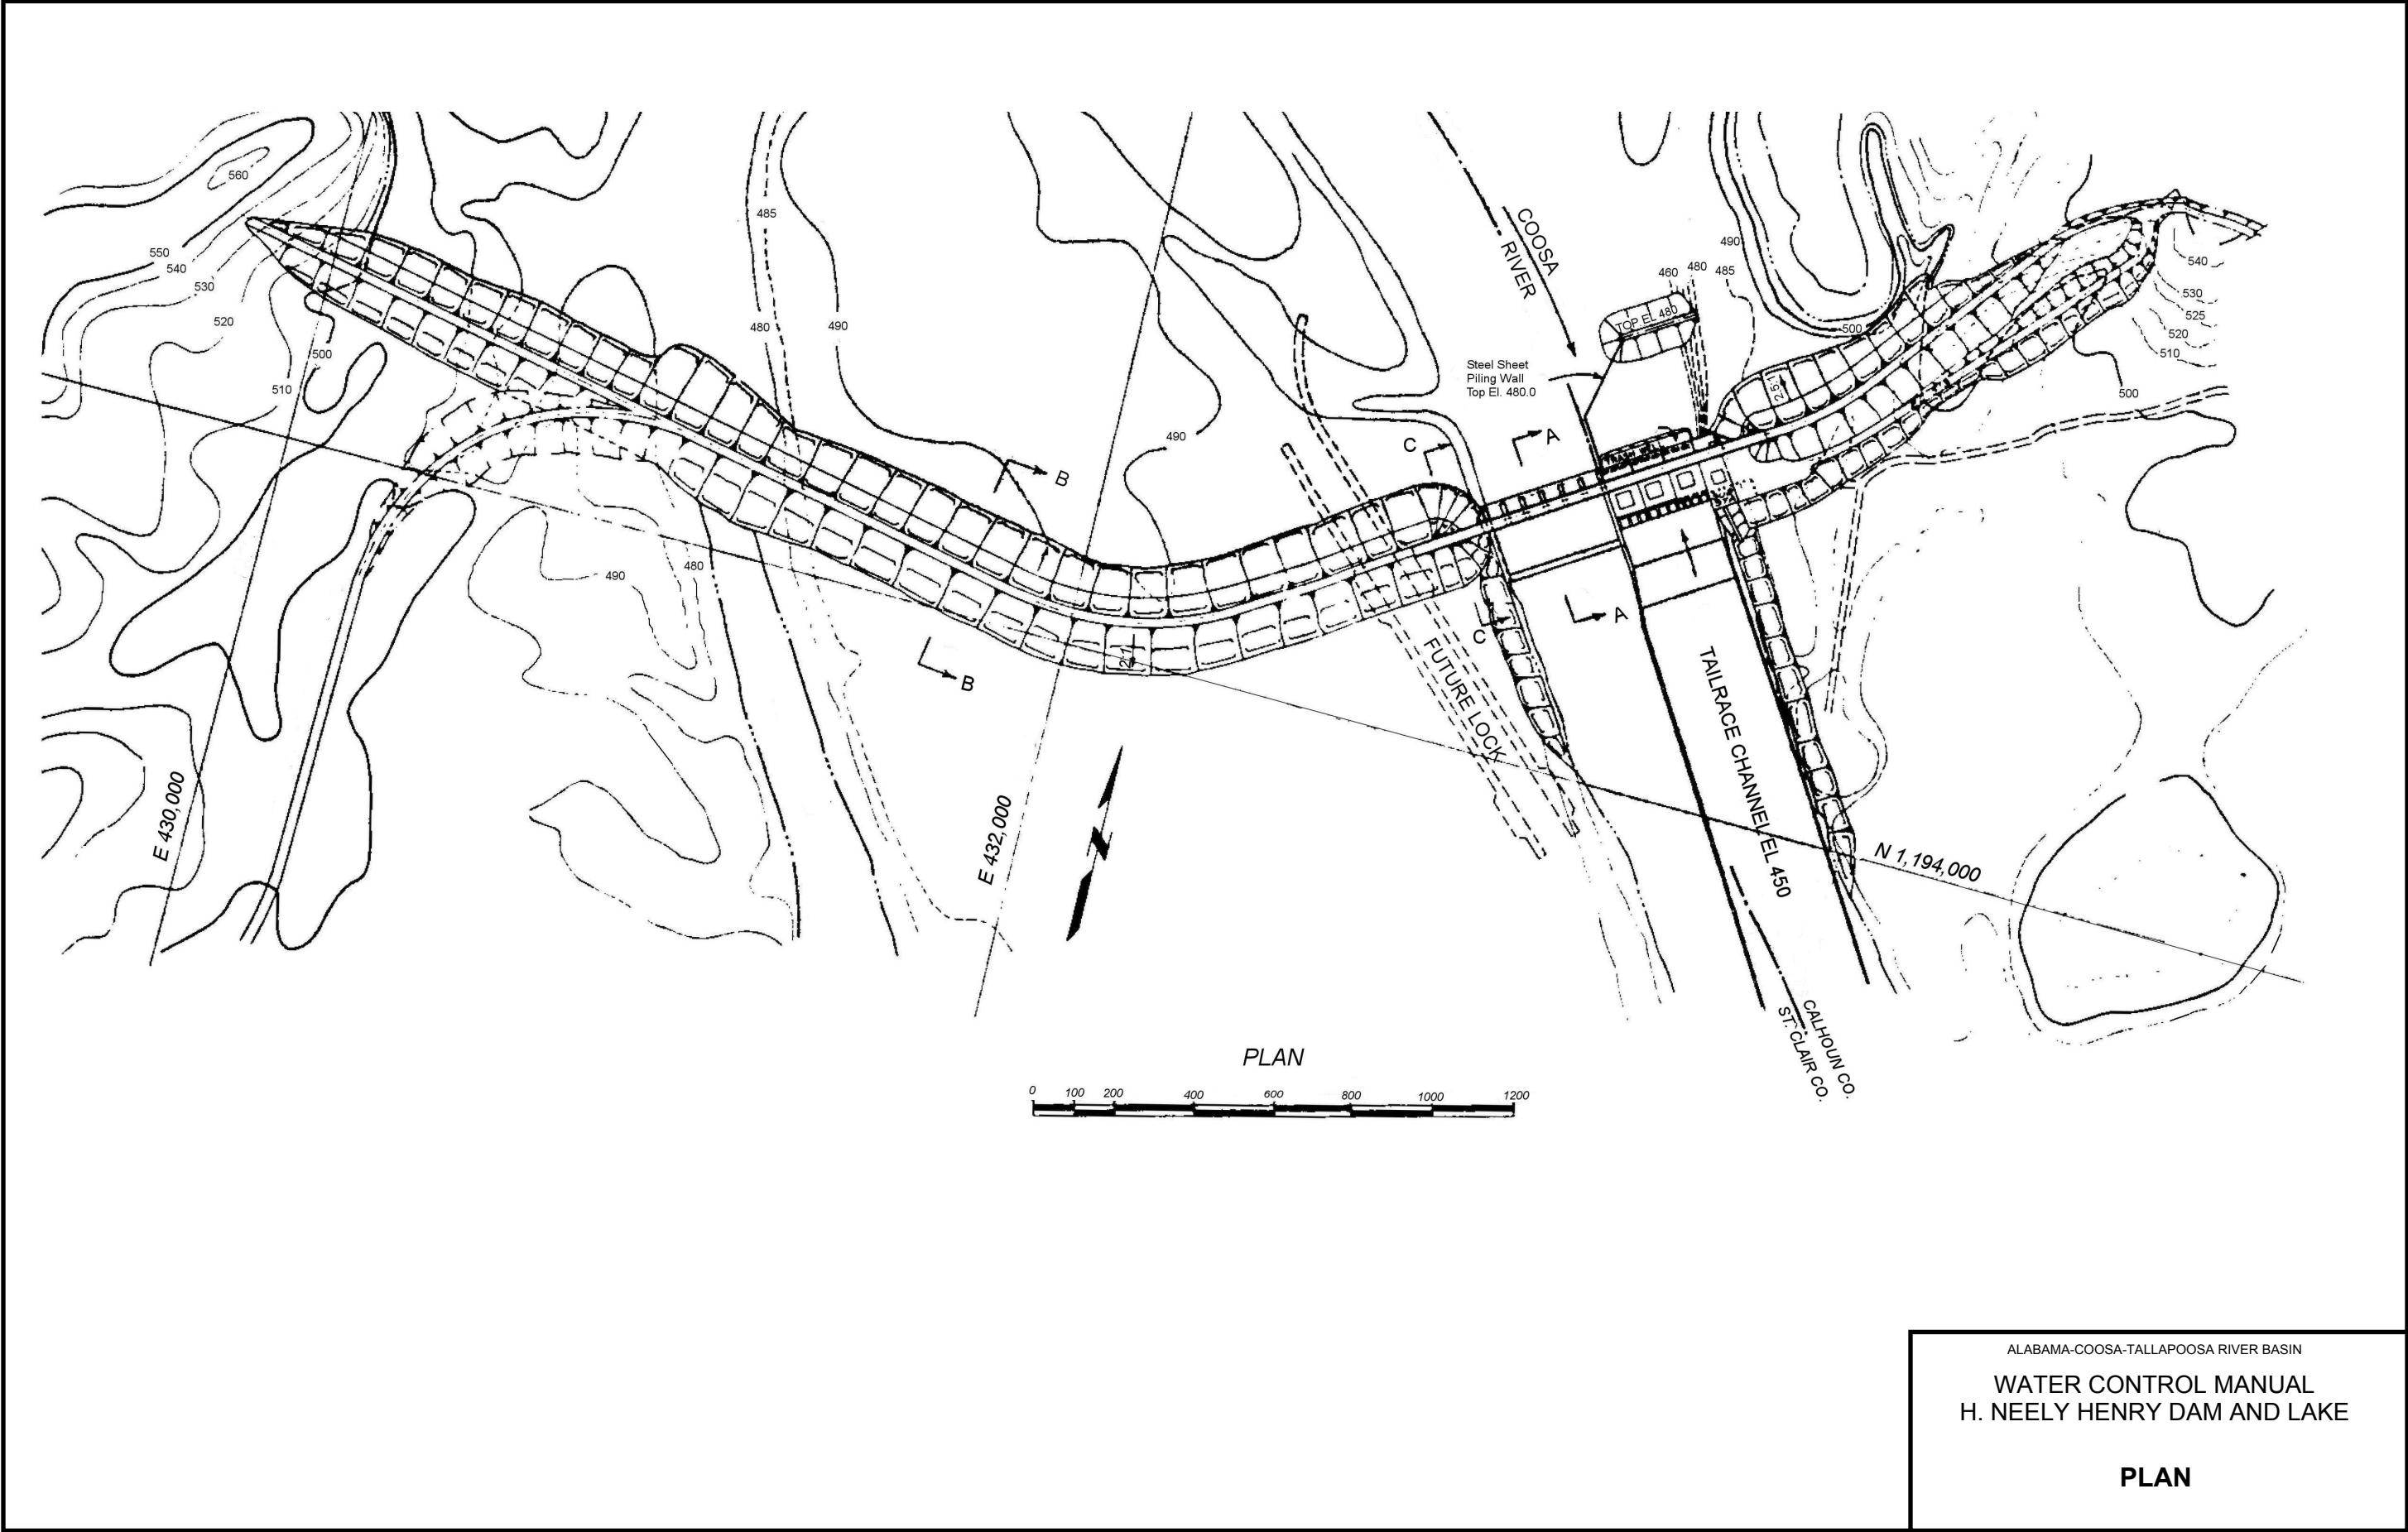


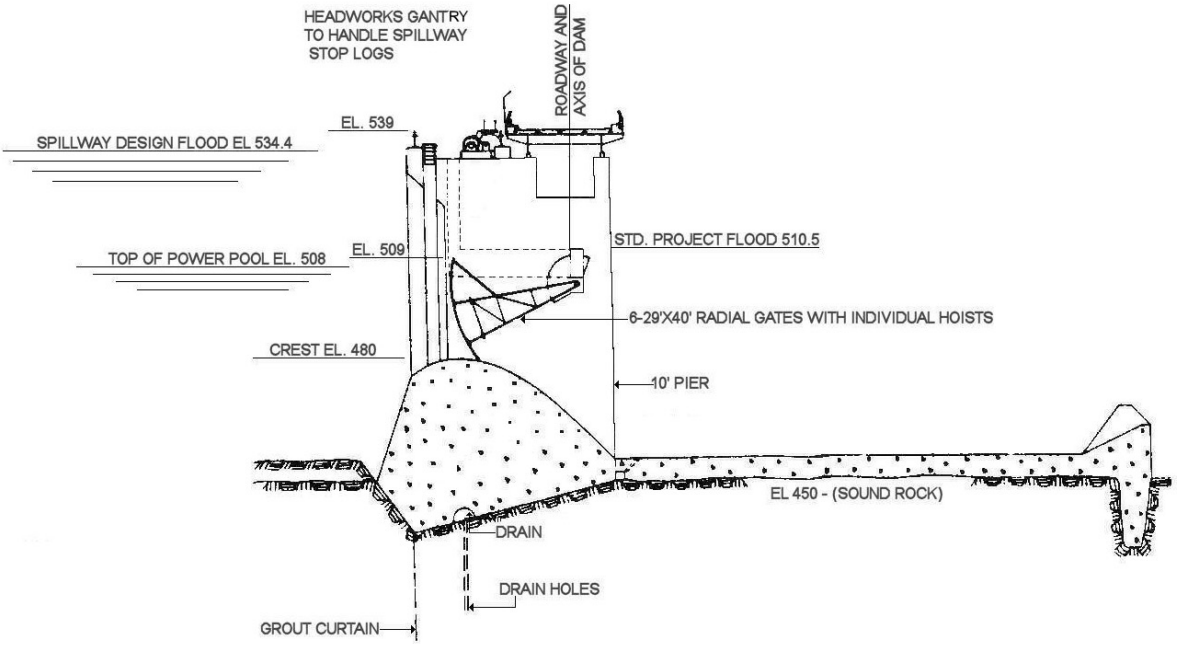


**SPILLWAY
SECTION A-A**

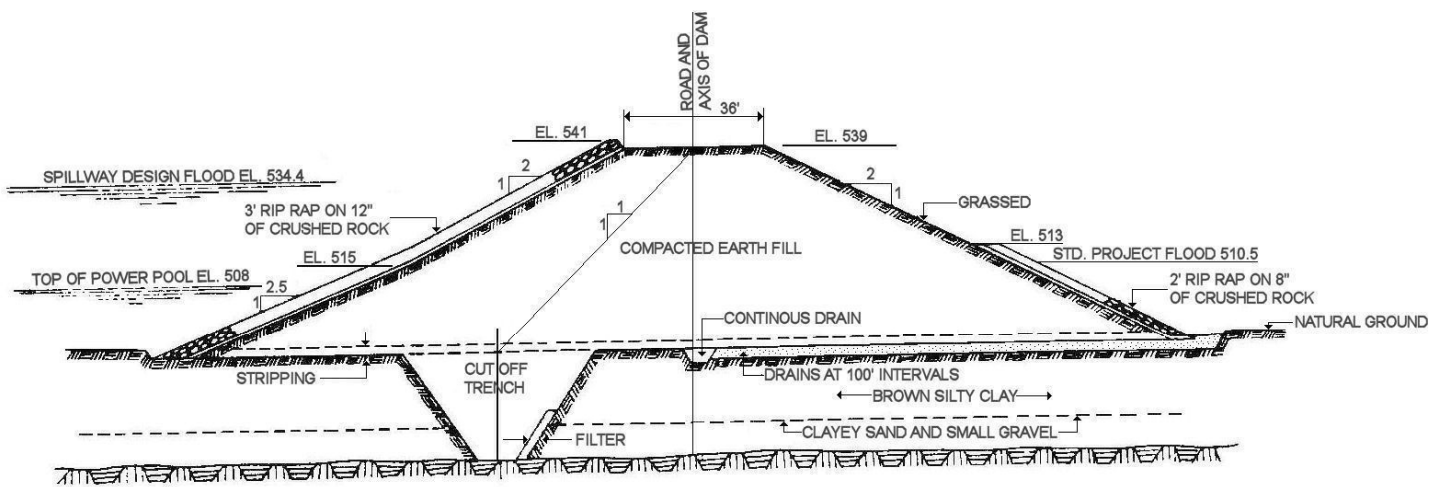

**EATH DIKE
SECTION B-B**

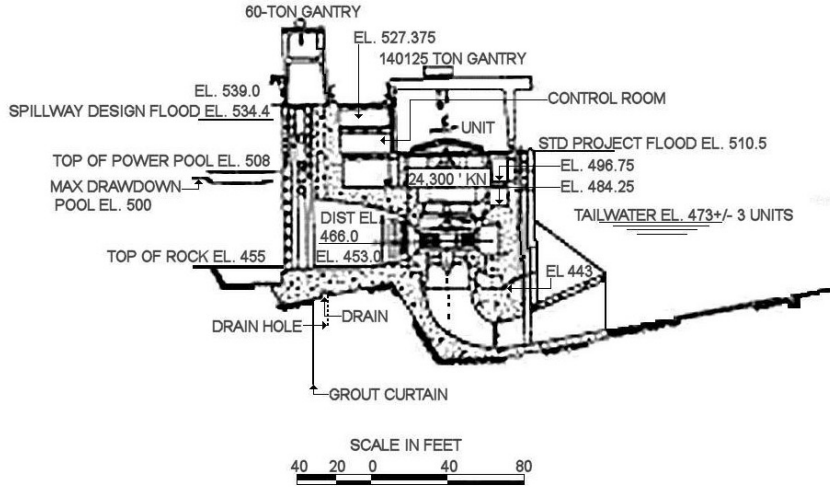


POWERHOUSE SECTION

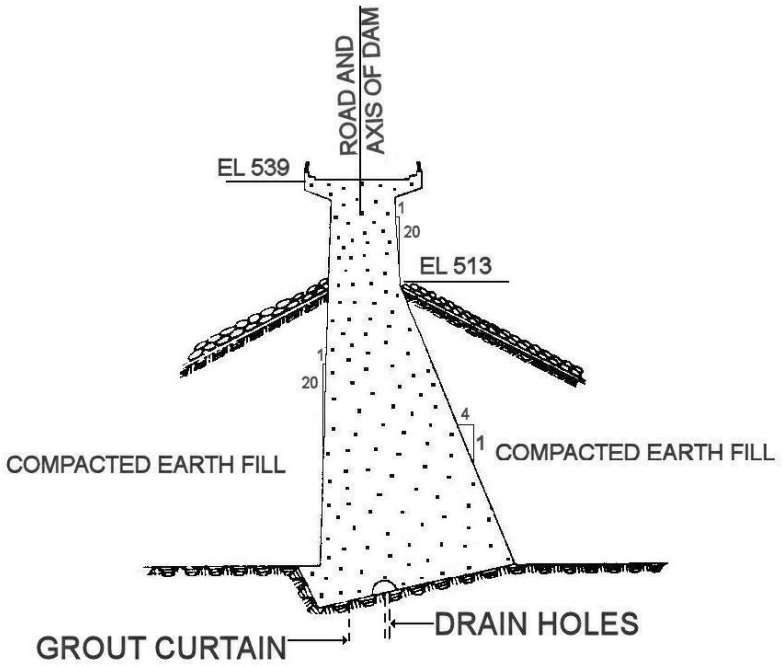

**NON-OVERFLOW
SECTION C-C**

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
ROBERT F. HENRY LOCK AND DAM AND
R.E. "BOB" WOODRUFF LAKE

SECTIONS

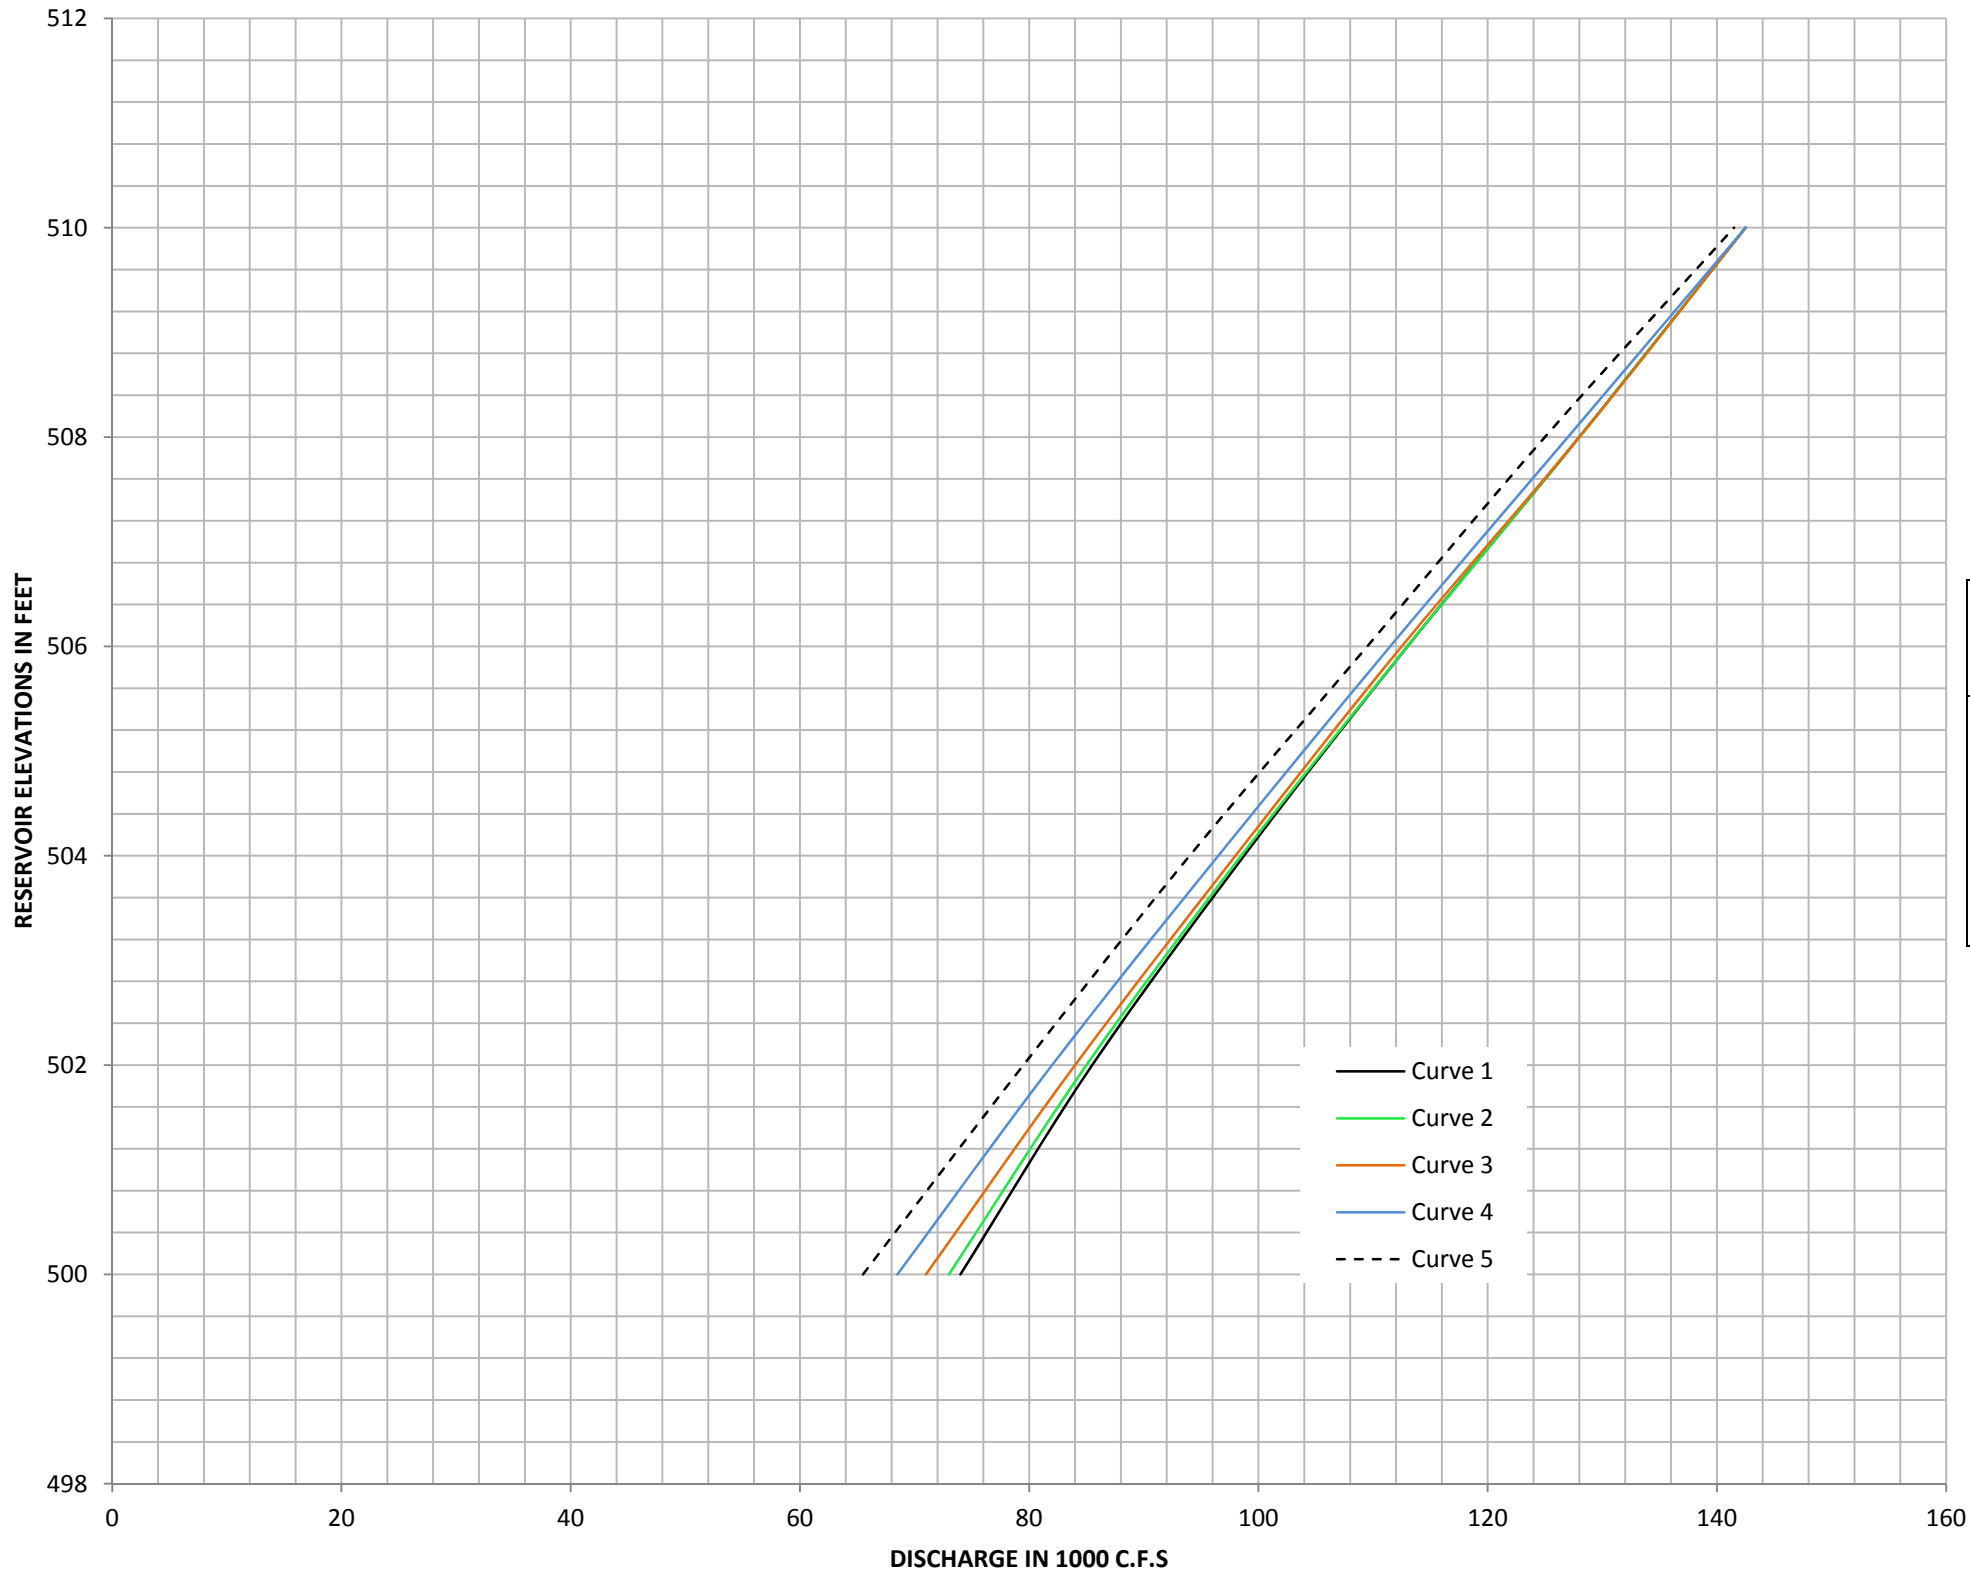

Elevation (ft NGVD 1929)	DISCHARGE in 1000 CFS				
	Curve1	Curve2	Curve3	Curve4	Curve5
500	74	73	71	68.5	65.5
502	85.5	85	84	82	79.5
504	98.75	98.5	98	96.5	94
506	113	113	112.5	111.5	109.5
508	128	128	128	127	125
510	142.5	142.5	142.5	142.5	141.5

NOTE: Spillway Crest Elevation 480
(Curve 1) Tailwater elevation at 488 or below, no submersion effect
(Curve 2) Tailwater elevation at 490
(Curve 3) Tailwater elevation at 492
(Curve 4) Tailwater elevation at 494
(Curve 5) Tailwater elevation at 496

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**FREE OVERFLOW SPILLWAY
RATING CURVES**

SIX GATE SPILLWAY DISCHARGE (CFS)								
Gate Opening Arc Dist (feet)	Headwater Elevation (feet NGVD29)							
	502	503	504	505	506	507	508	
0.0	0	0	0	0	0	0	0	
0.5	2700	2800	2800	2900	2900	3000	3000	(481)*
1.0	(481)*	5400	5500	5600	5700	5700	6000	6100
1.5		8100	8300	8400	8600	8800	9000	9100
2.0	(482)*	10800	11000	11300	11500	11700	12000	12200
2.5		13500	13800	14100	14400	14700	15000	15300
3.0	(483)*	16100	16500	16900	17300	17600	18000	18300
3.5		18800	19300	19700	20100	20600	21000	21400
4.0	(484)*	21500	22000	22500	23000	23500	24000	24400
4.5		24100	24700	25300	25900	26400	27000	27500
5.0		26700	27400	28100	28700	29300	29900	30500
5.5	(485)*	29400	30100	30800	31500	32200	32900	33600
6.0		32000	32800	33600	34300	35100	35900	36600
6.5	(486)*	34500	35400	36300	37200	38000	38800	39600
7.0		37100	38100	39000	39900	40900	41700	42600
7.5		39600	40700	41700	42700	43700	44700	45600
8.0	(487)*	42100	43300	44400	45500	46500	47500	48600
8.5		44600	45800	47000	48200	49300	50400	51500
9.0		47100	48400	49700	50900	52100	53300	54400
9.5	(488)*	49500	50900	52300	53600	54900	56100	57300
10.0		51900	53400	54800	56200	57600	58900	60200
10.5	(489)*	54300	55800	57400	58800	60300	61700	63100
11.0		56600	58200	59900	61400	63000	64400	65900
11.5		58900	60600	62300	64000	65600	67200	68700
12.0		61100	63000	64800	66500	68200	69900	71500
12.5	(490)*	63300	65300	67200	69000	70800	72500	74200
13.0		65500	67500	69500	71400	73300	75100	76900
13.5		67600	69700	71900	73800	75800	77700	79600
14.0	(491)*	69700	71900	74100	76200	78300	80300	82300
14.5		71800	74100	76400	78600	80700	82800	84900
15.0		73800	76200	78600	80900	83100	85300	87400
15.5		75700	78200	80700	83100	85500	87700	90000
16.0	(492)*	77600	80200	82900	85300	87800	90100	92500
16.5		79500	82200	84900	87500	90100	92500	94900
17.0		81300	84100	87000	89600	92300	94800	97300
17.5		83100	86200	88900	91700	94500	97100	99700
18.0 **		85000	88000	90900	93700	96600	99300	102000


* Tailwater elevation at which submergence begins.

** Gates not fully open.

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE


**PARTIAL OPENING GATED
SPILLWAY DISCHARGE RATING**

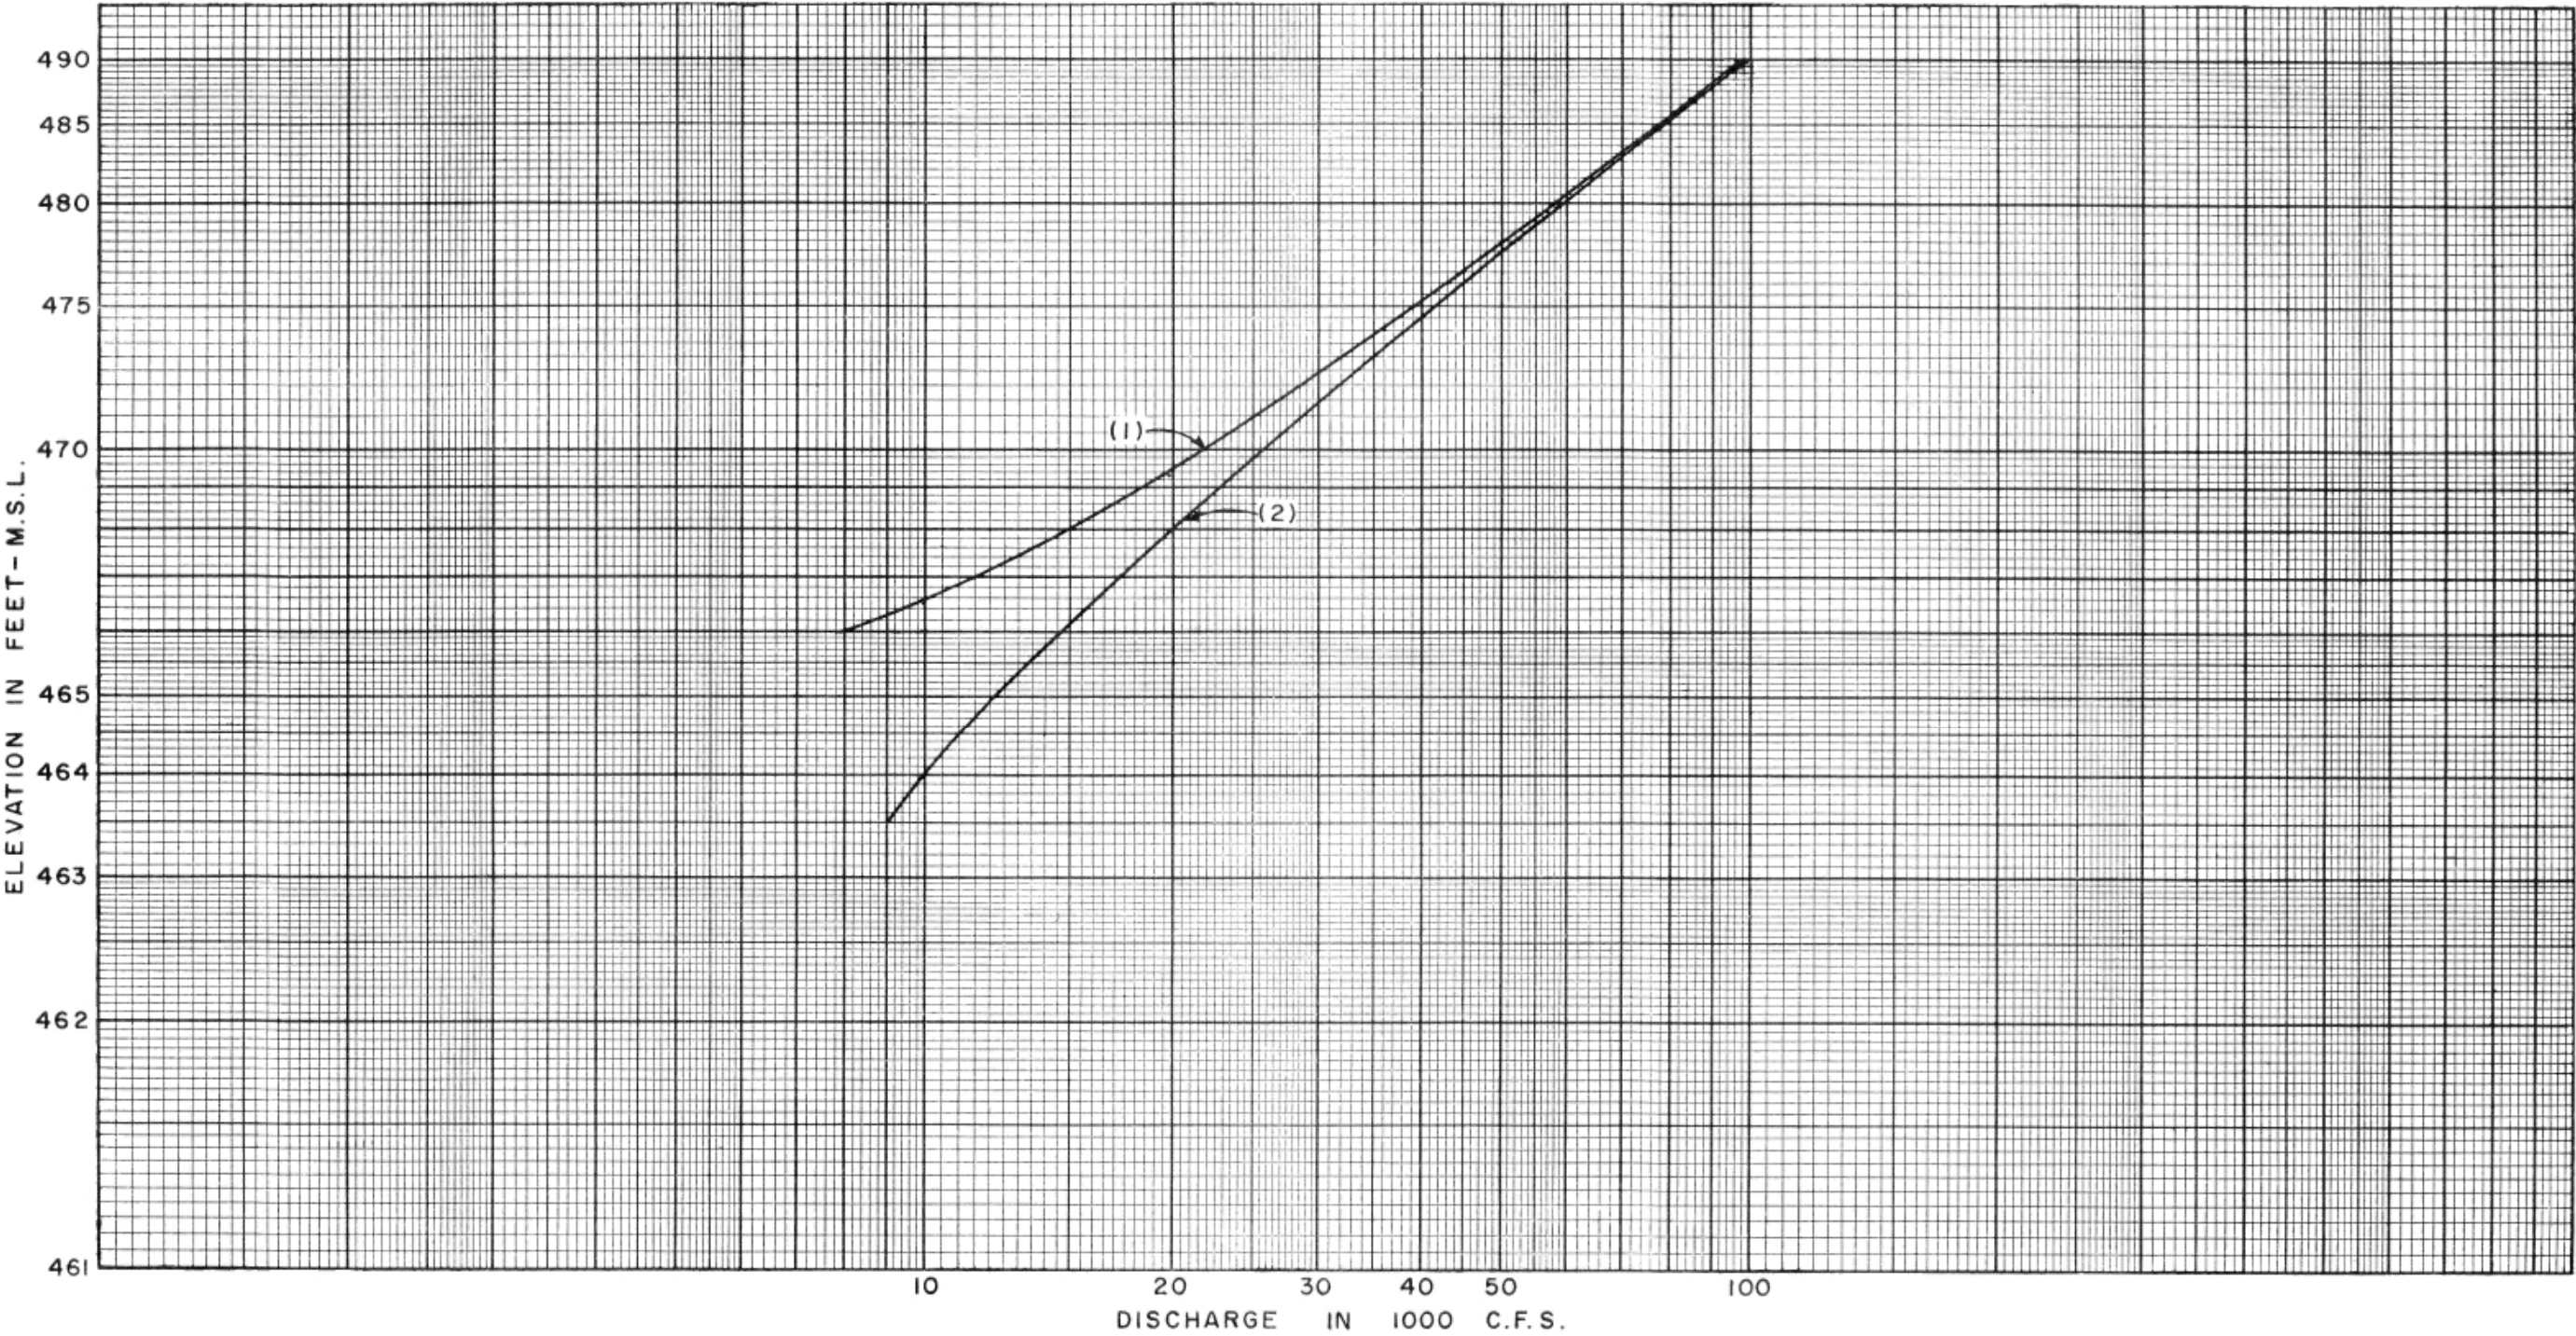

(1) LOGAN MARTIN RESERVOIR AT ELEV. 465
(2) LOGAN MARTIN RESERVOIR AT ELEV. 460


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
TAILWATER RATING CURVES

Pool Elev (ft NGVD29)	Total Area (ac)	Total Storage (ac-ft)
500	6182	52626
501	6701	59067
502	7253	66043
503	7830	73582
504	8439	81712
505	9081	90469
506	9760	99887
507	10477	110001
508	11235	120853
509	12040	132488
510	12901	144948
511	13841	158317
511.5	14327	165360
520	24564	328402
521	26239	354017
522	28028	381276
523	29940	410287
524	31982	441164
525	34163	474039
526	36493	509055
527	38982	546369
528	41640	586156
529	44480	628601
530	47514	673913.96

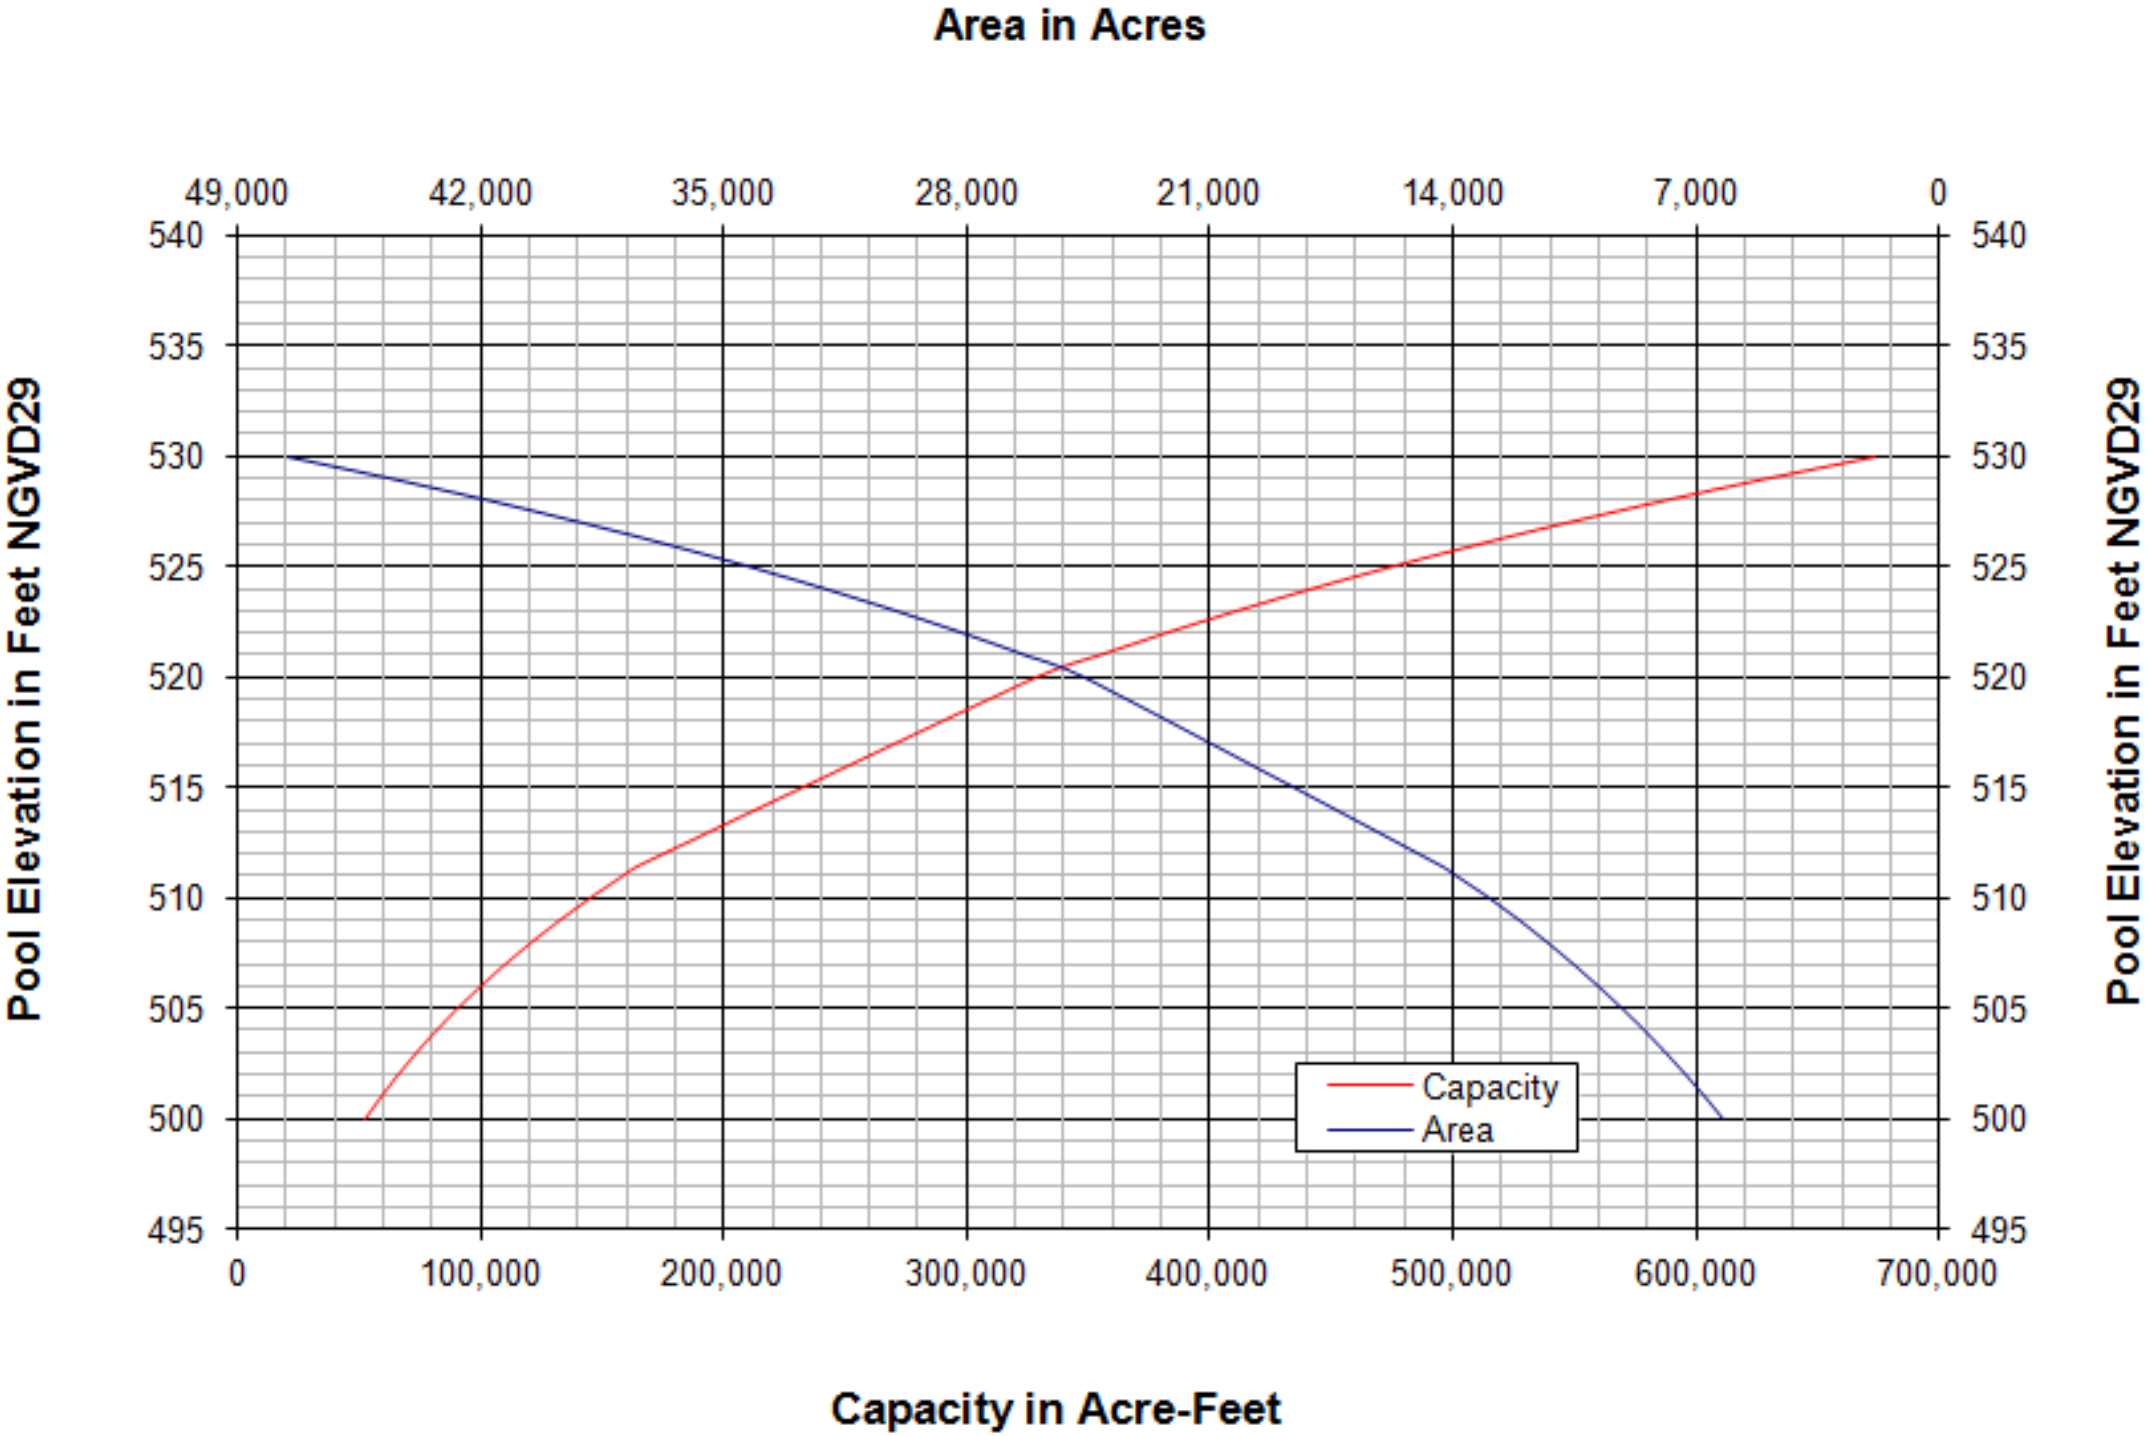


- ¹ Top of flood control
- ² Top of conservation
- ³ Minimum conservation
- ⁴ Spillway crest elevation
- ⁵ Top of gates – closed position

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
AREA-CAPACITY CURVES

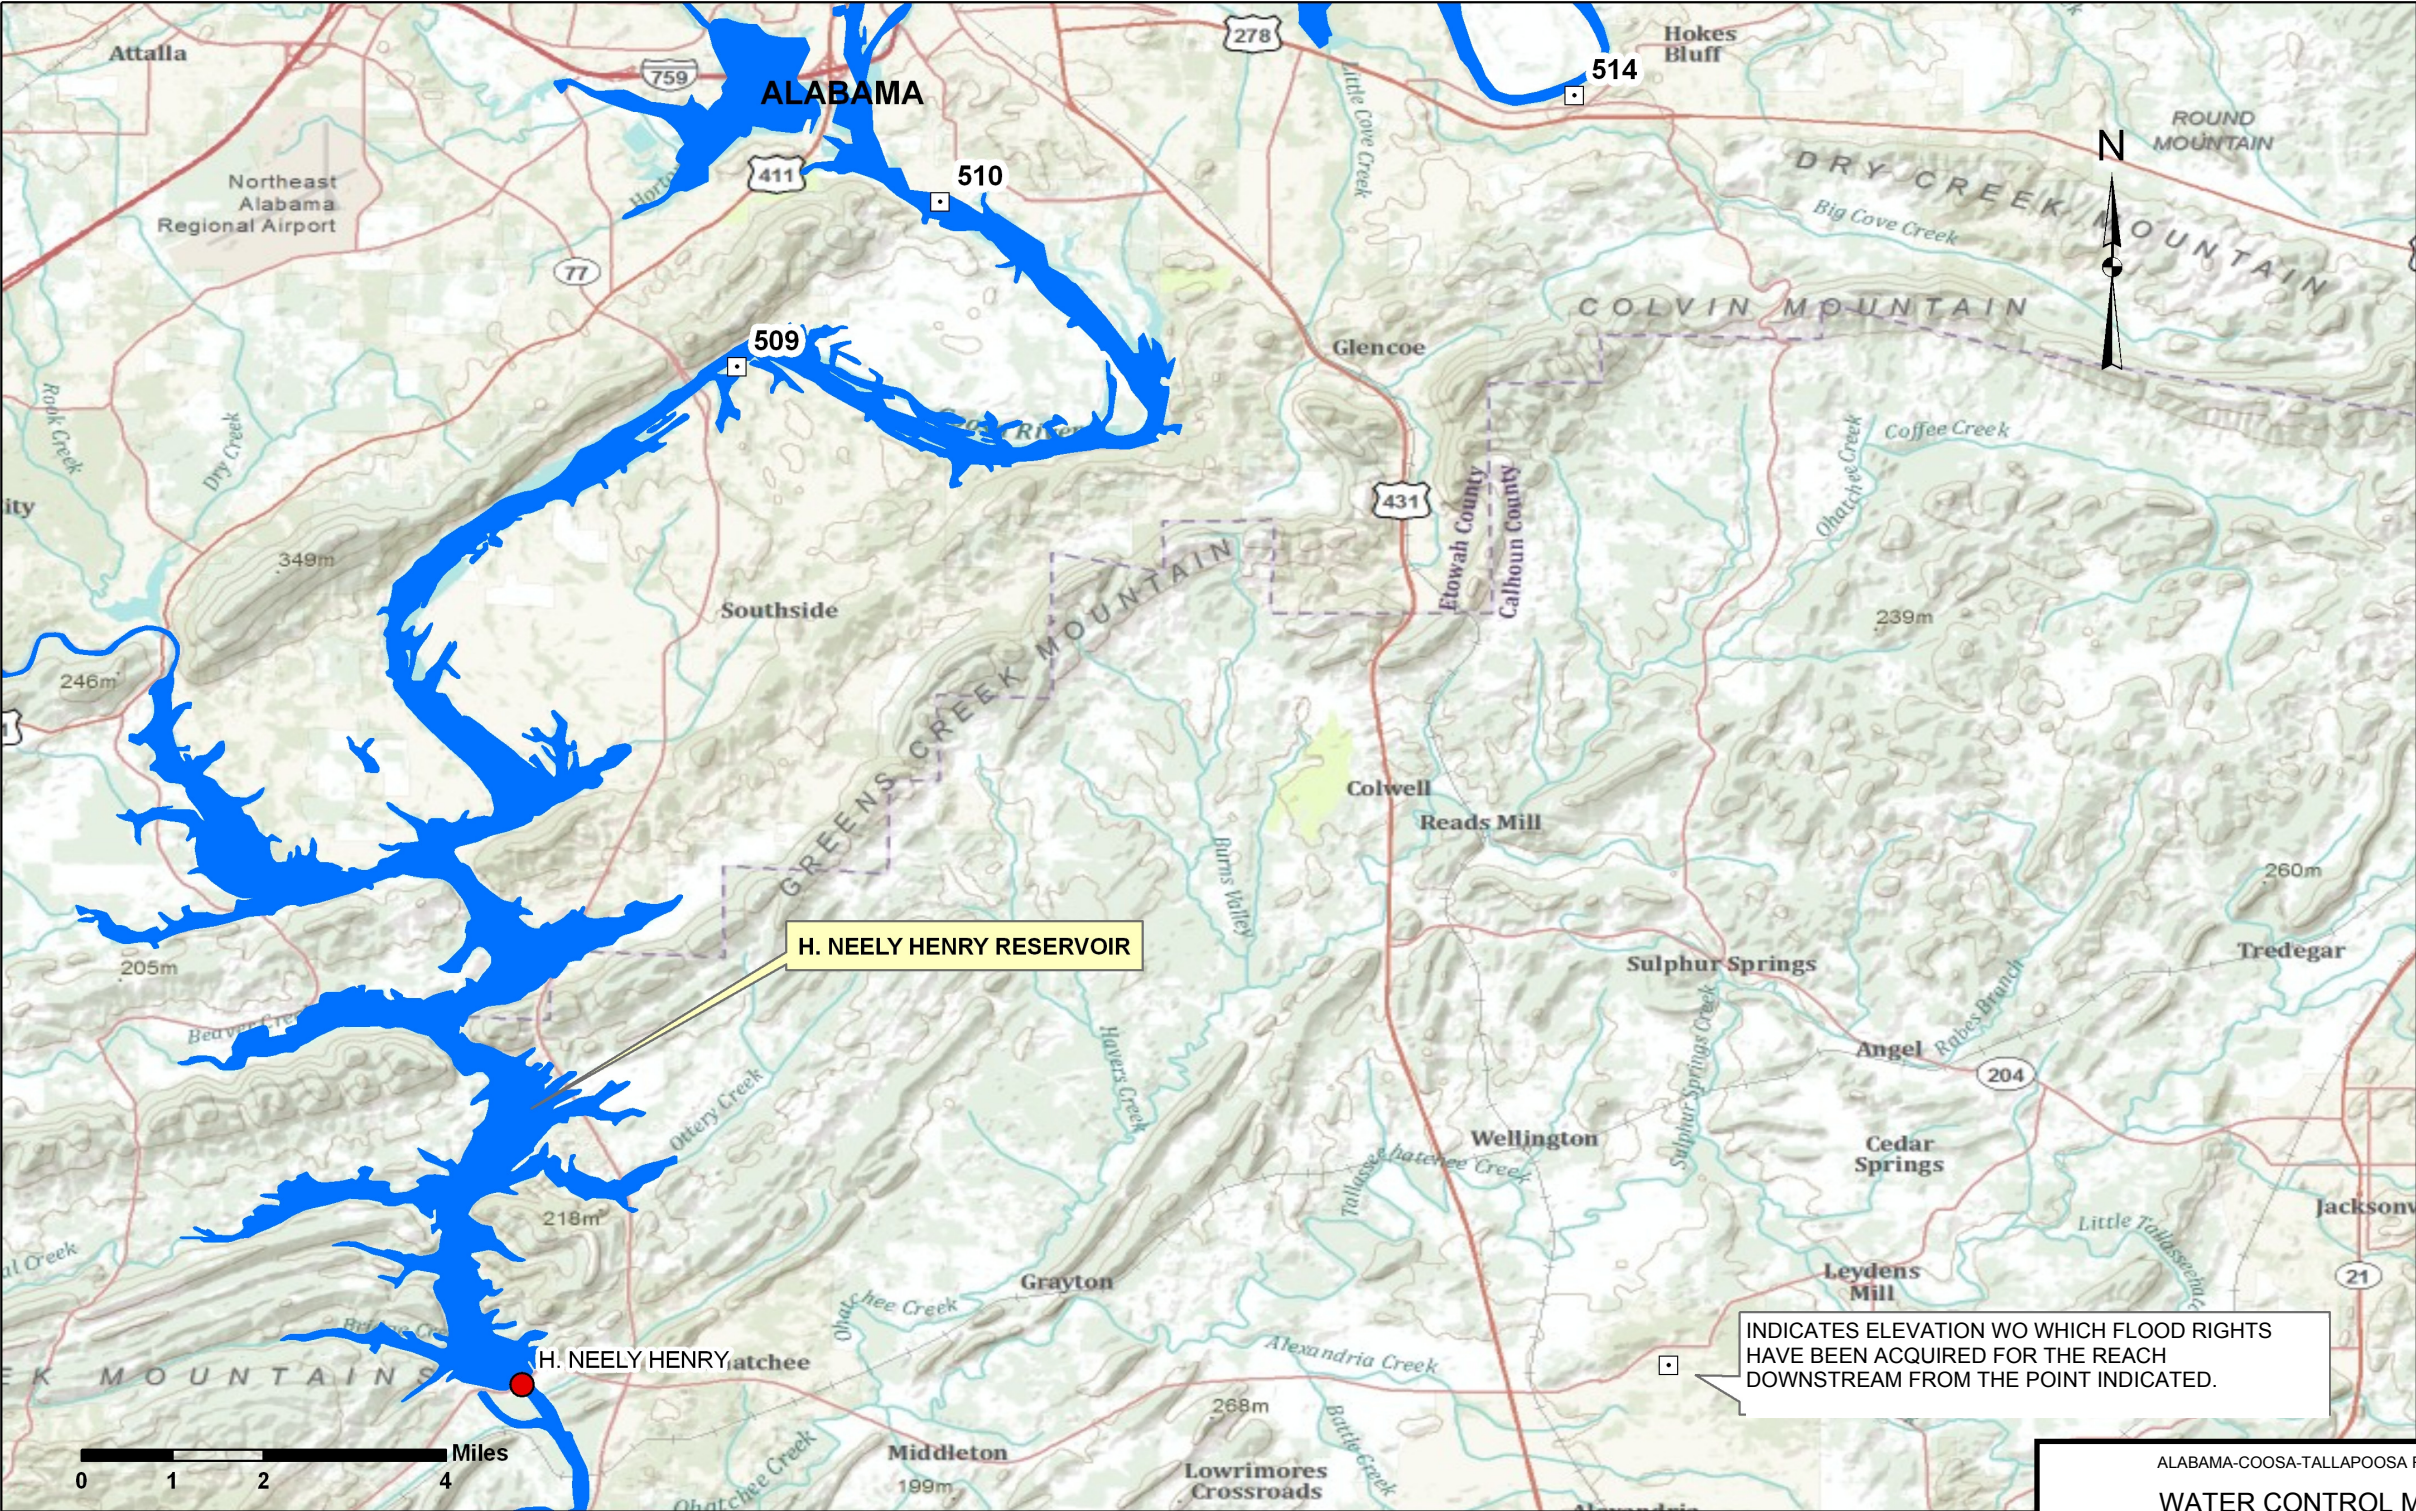


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
REAL ESTATE ACQUISITION LIMITS

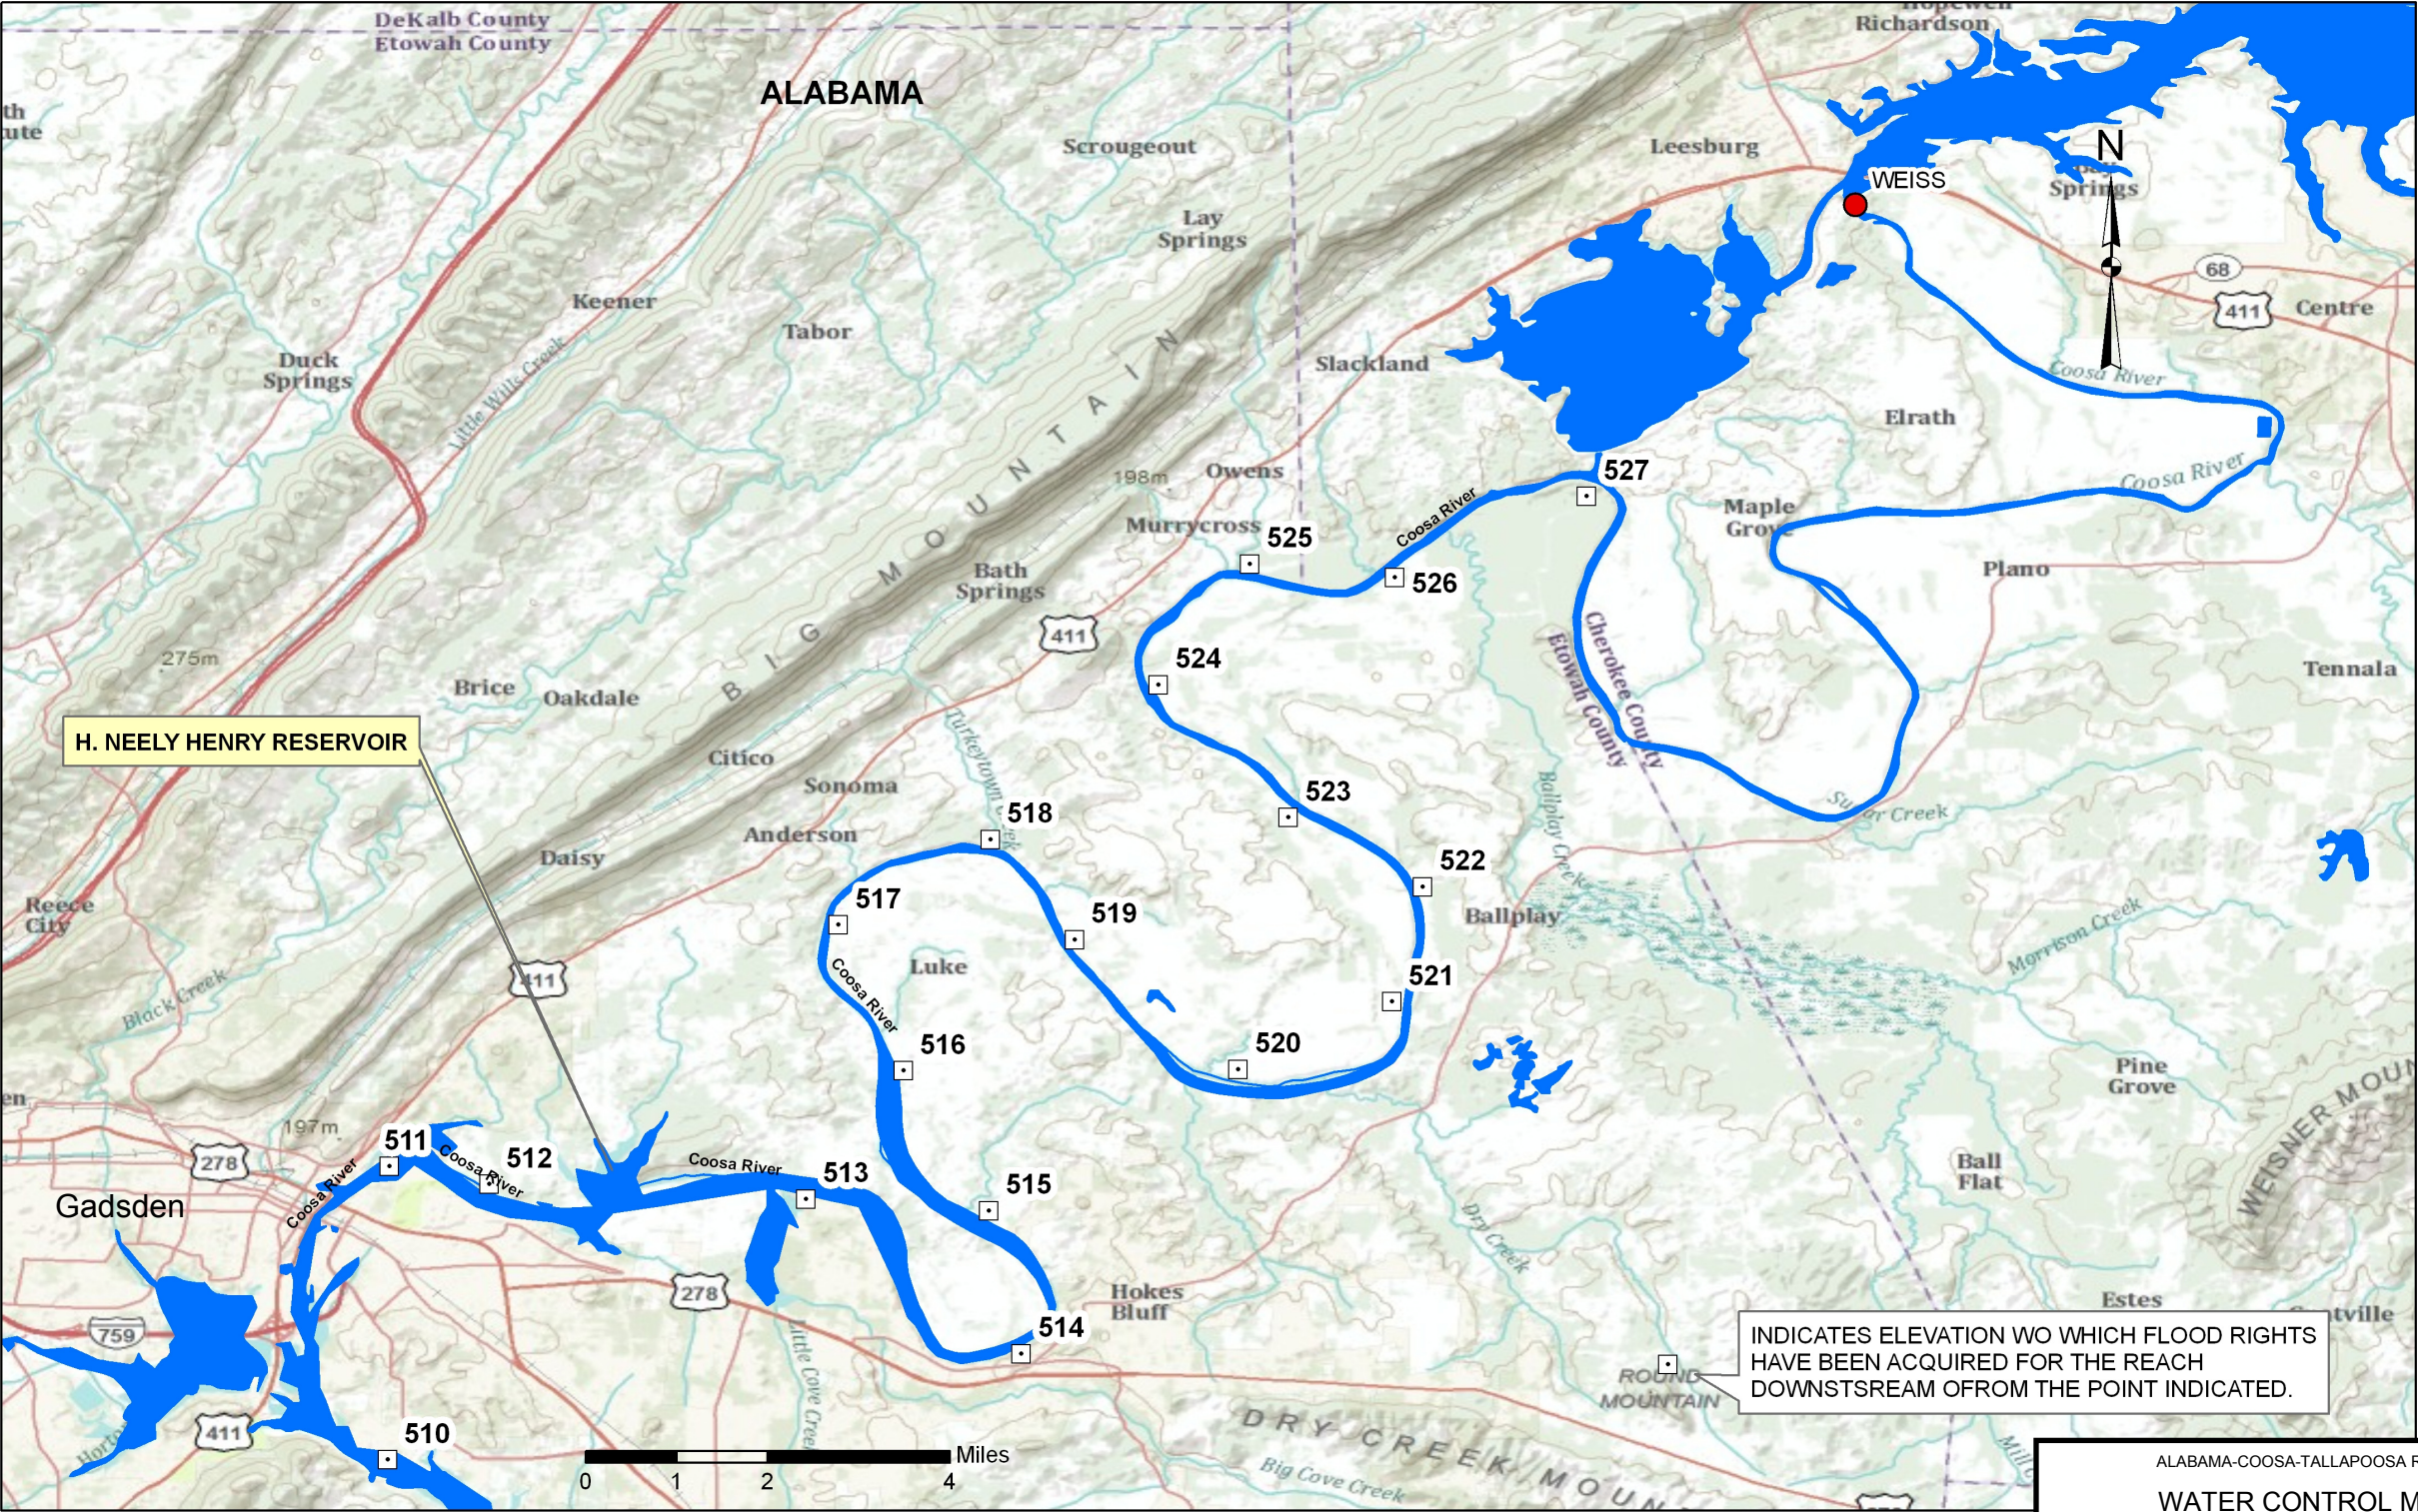


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
REAL ESTATE ACQUISITION LIMITS


H. NEELY HENRY RESERVOIR

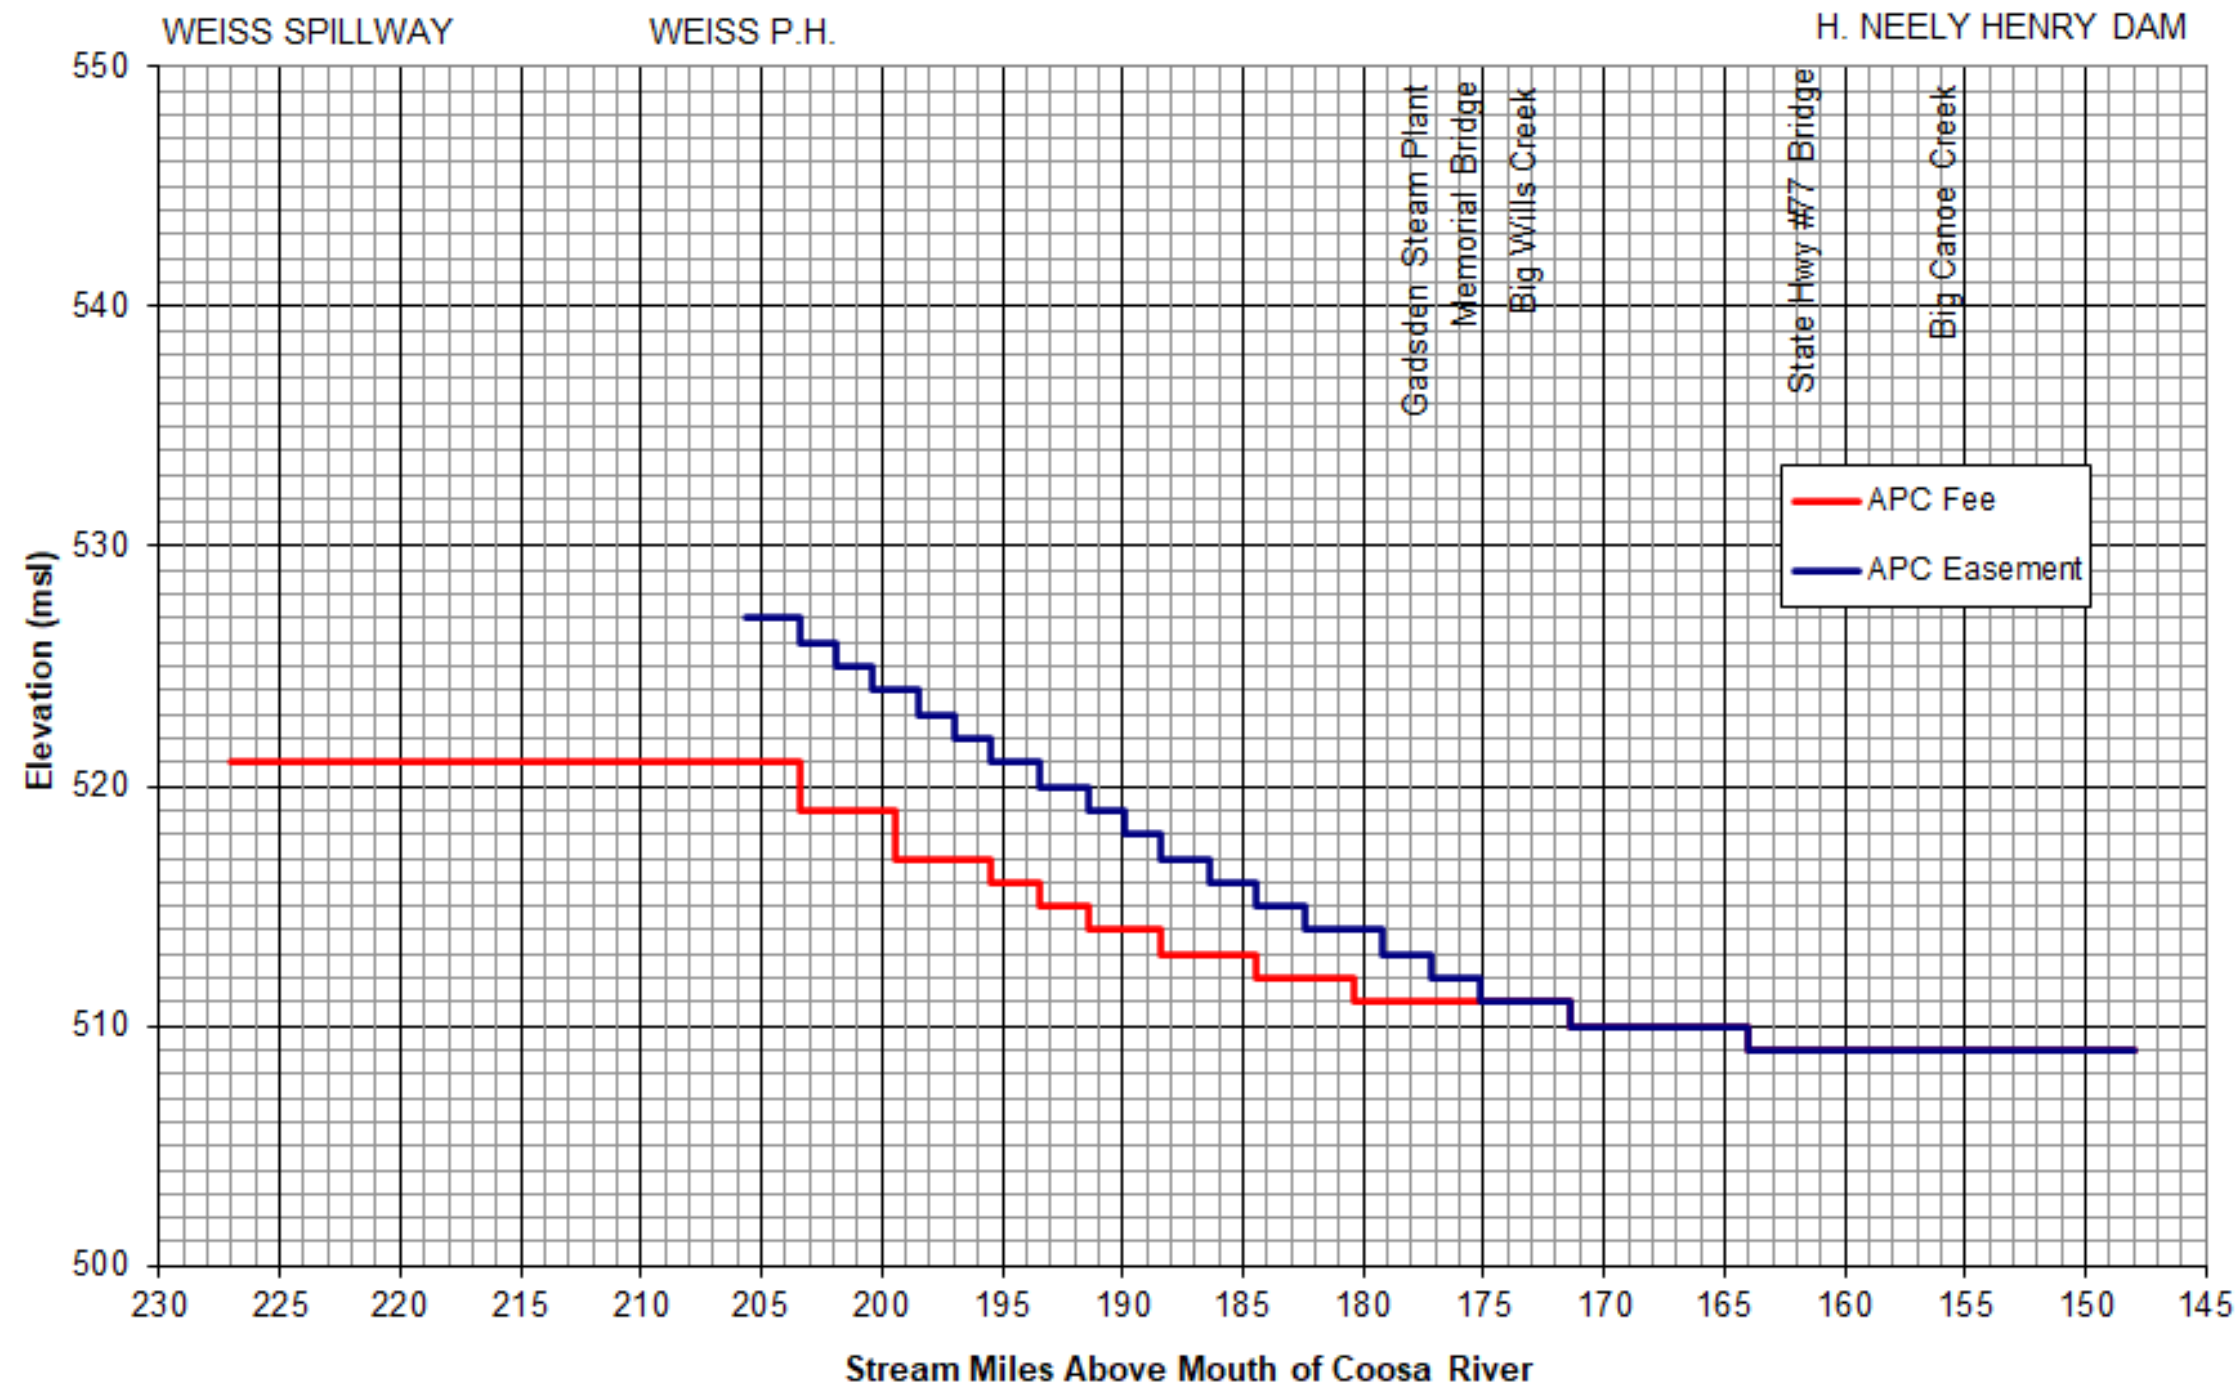

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
APC EASEMENT ACQUISITION LIMITS

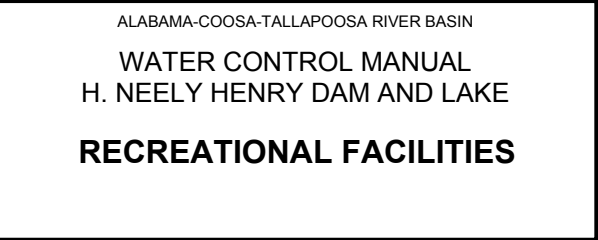


TURBOGENERATOR UNIT 1 PERFORMANCE CURVES

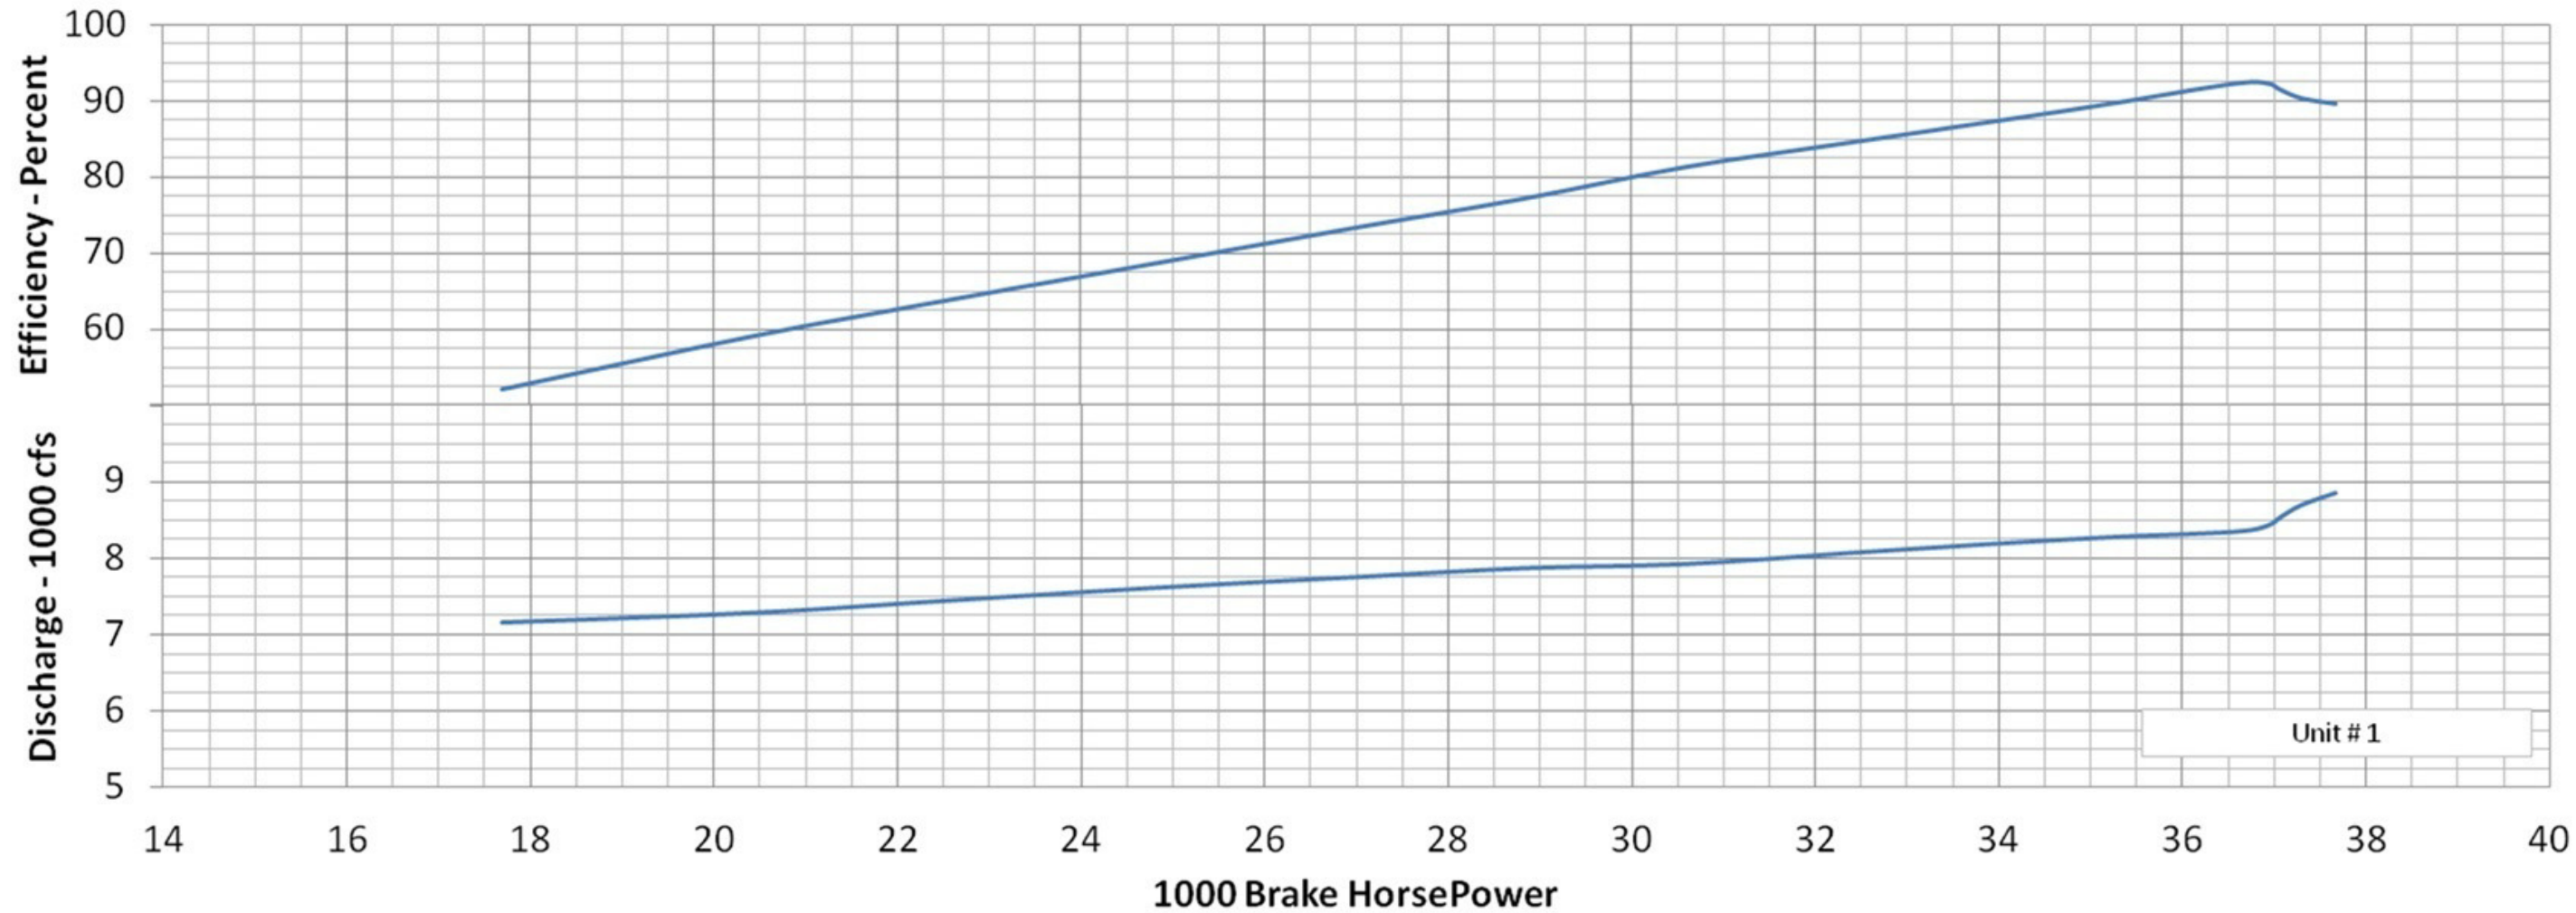


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**PERFORMANCE CURVES
FOR UNIT 1**

TURBOGENERATOR UNIT 2 PERFORMANCE CURVES

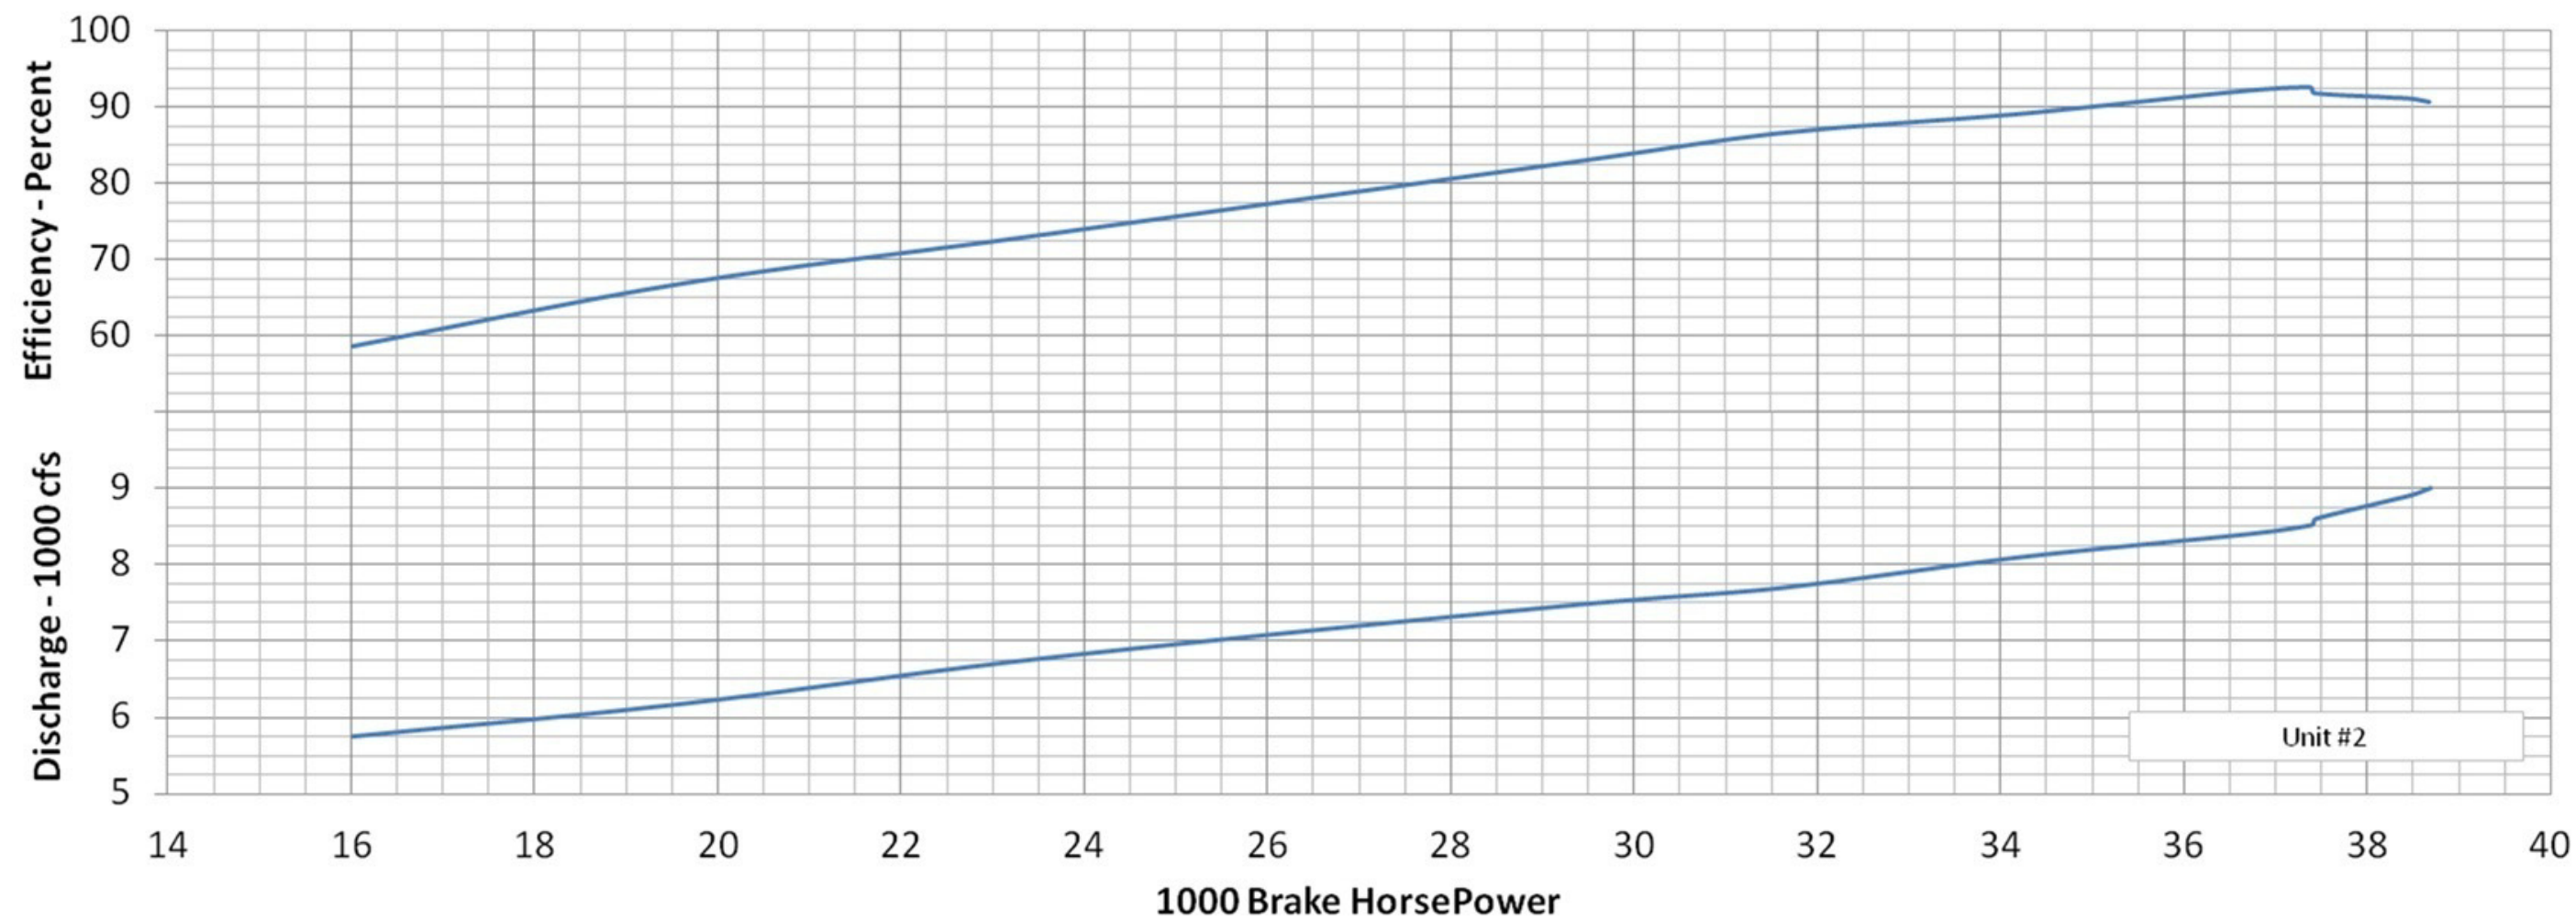




ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**PERFORMANCE CURVES
FOR UNIT 2**

TURBOGENERATOR UNIT 3 PERFORMANCE CURVES


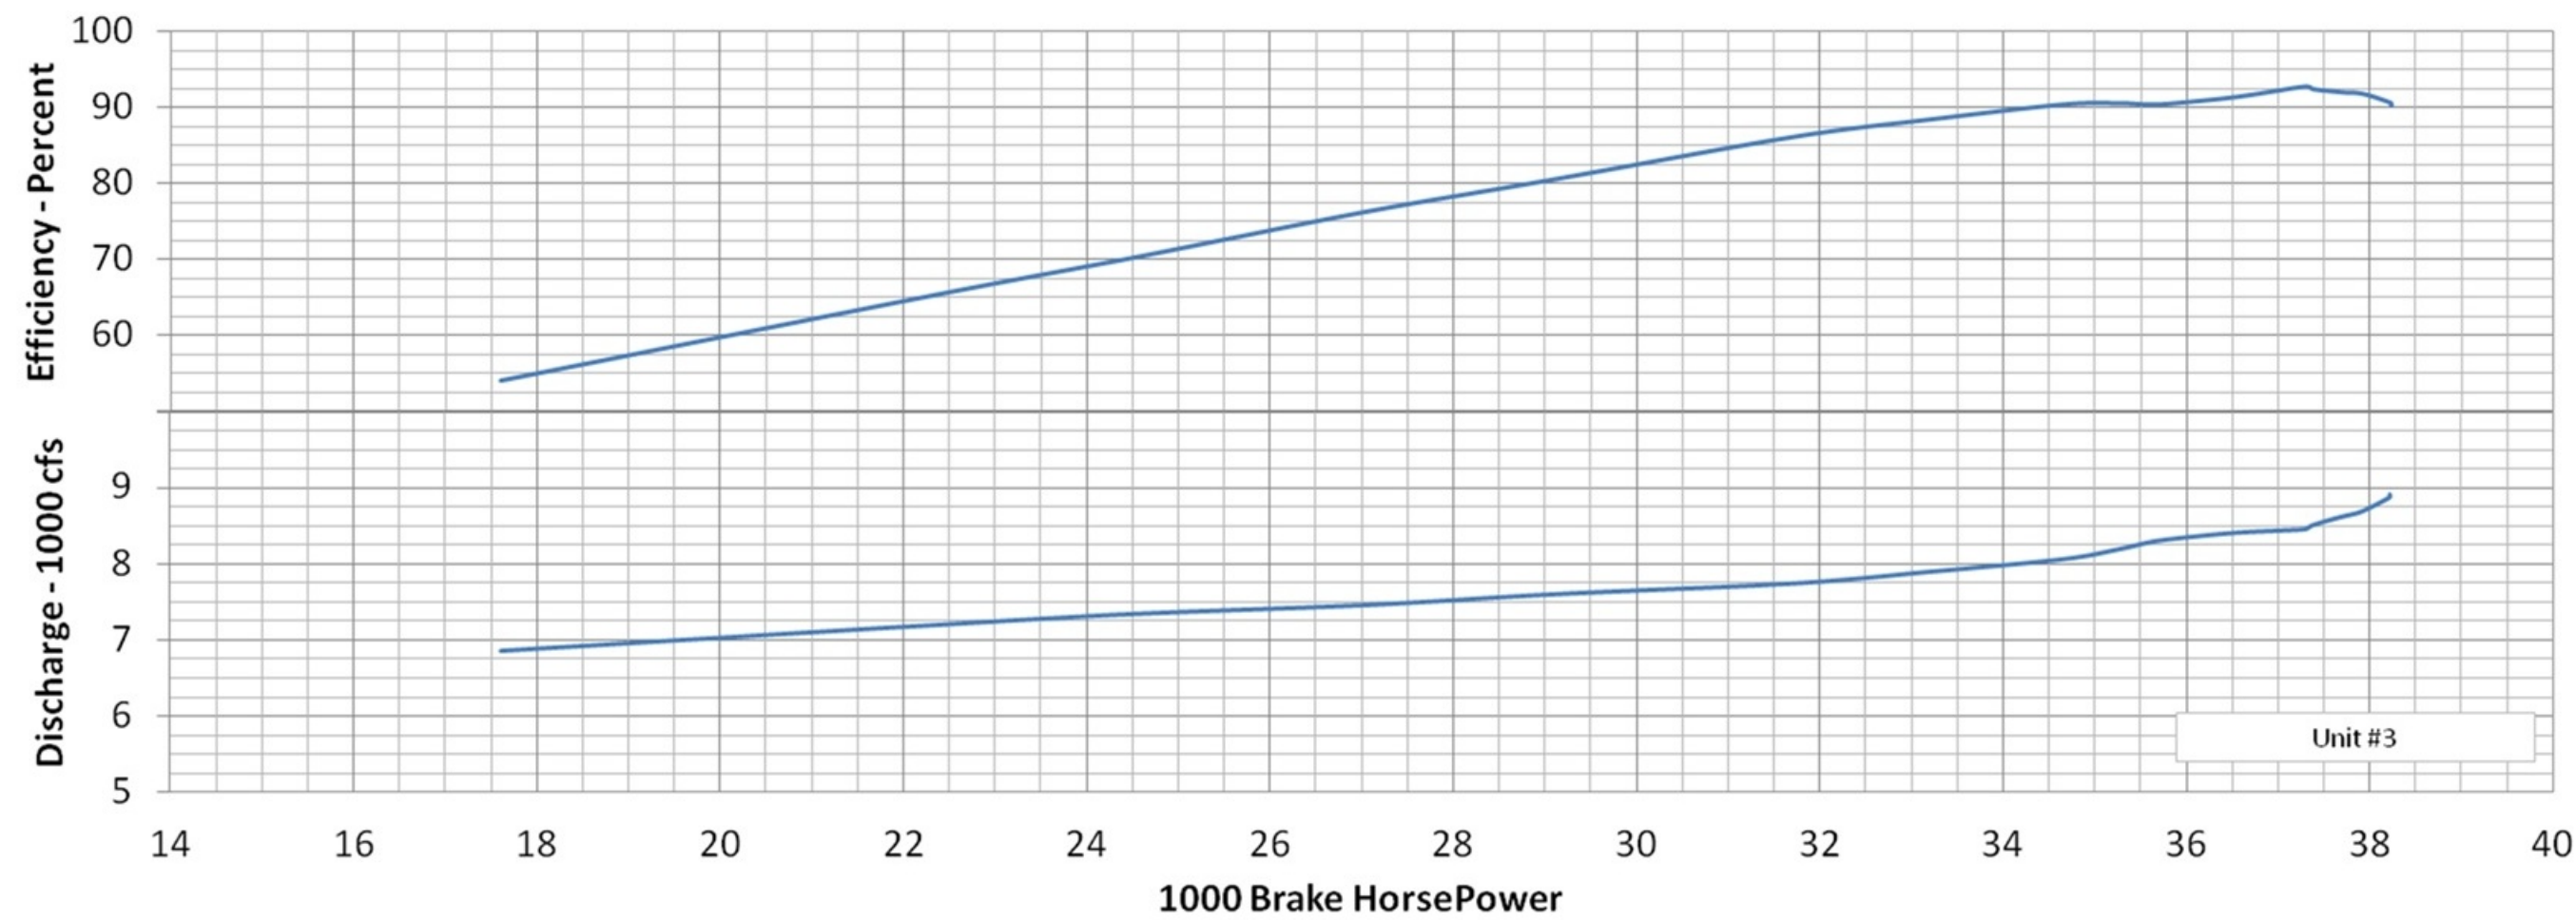


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**PERFORMANCE CURVES
FOR UNIT 3**

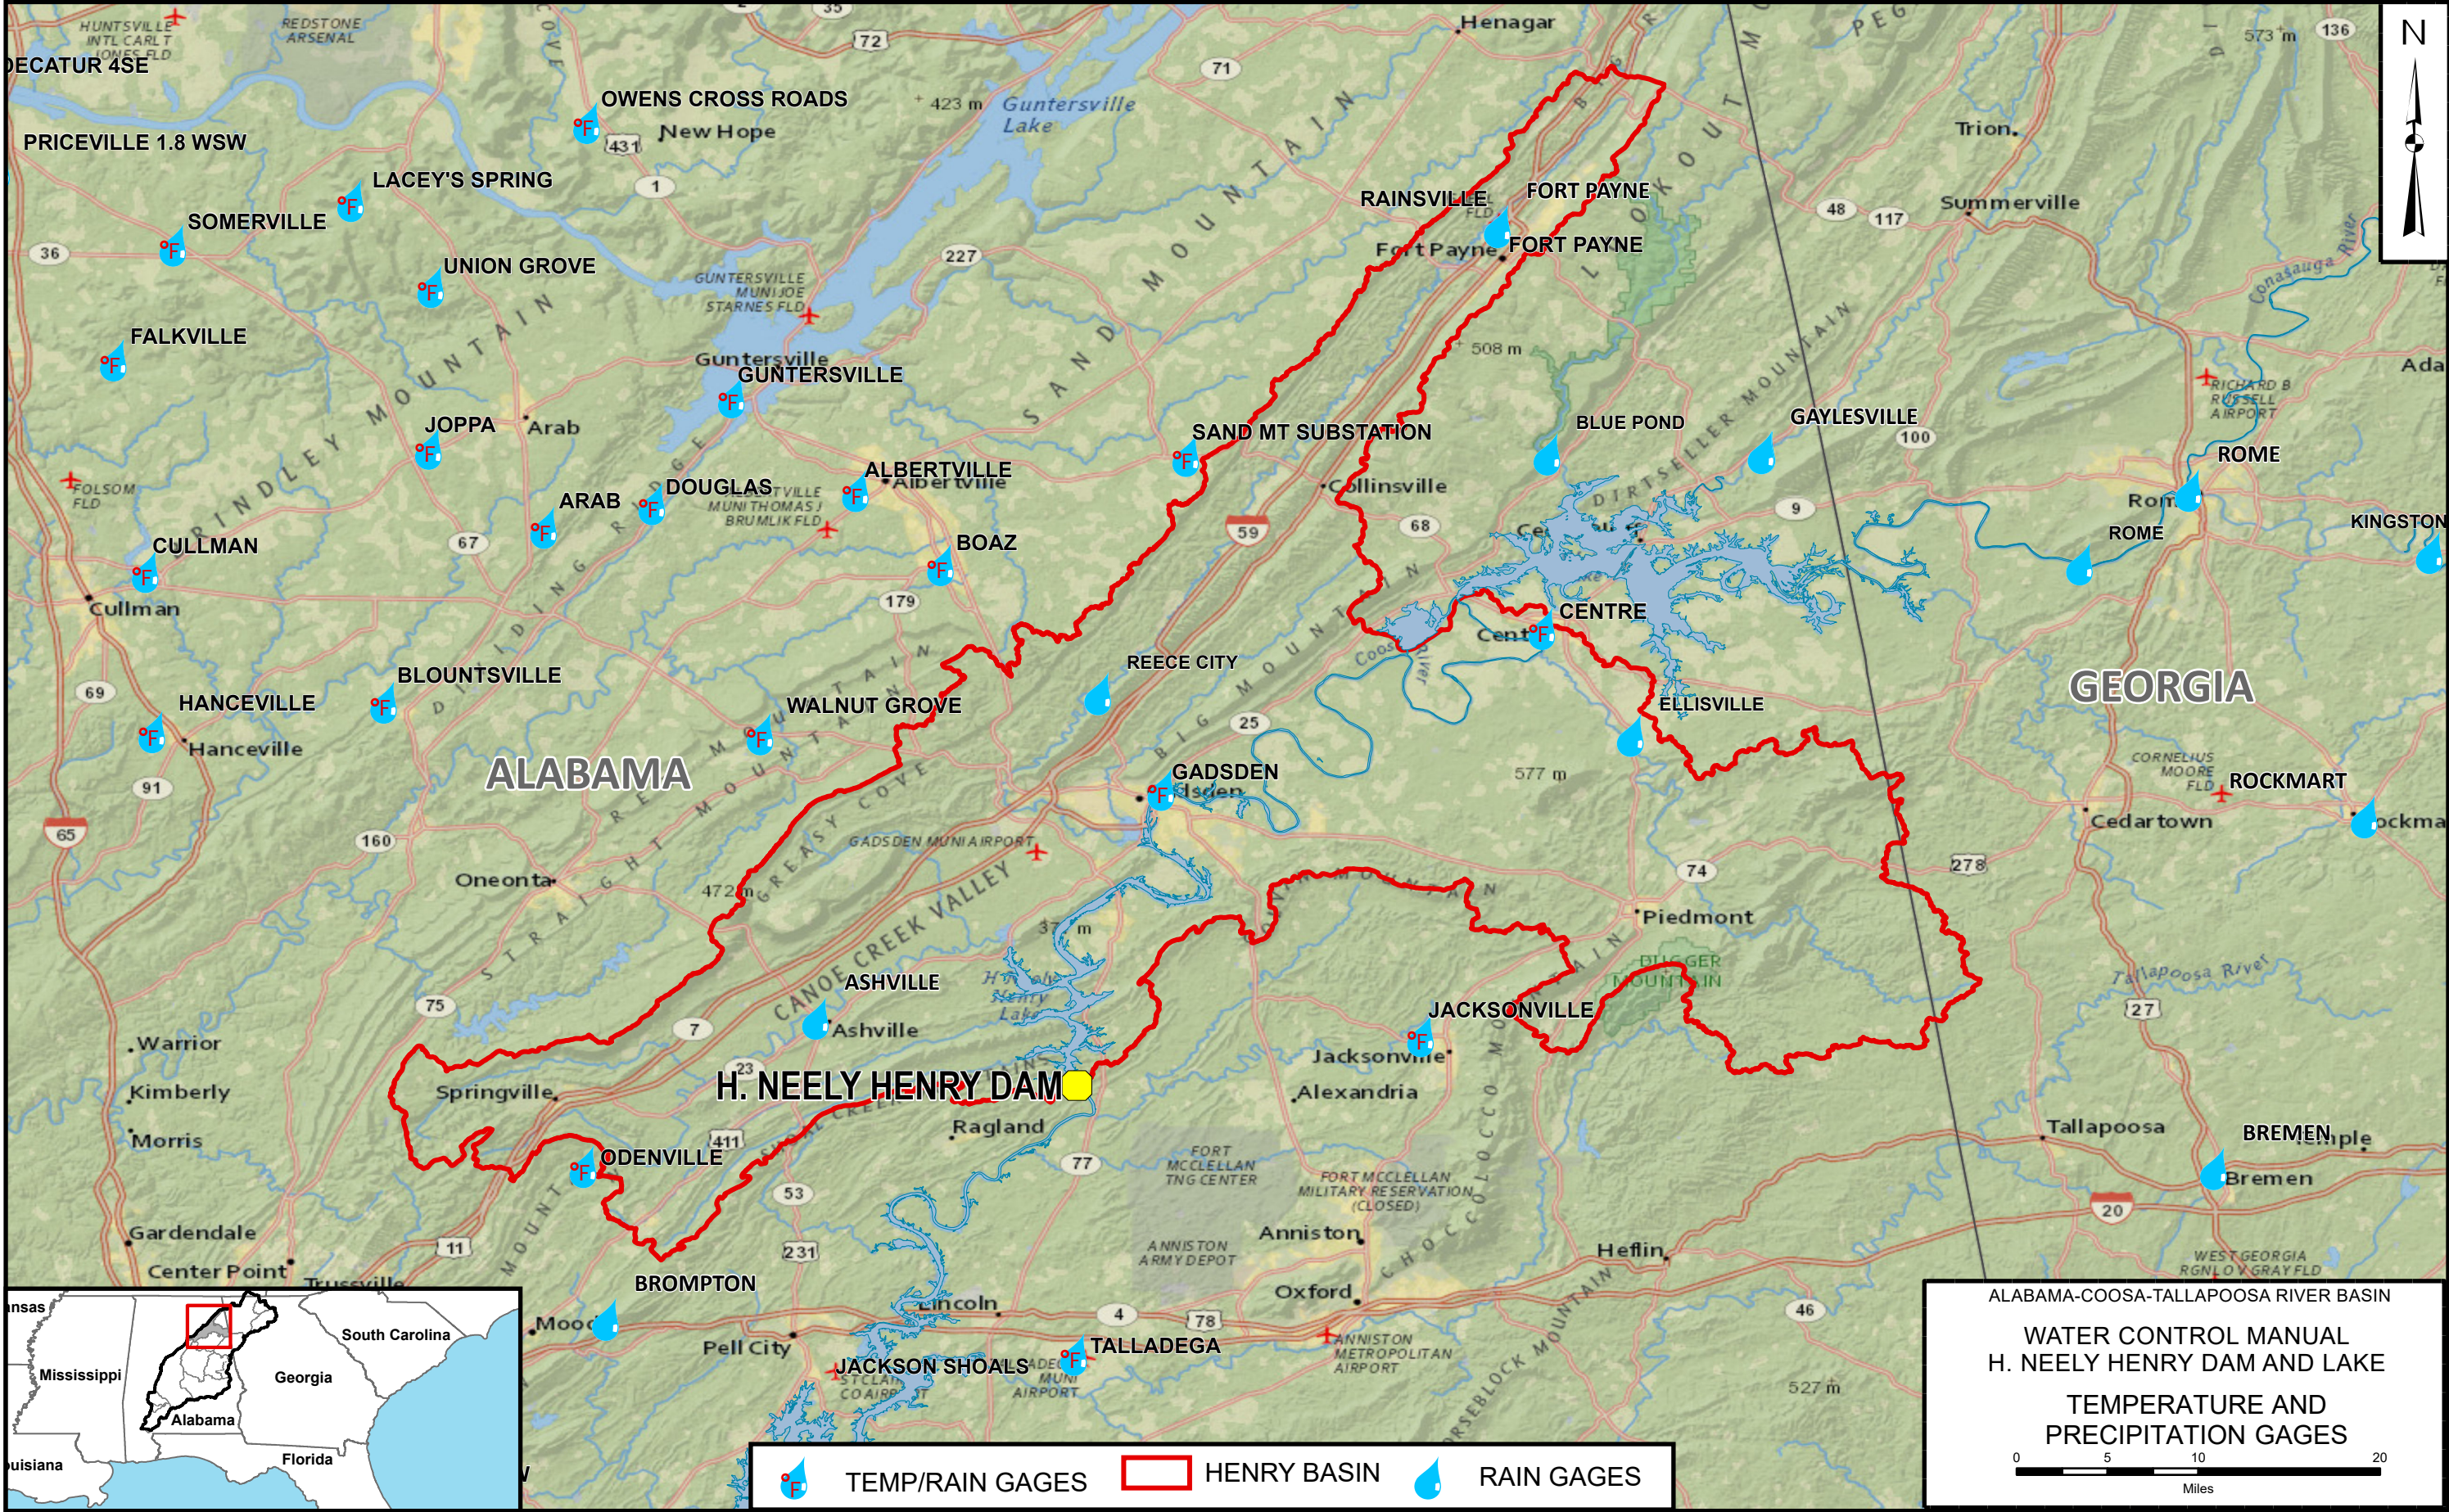

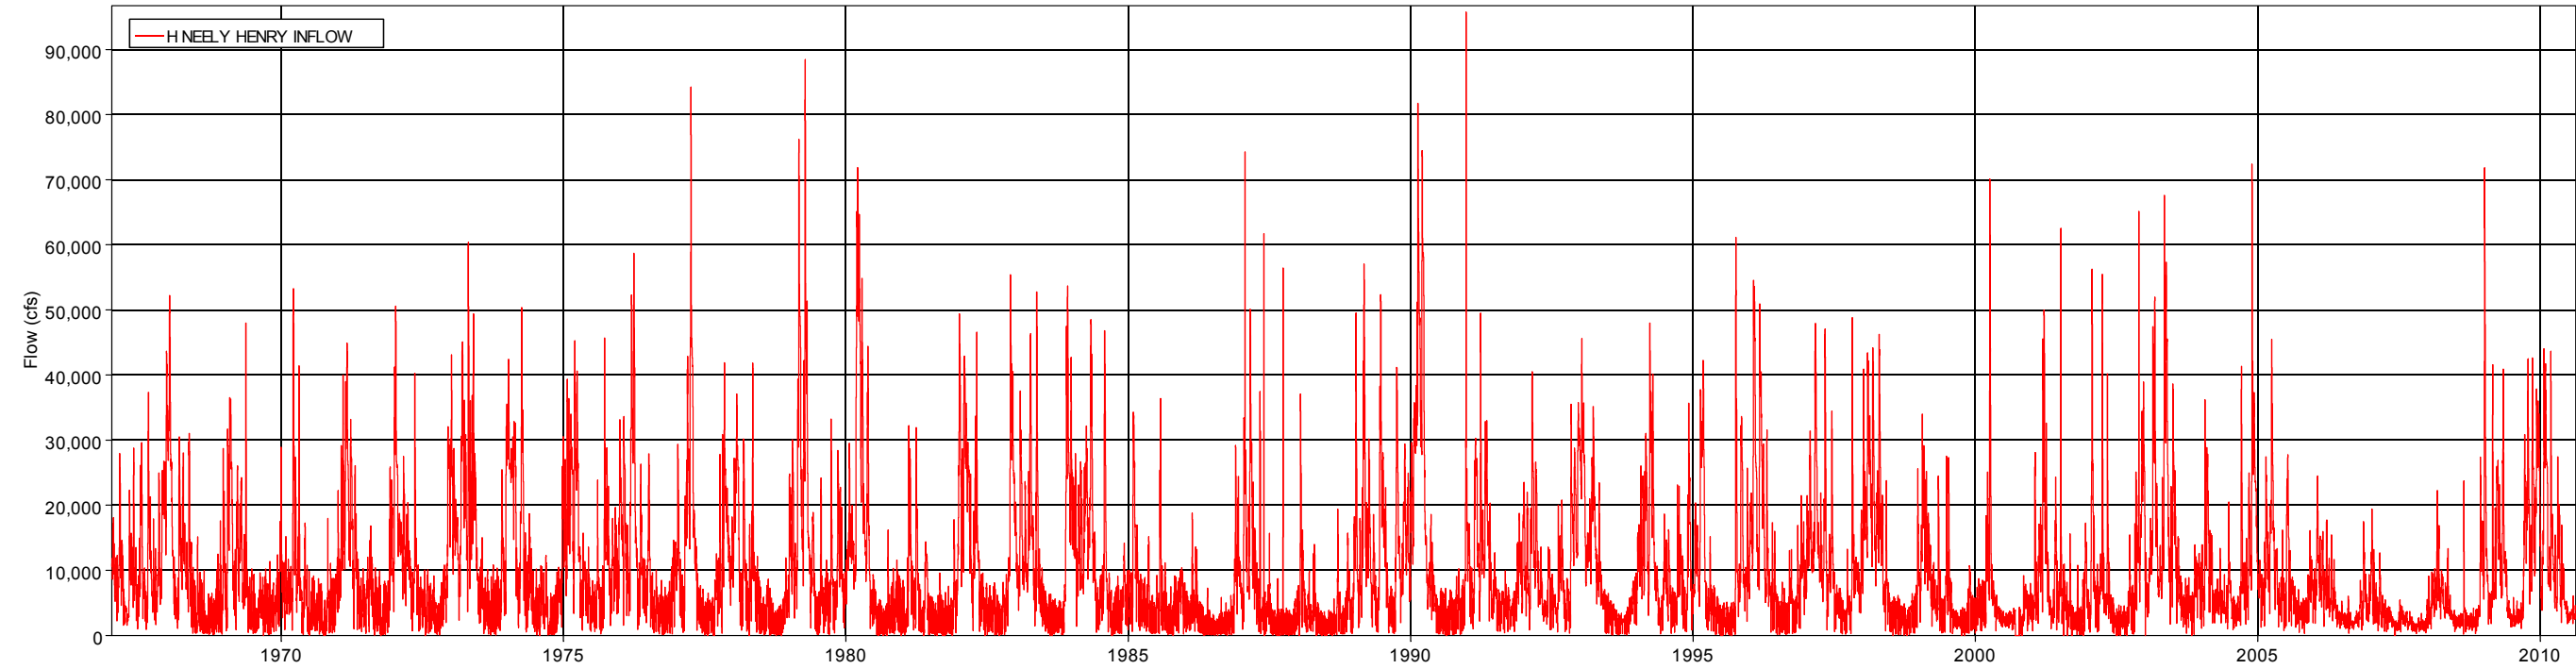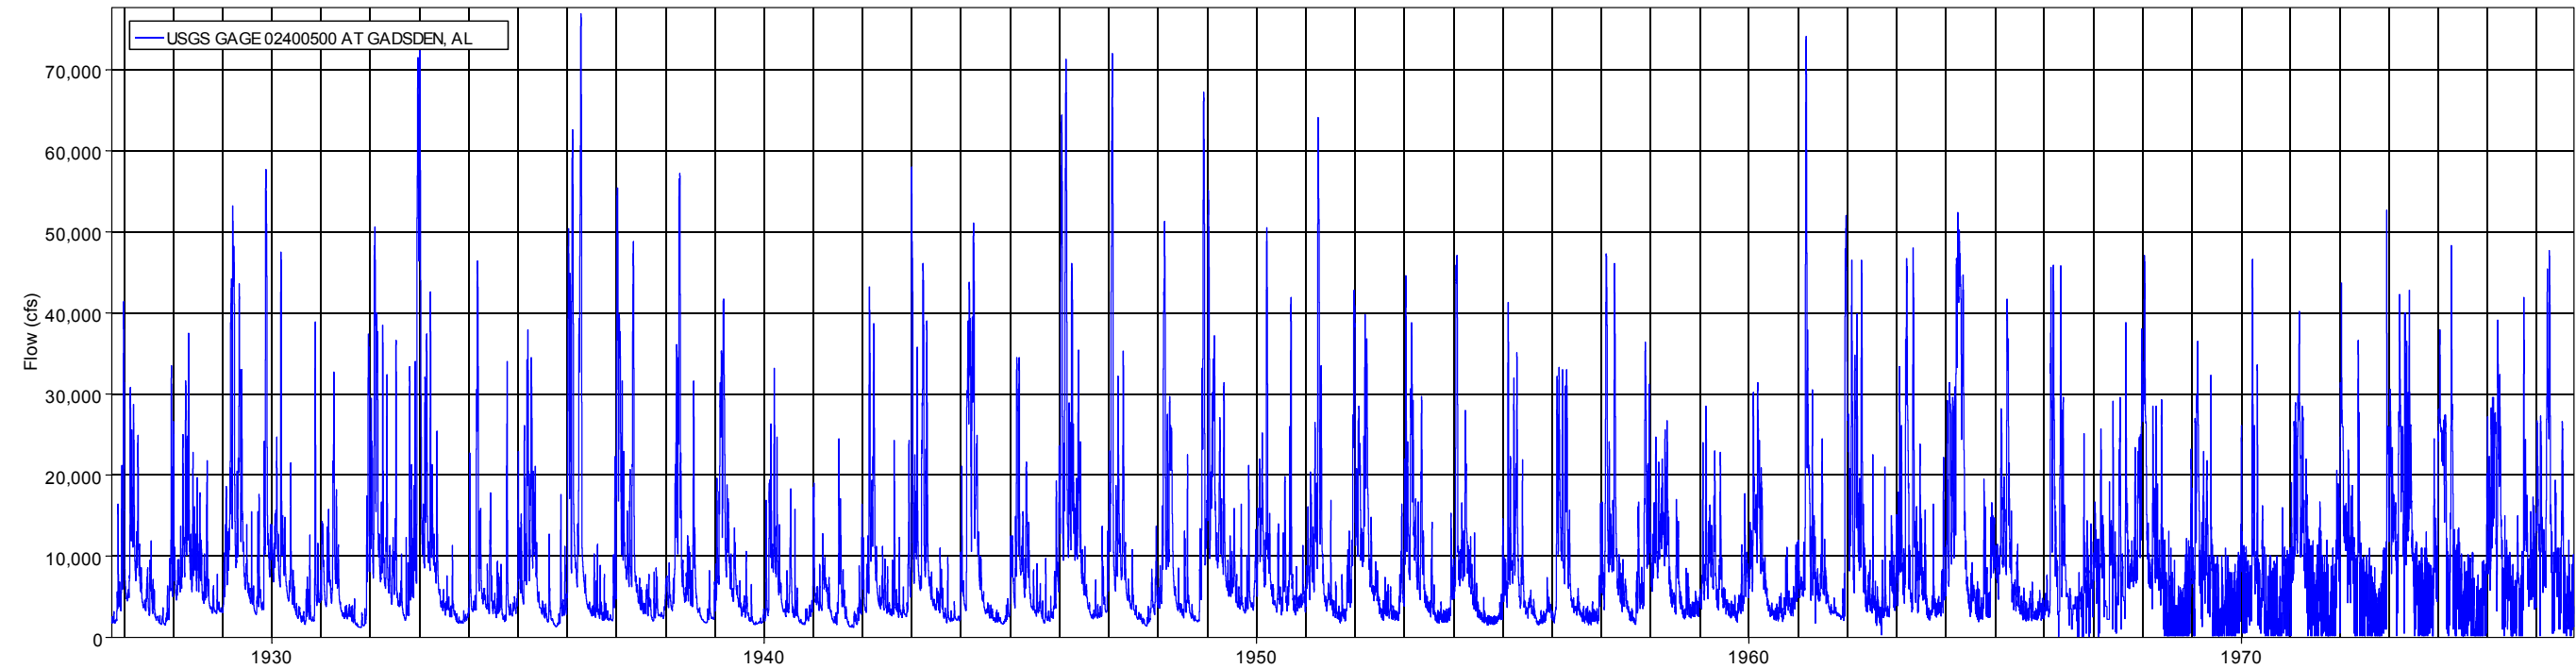



ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
DISCHARGE HYDROGRAPHS
AT USGS GAGE 02400500 AT GADSDEN, AL AND AT
H. NEELY HENRY DAM

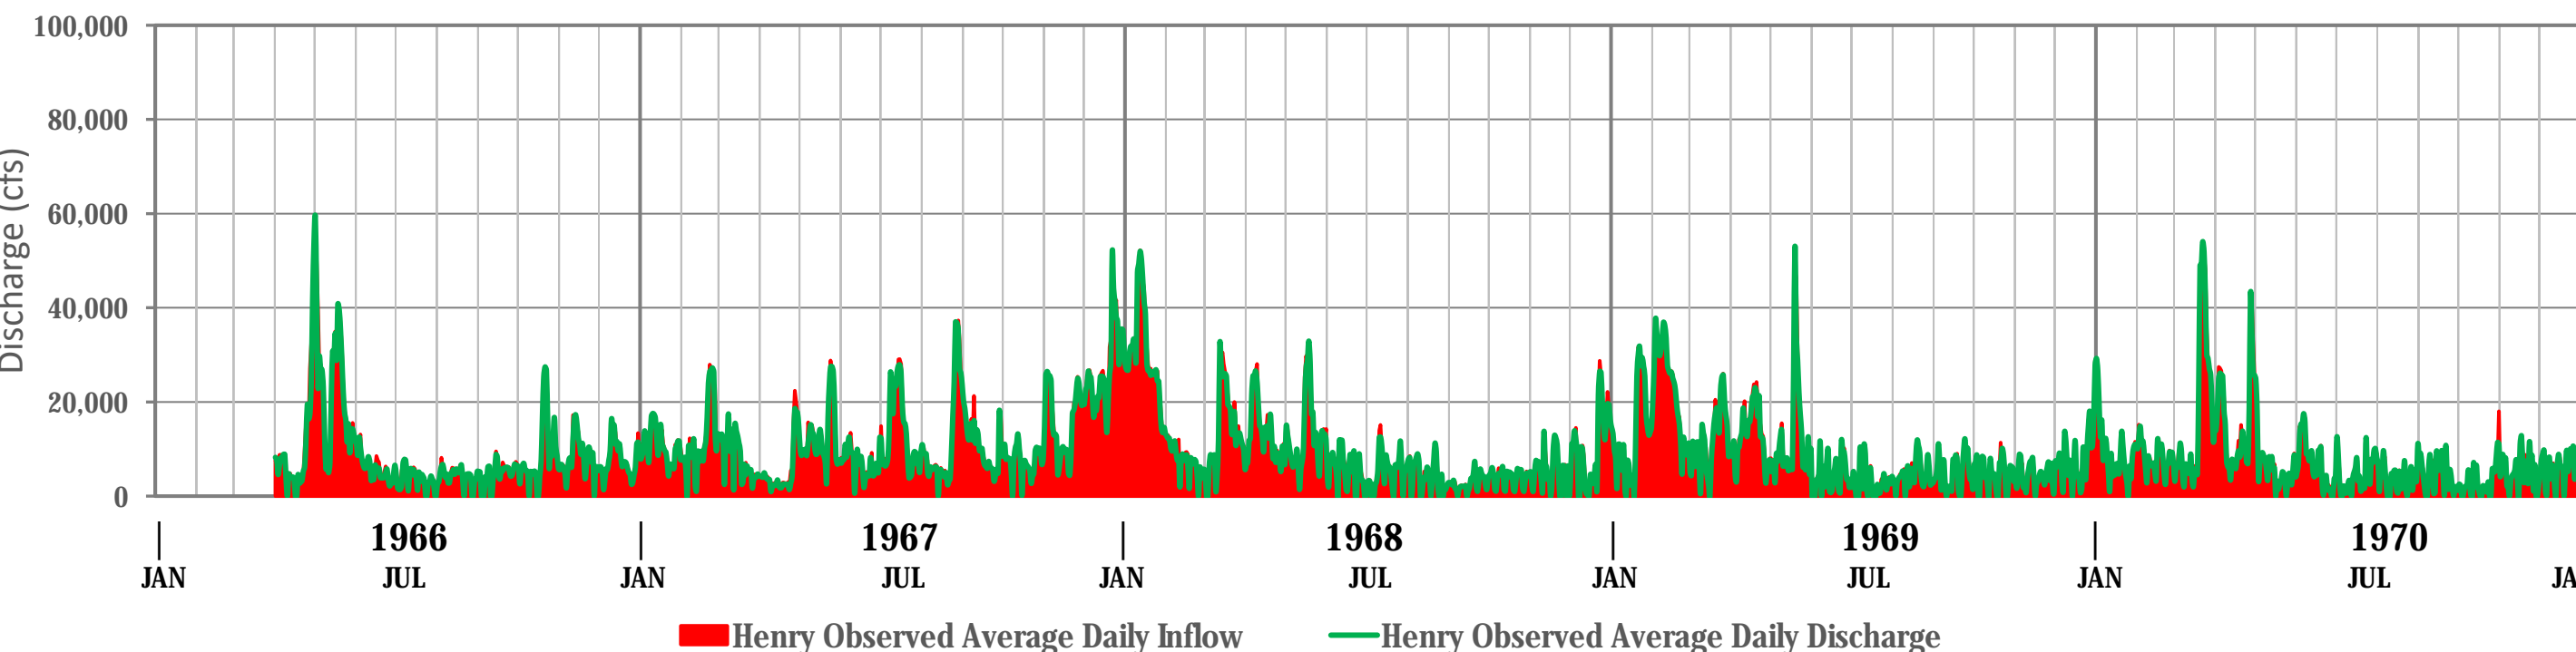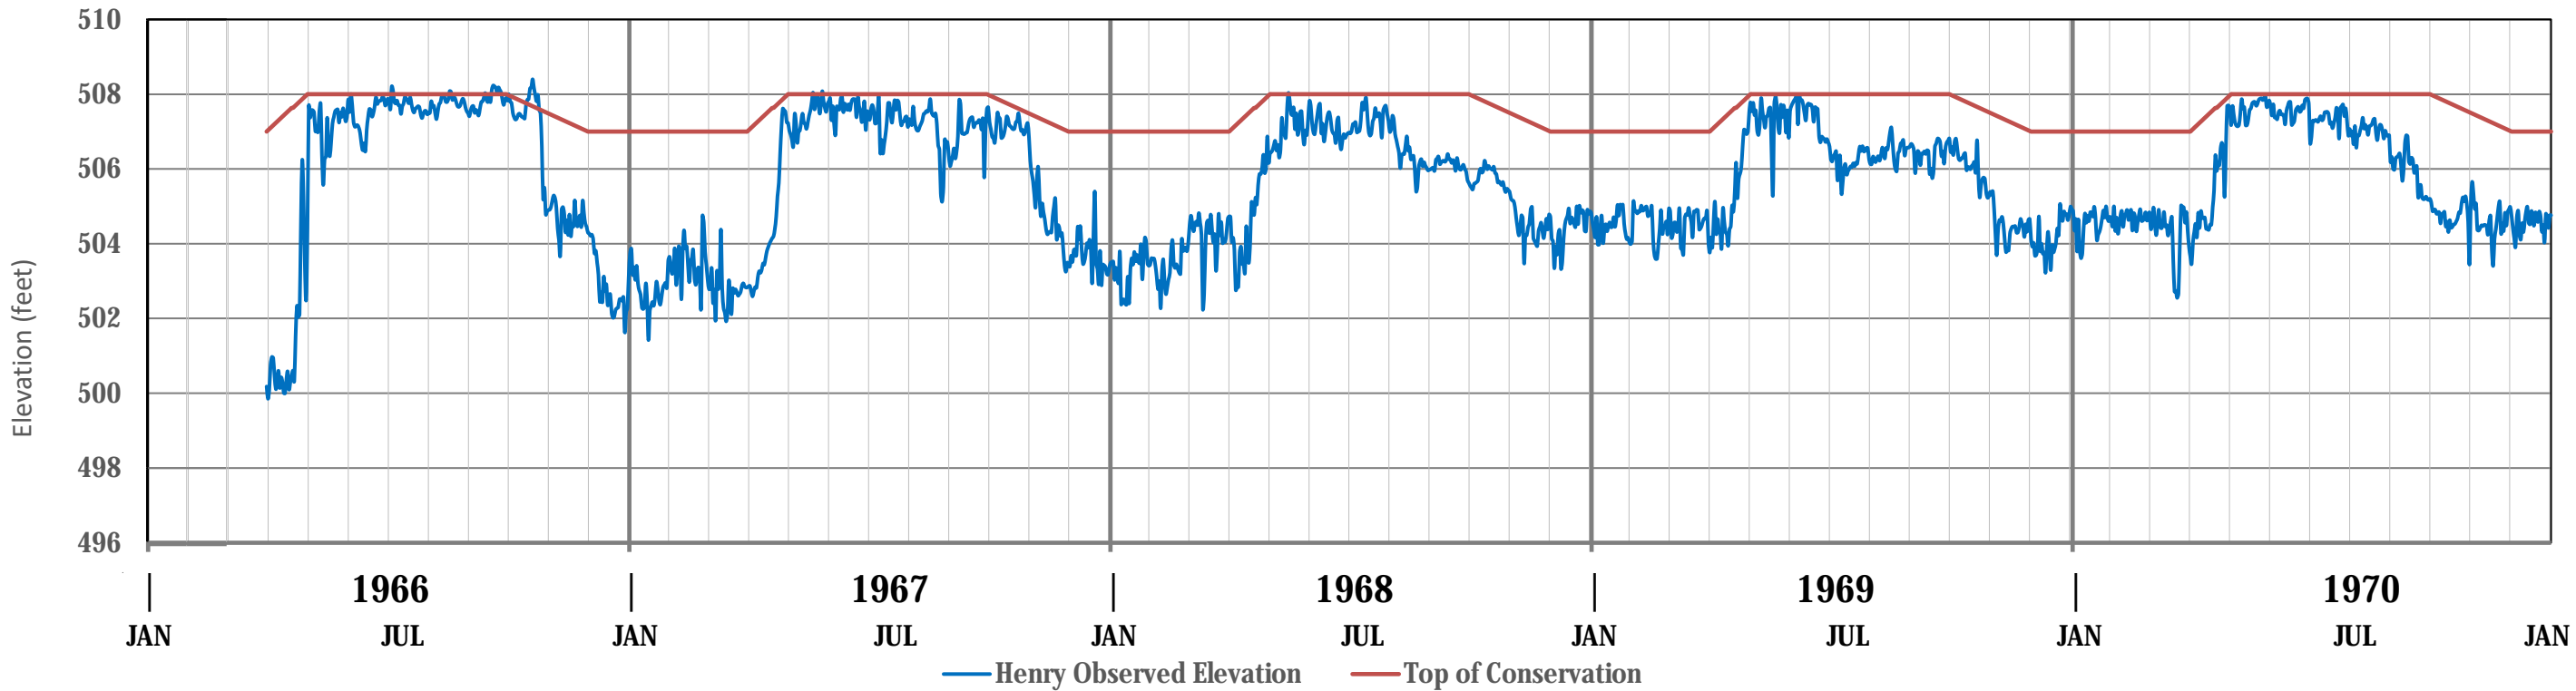

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

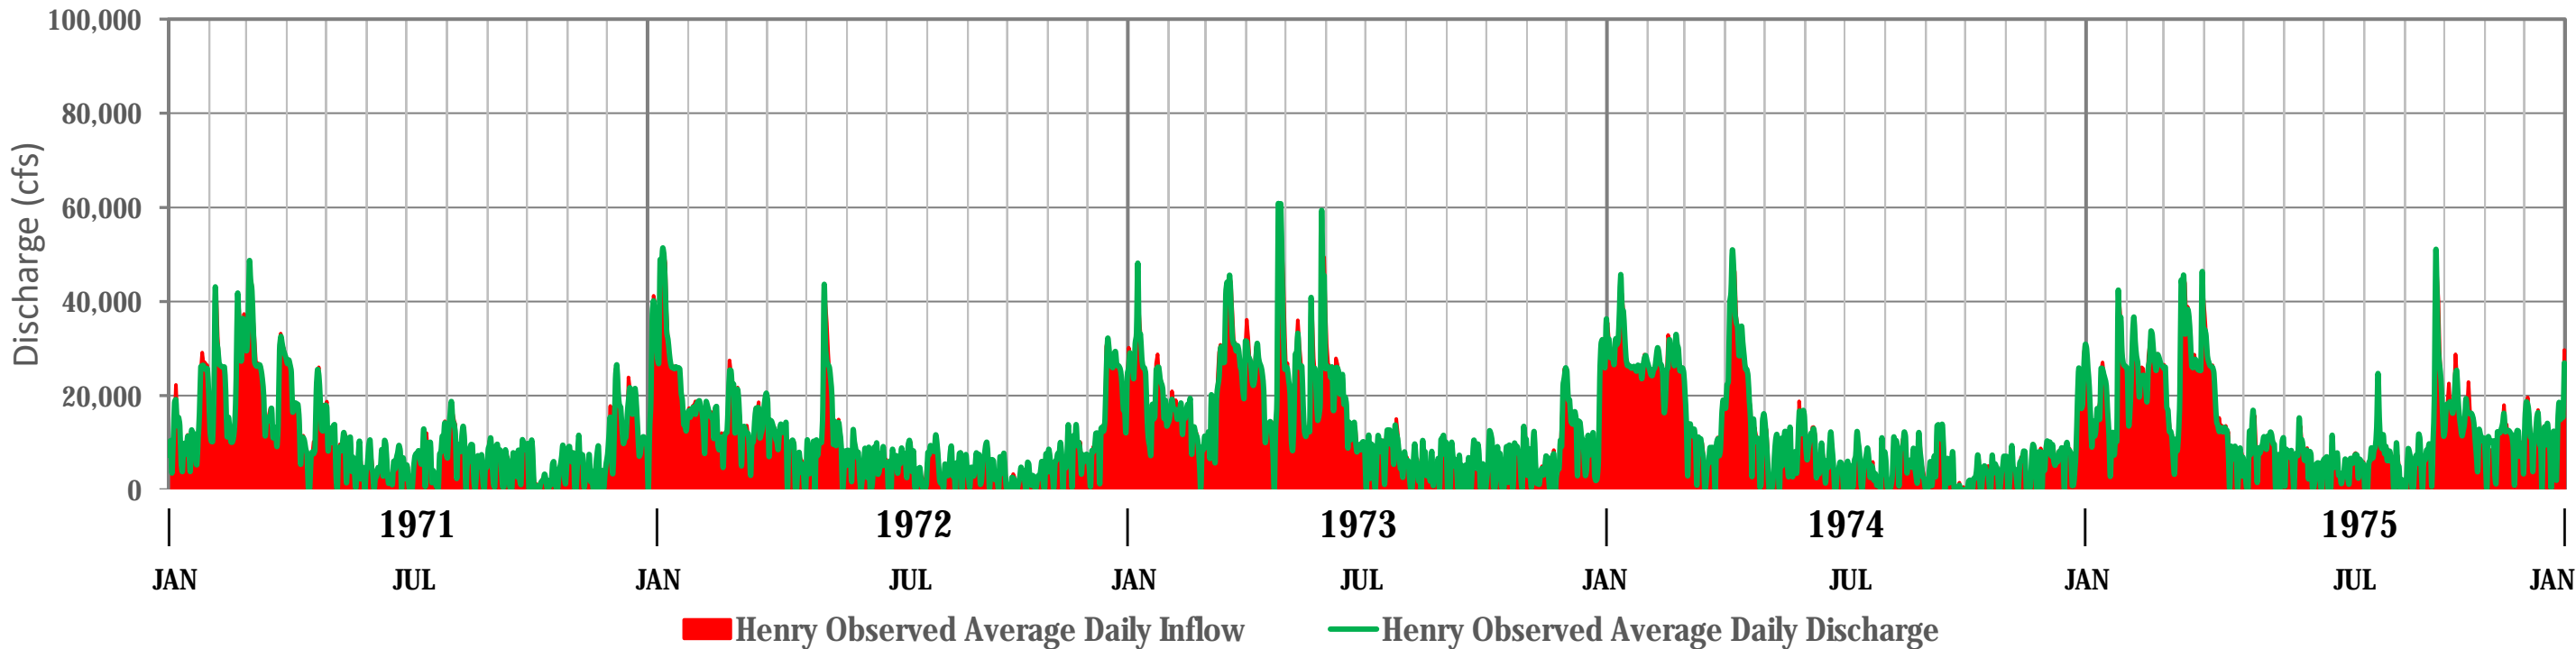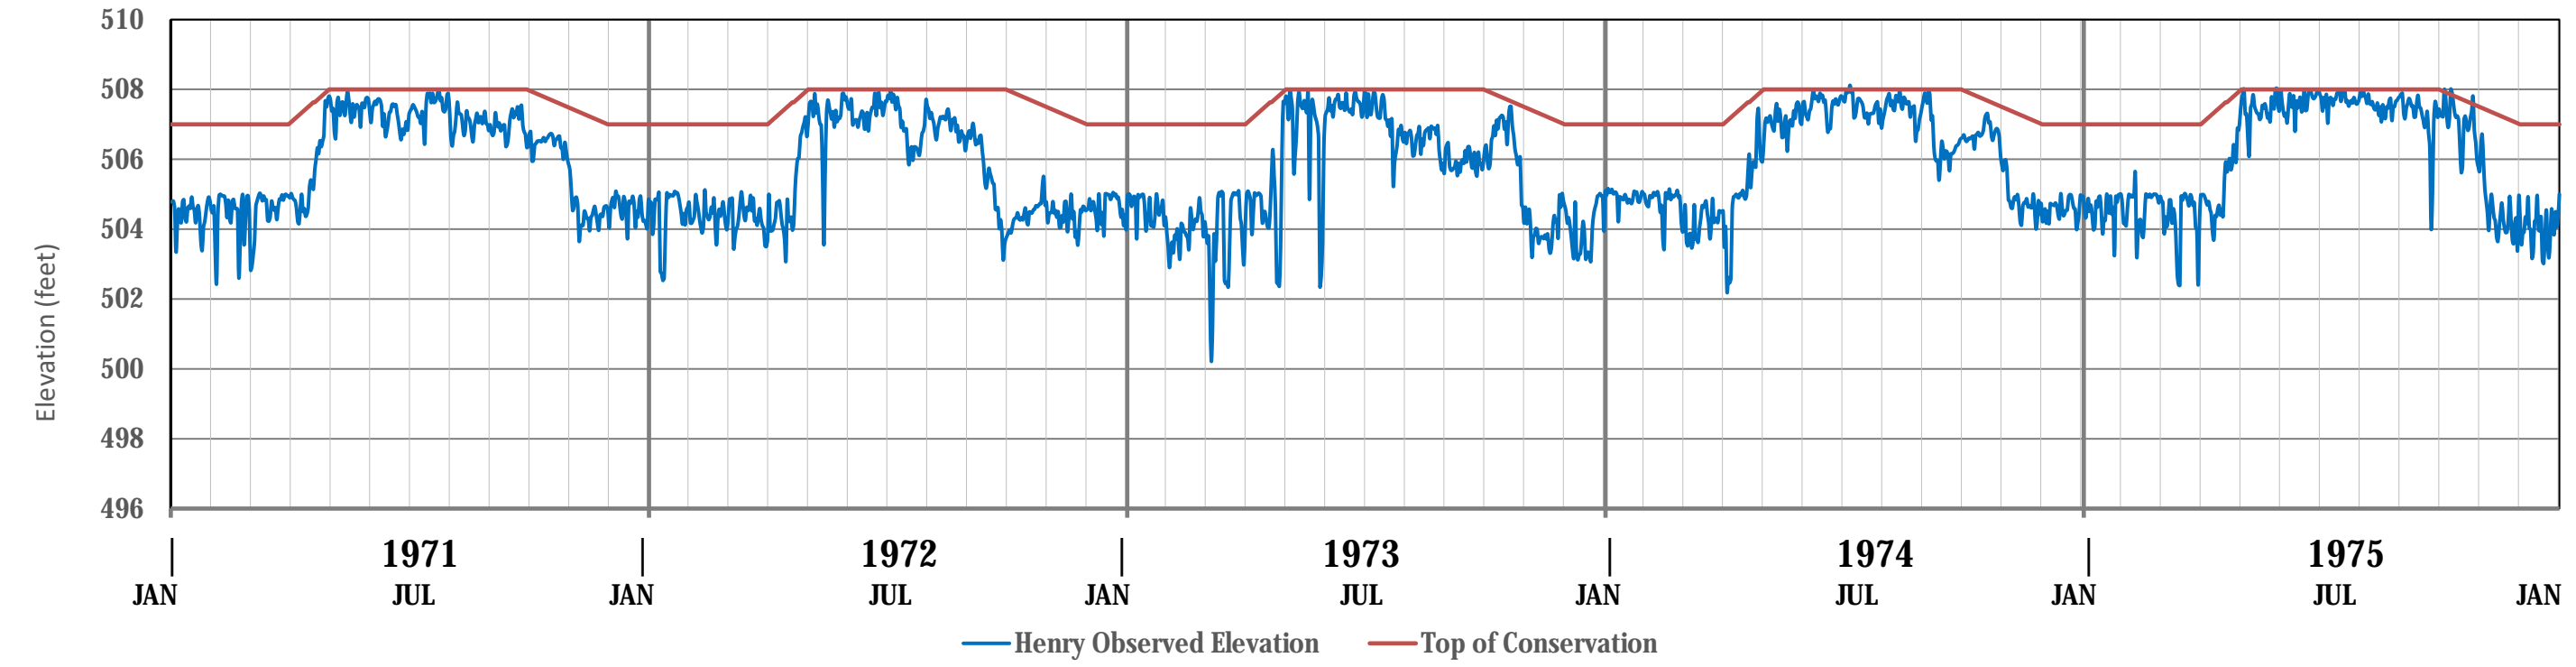

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

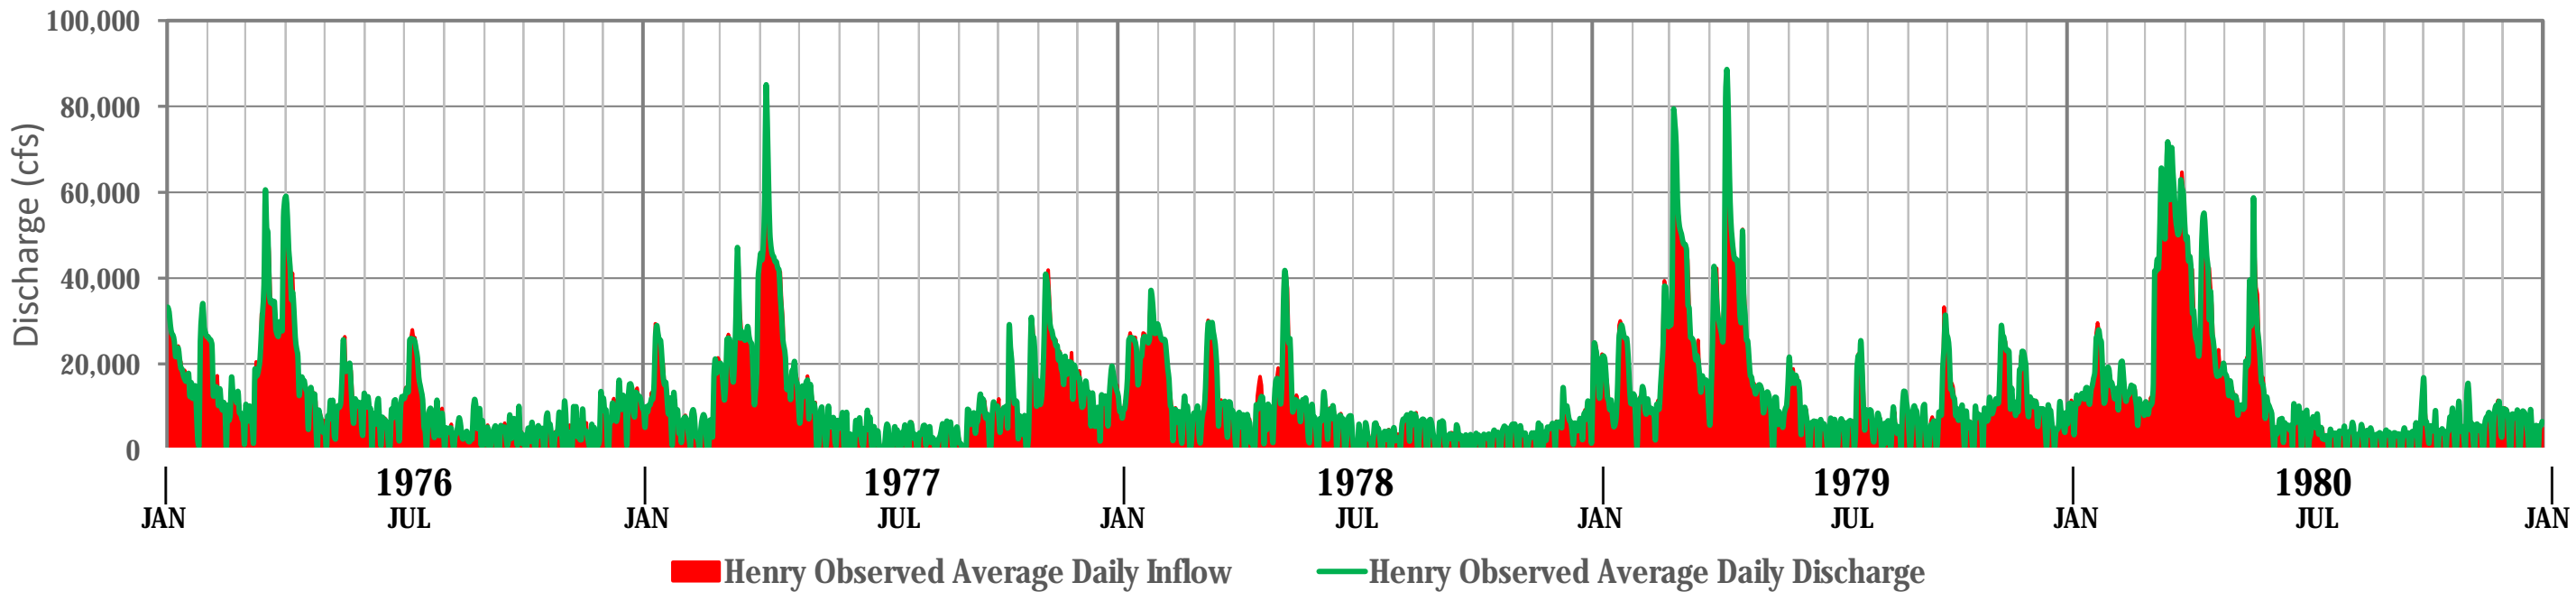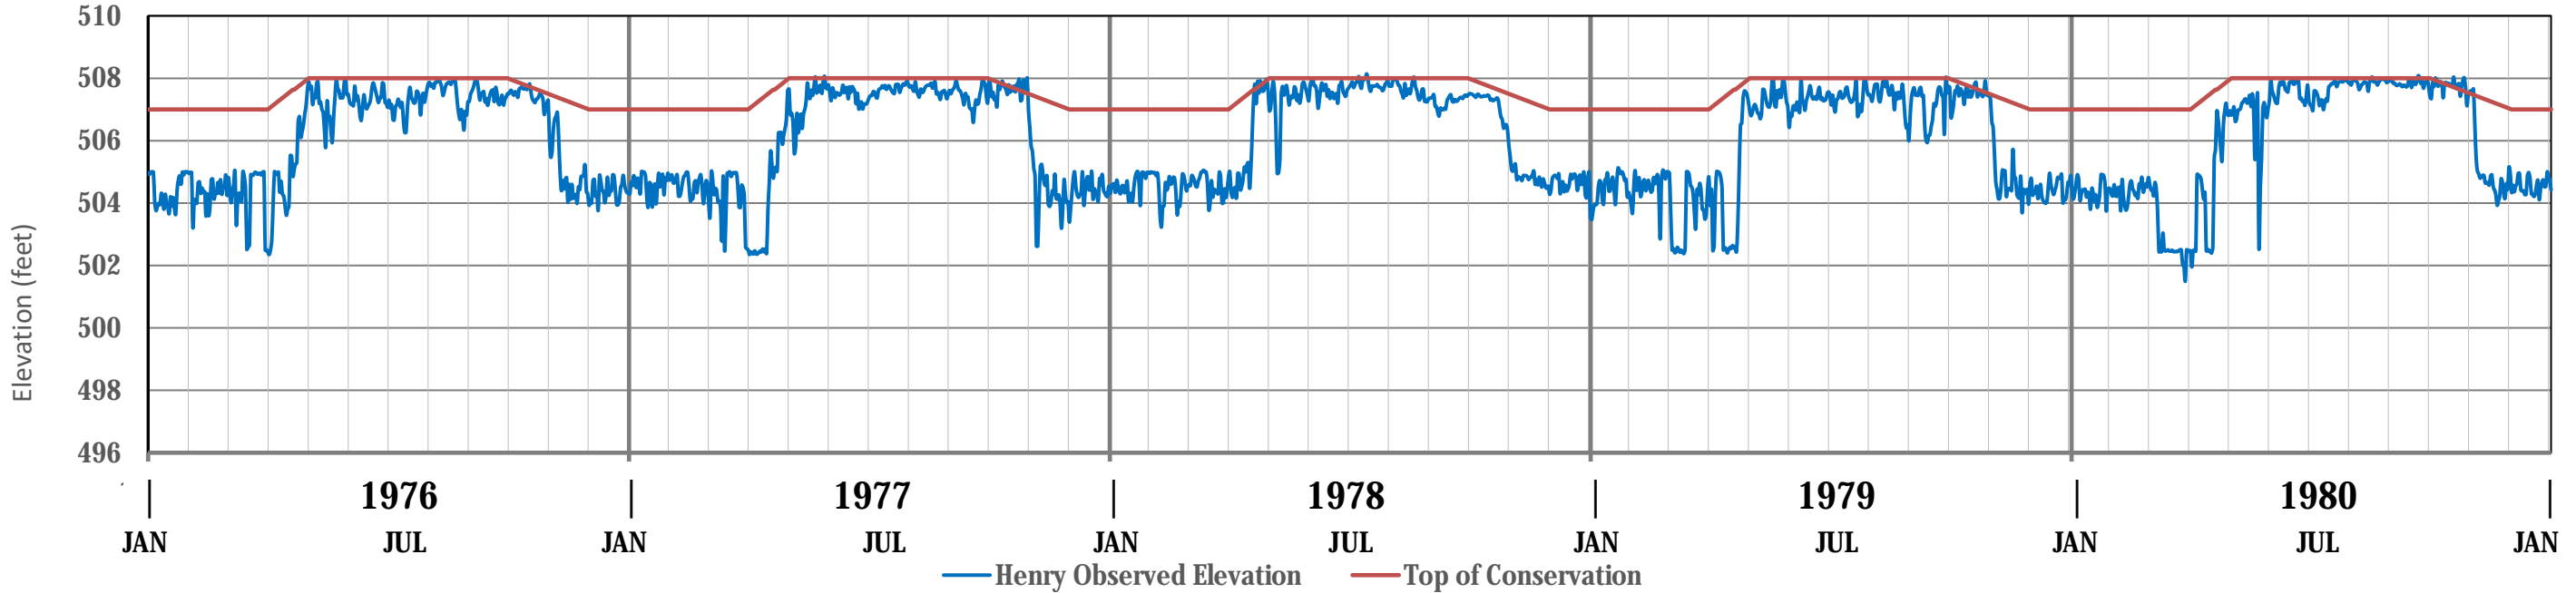

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

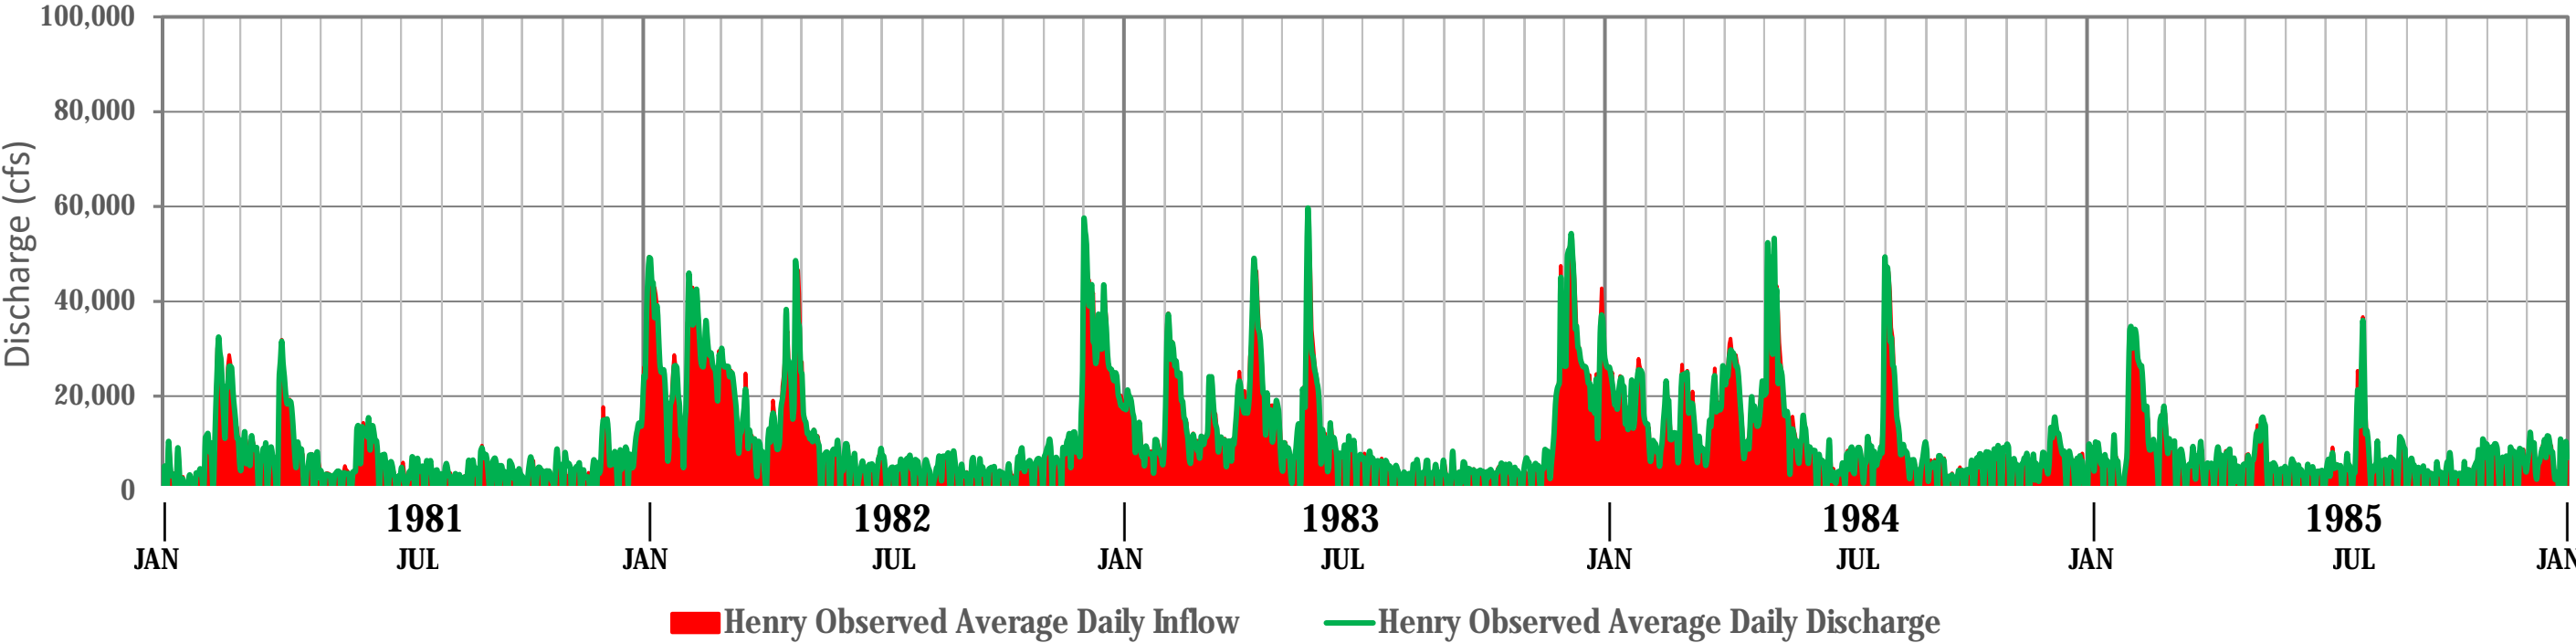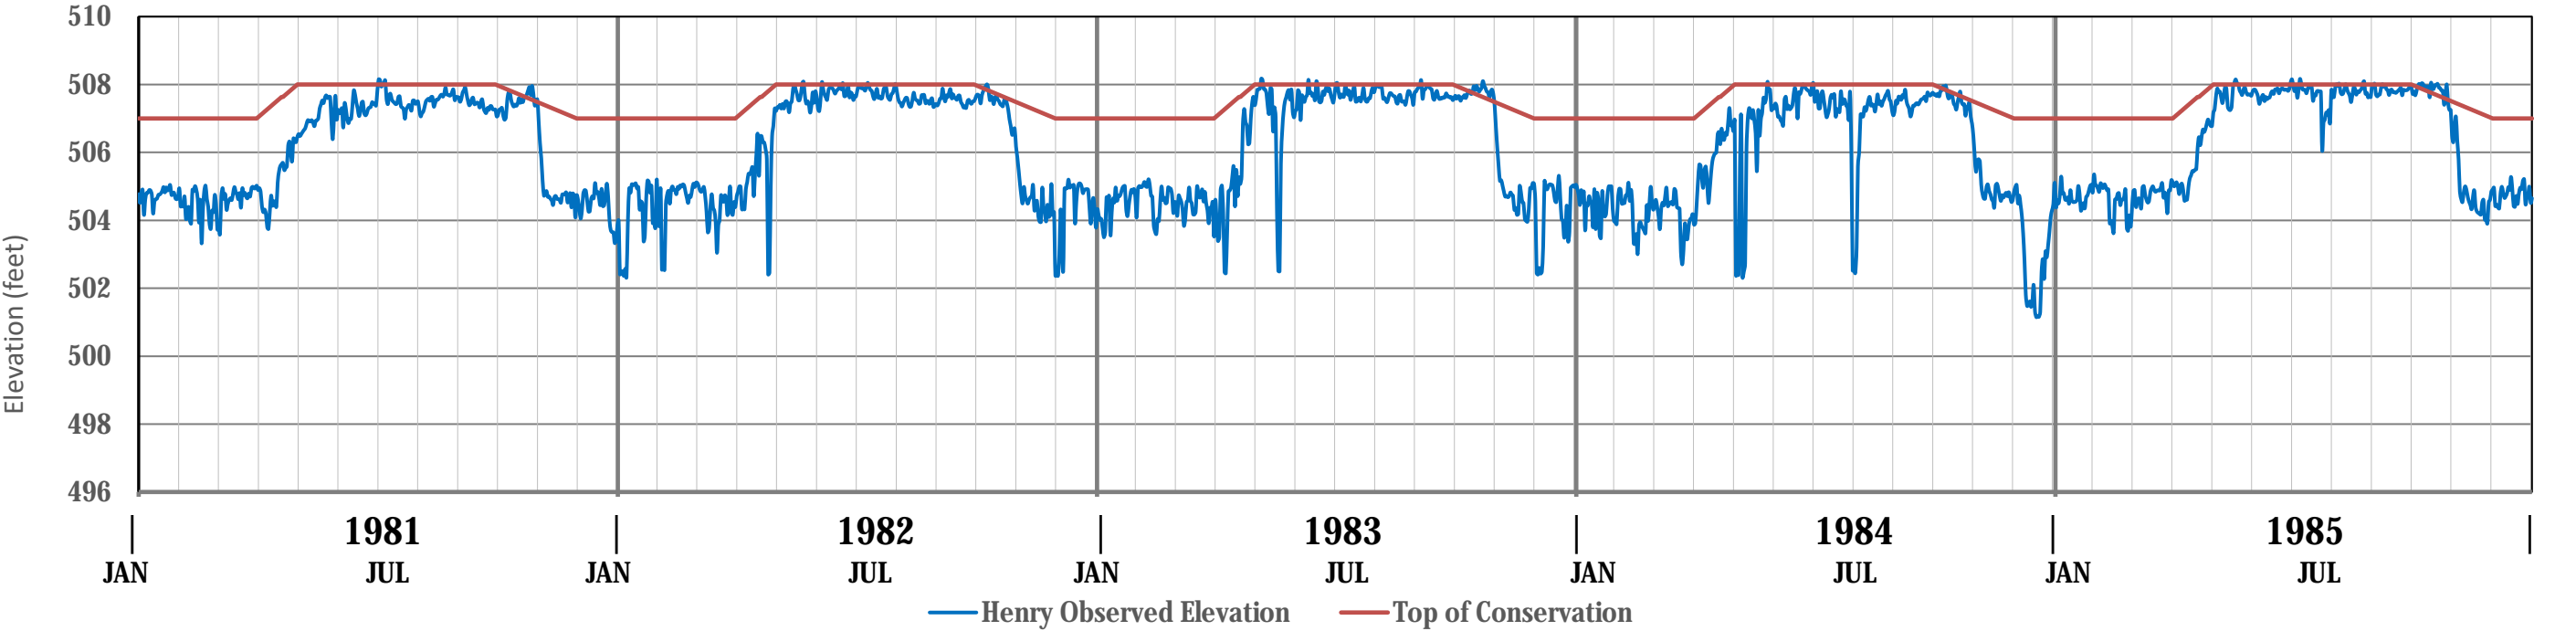

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

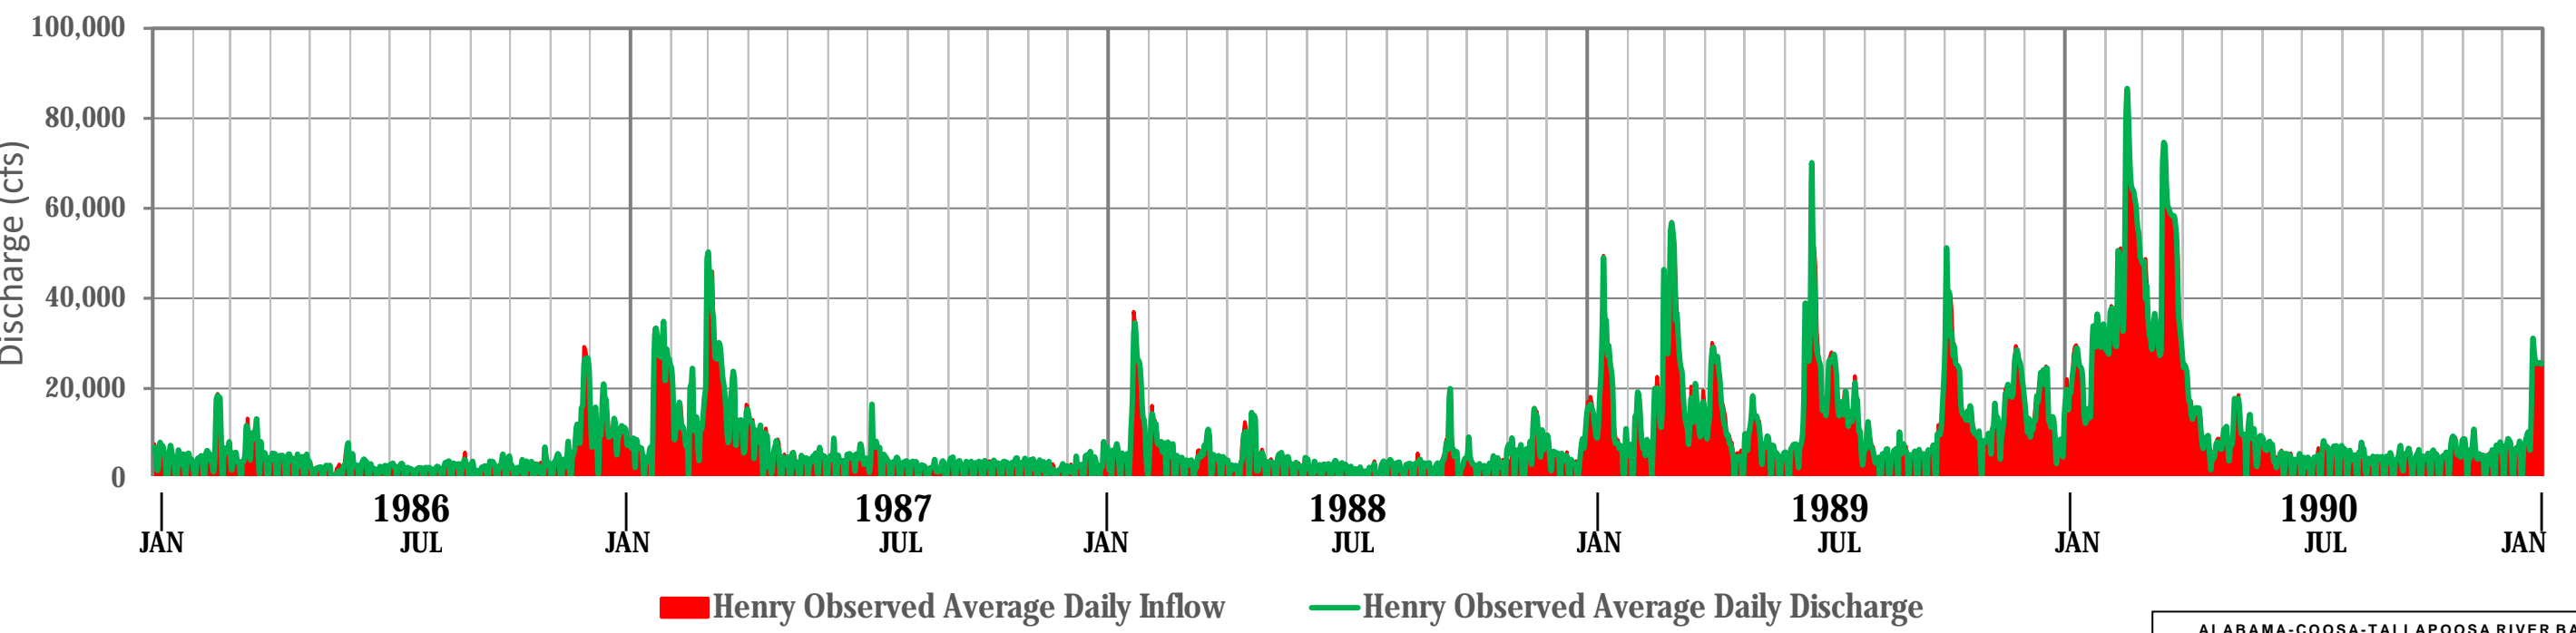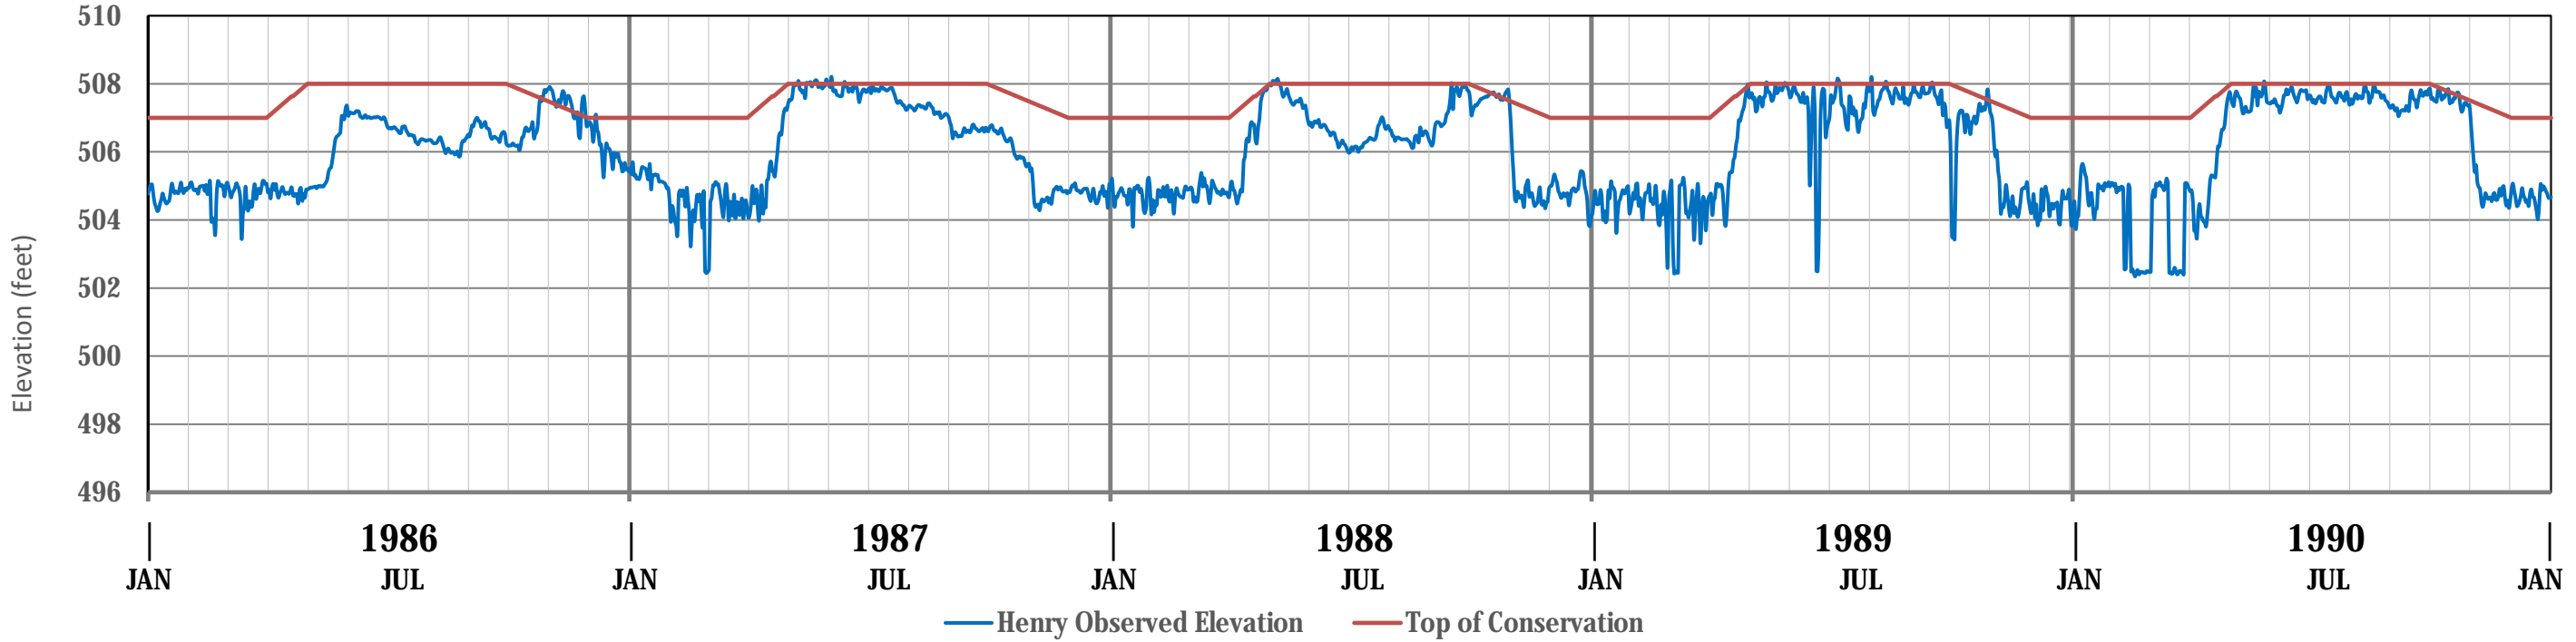

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

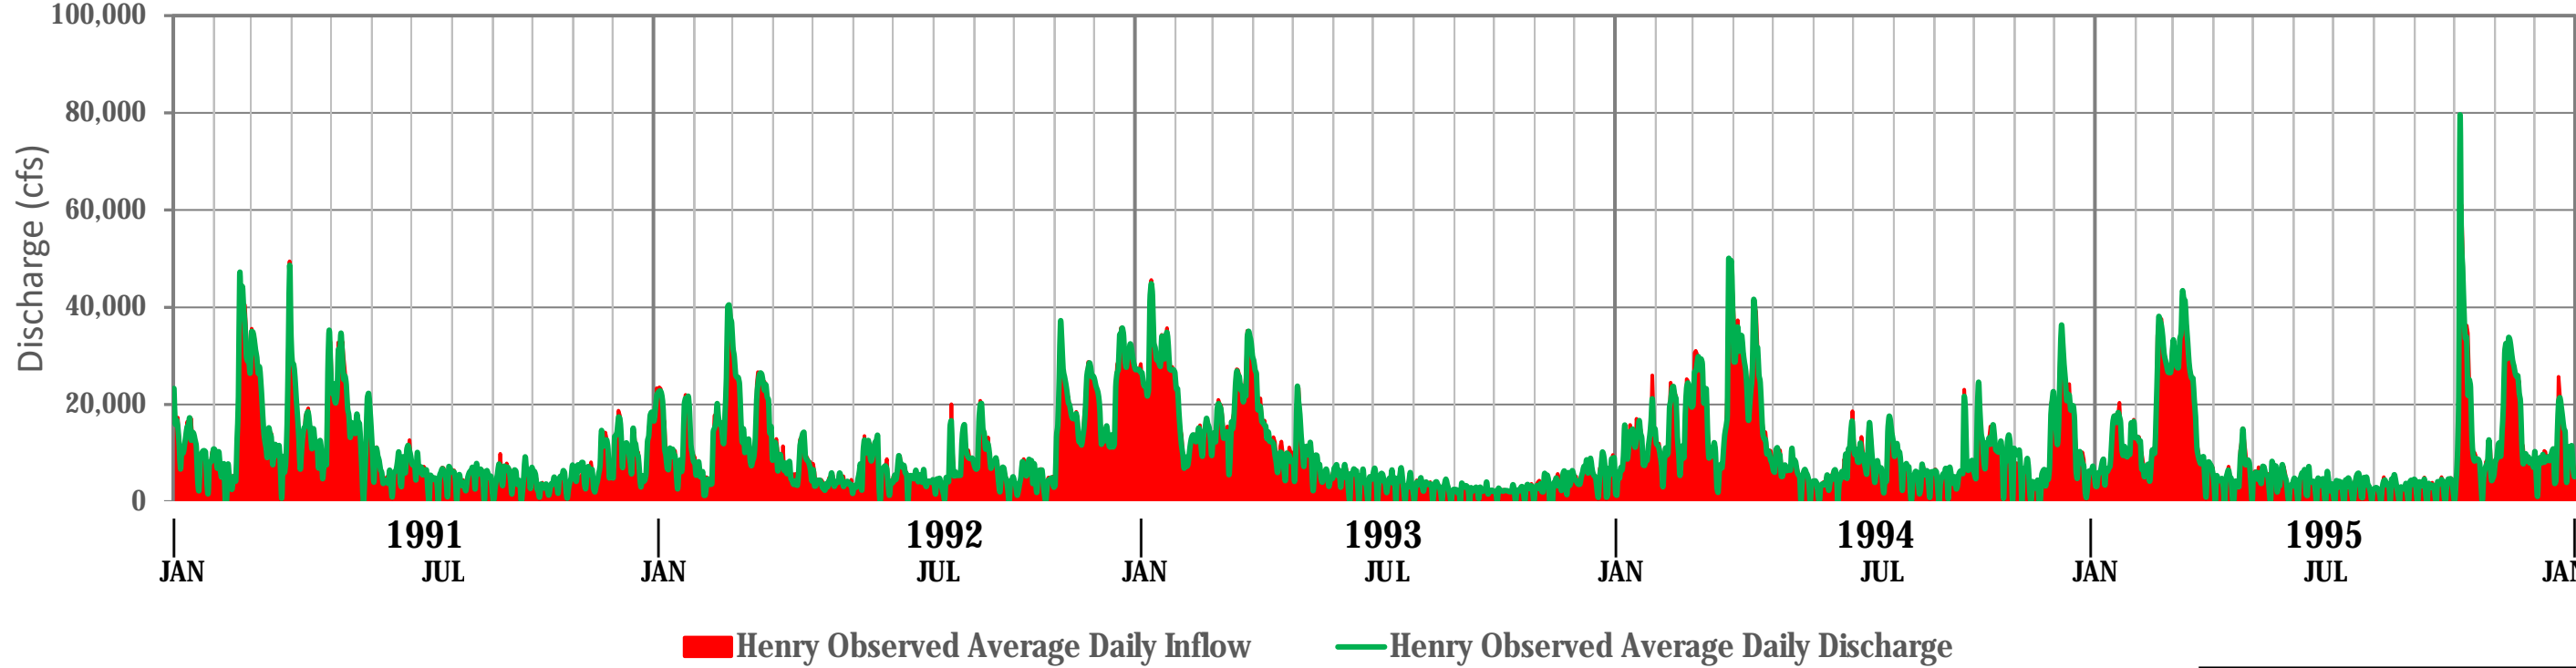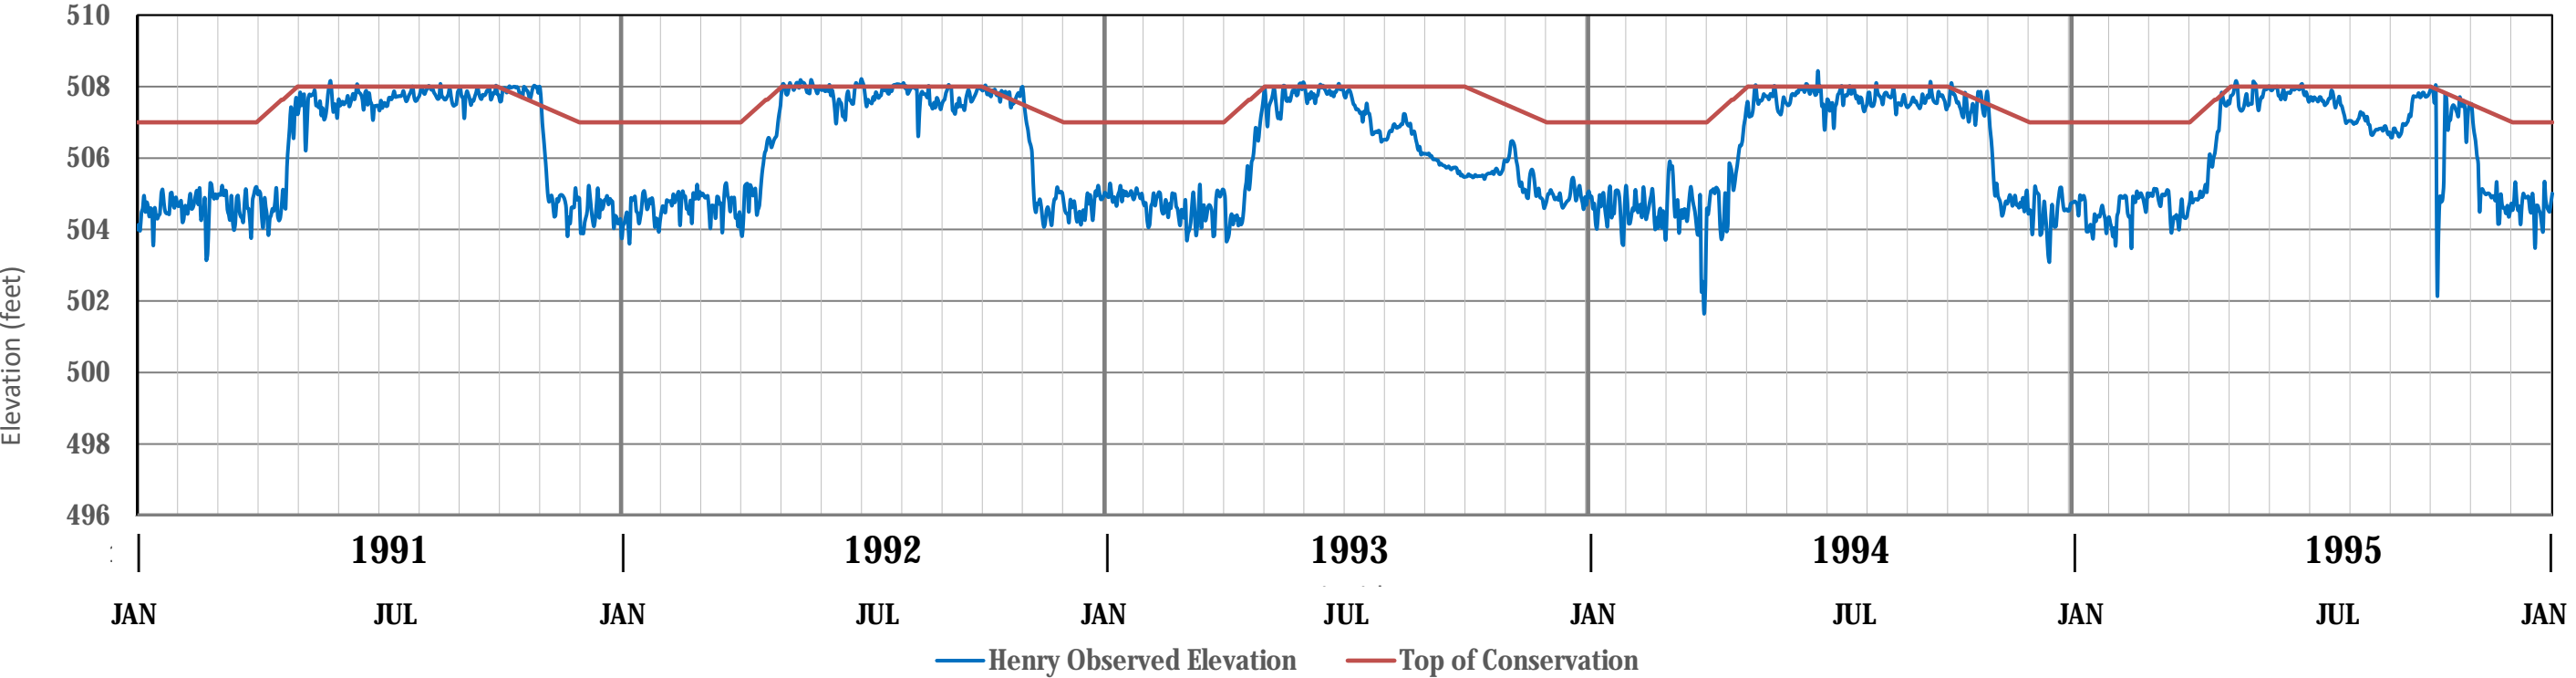

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

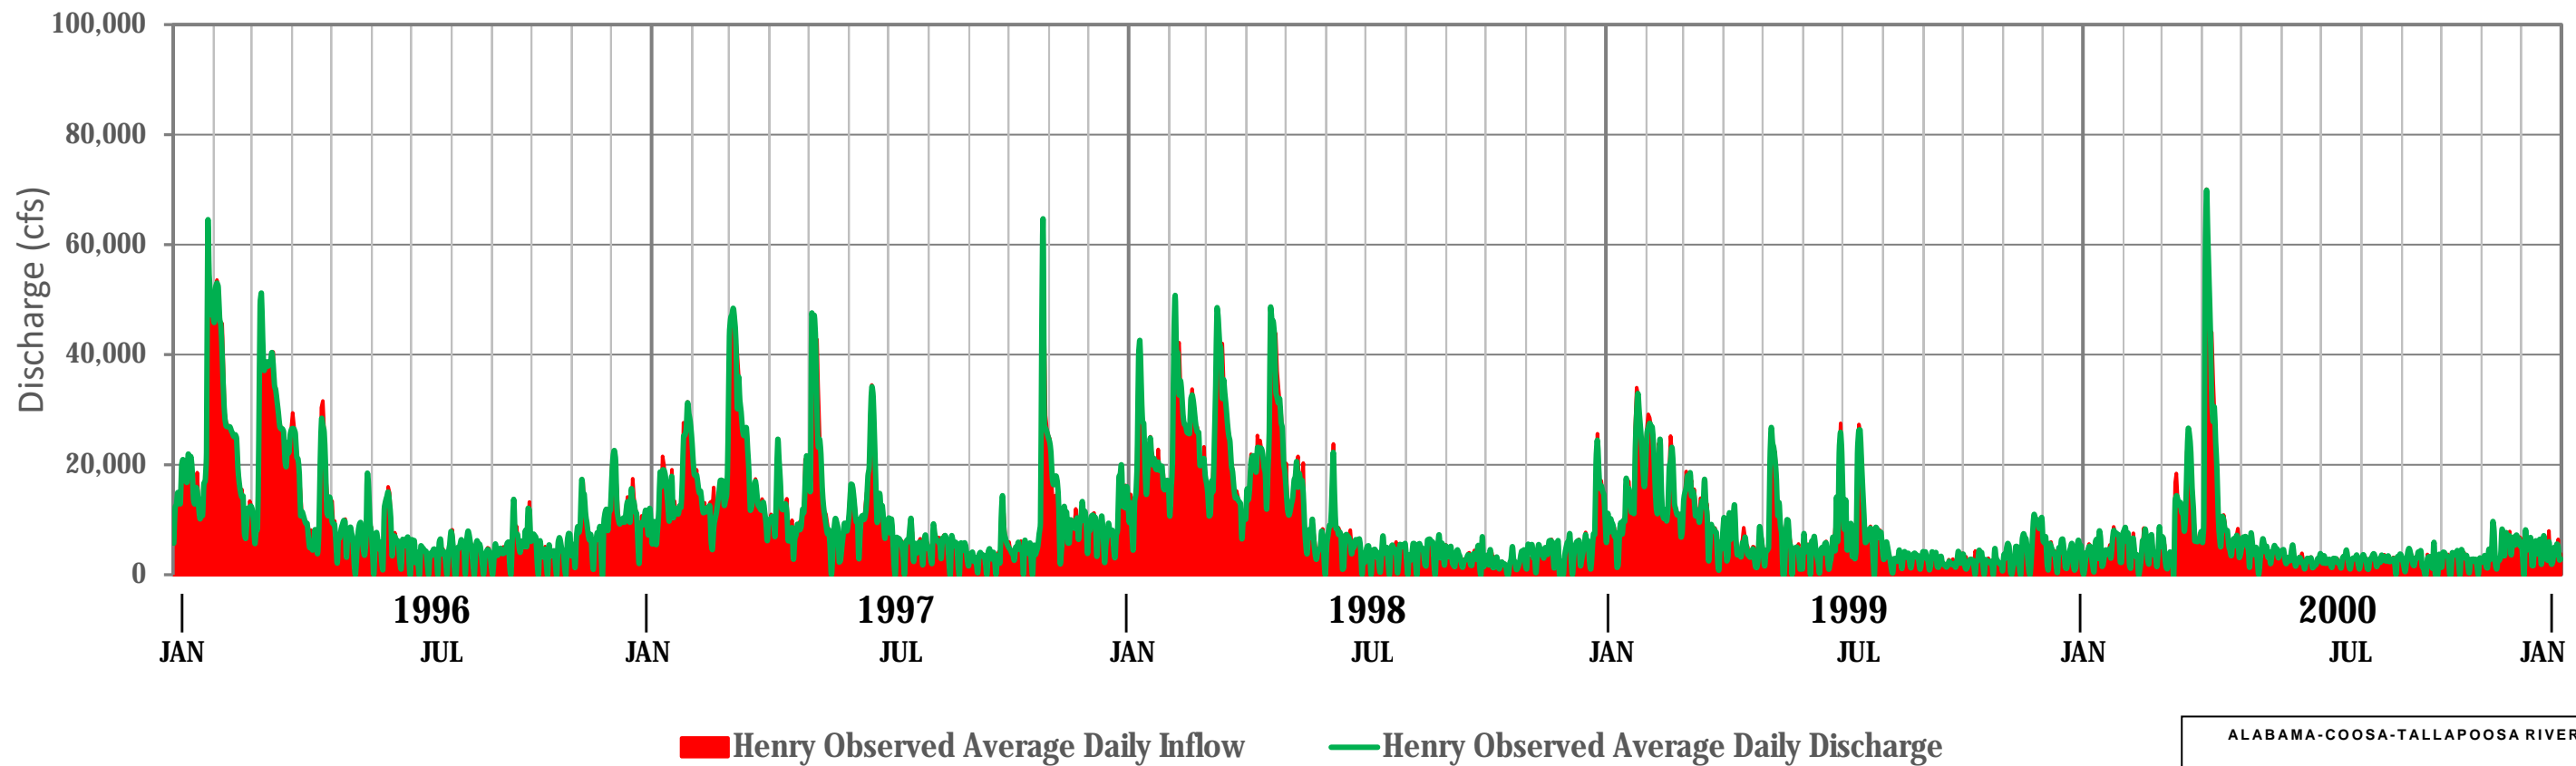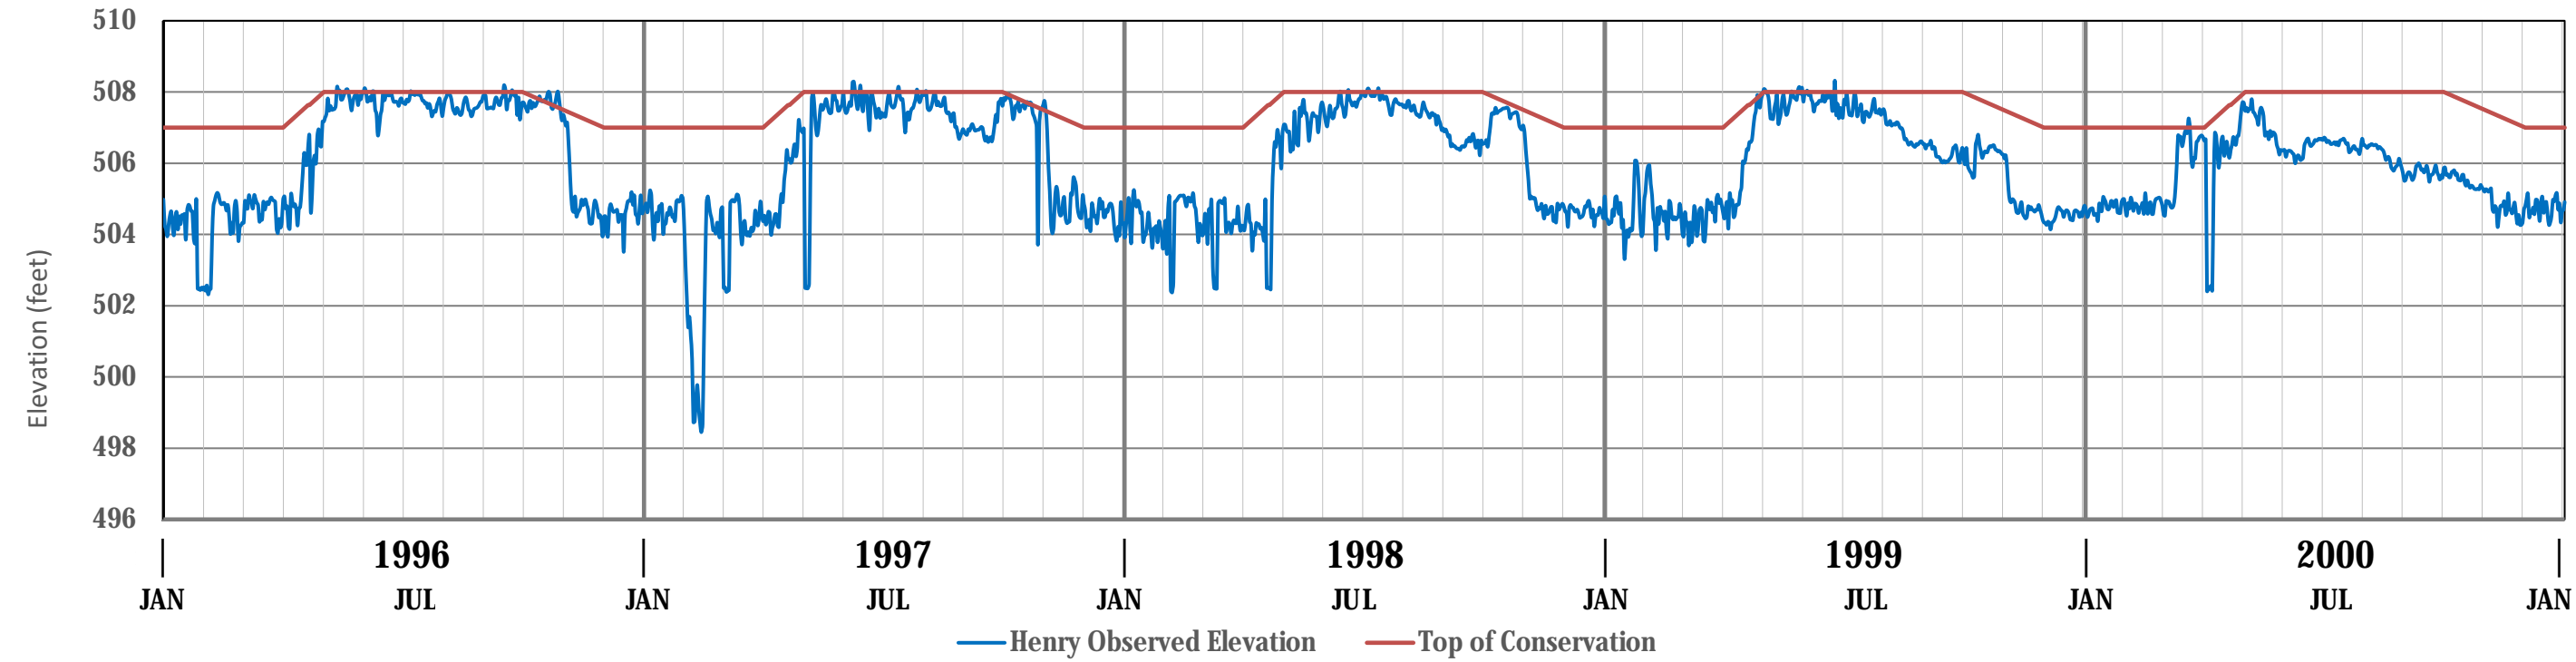

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE

INFLOW-OUTFLOW-POOL
HYDROGRAPH

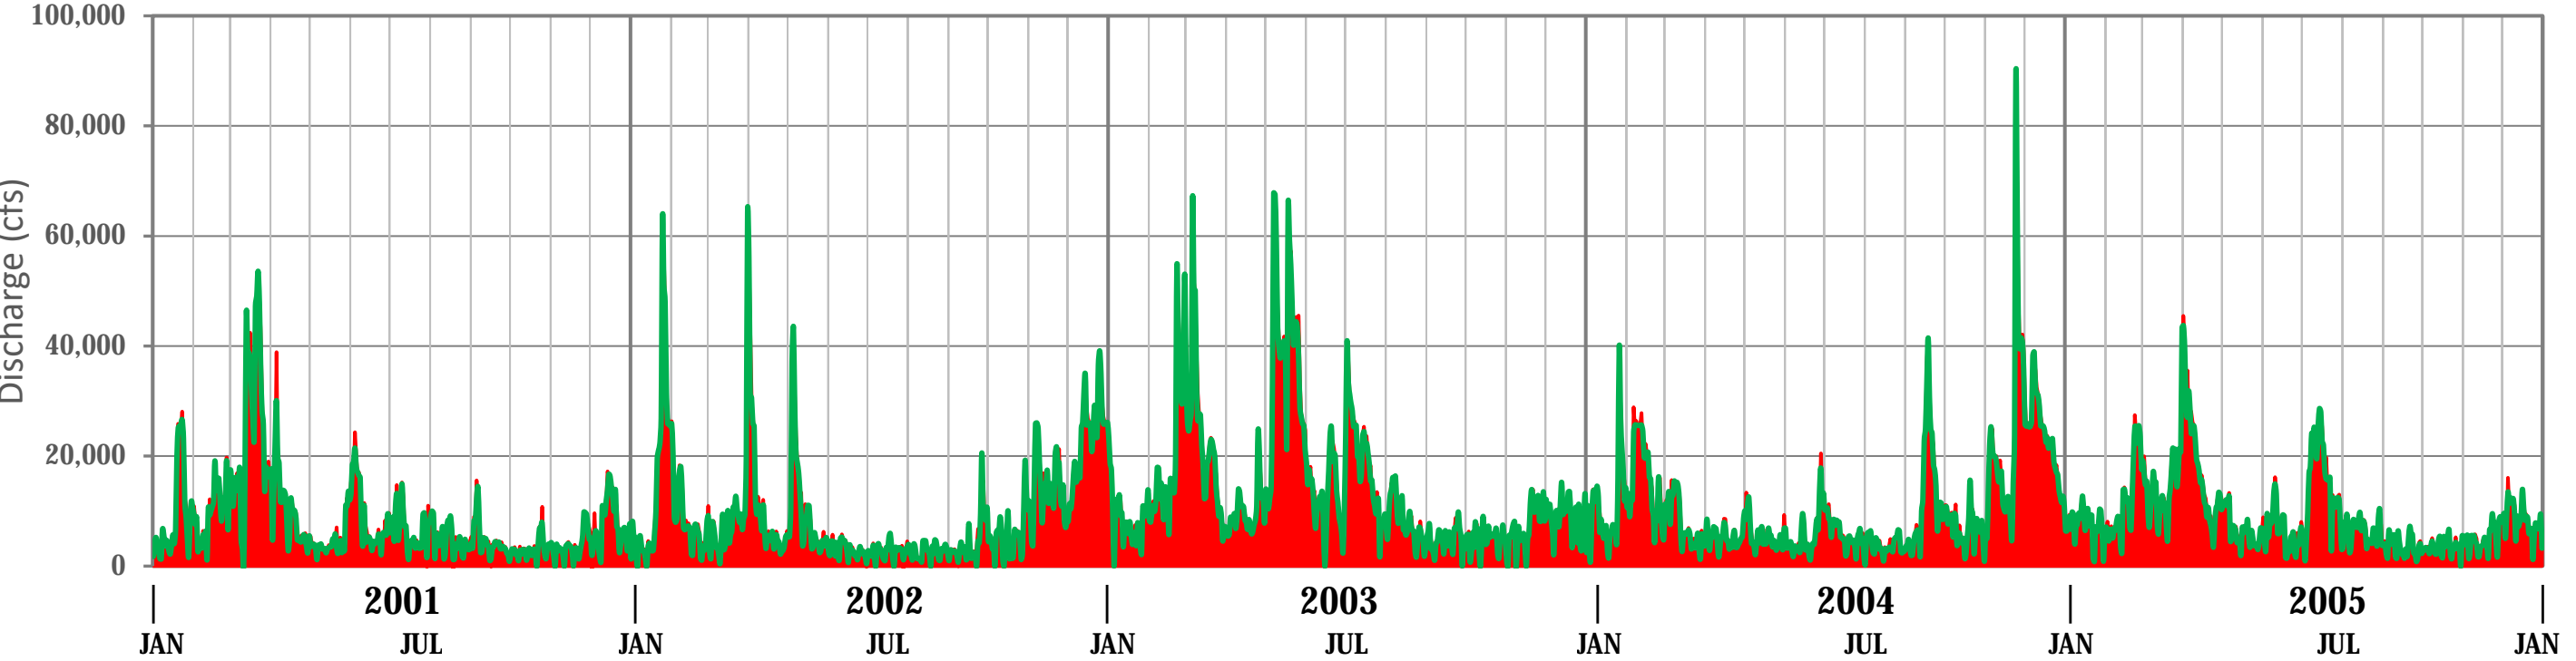
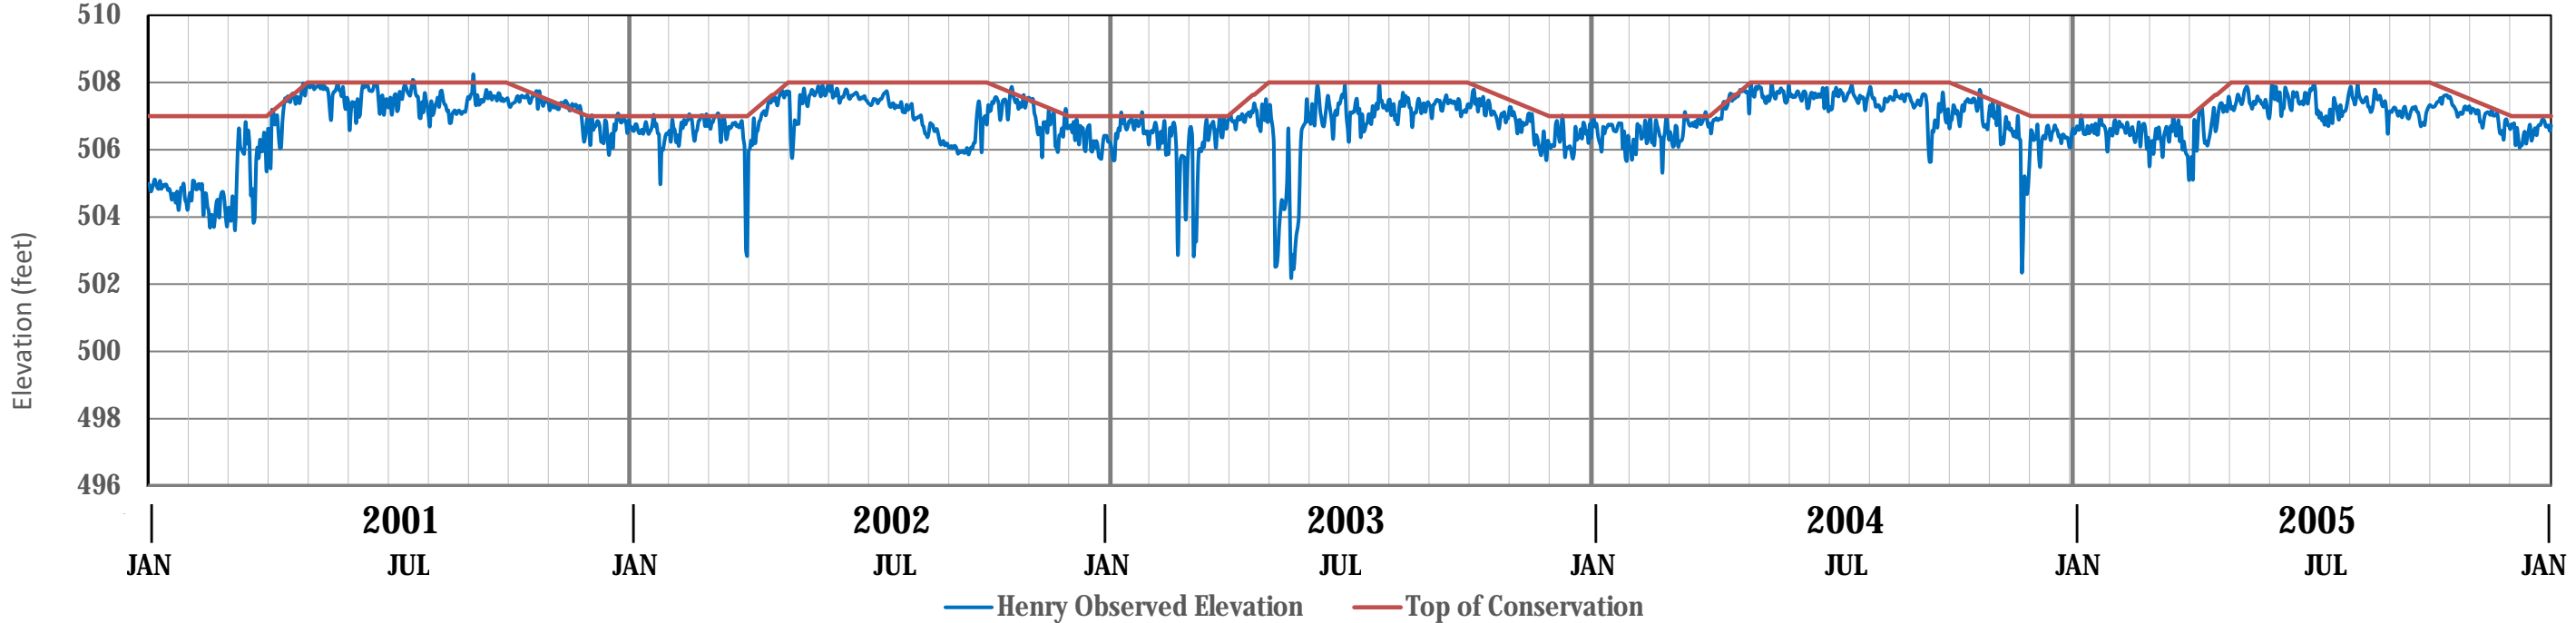


Henry Observed Average Daily Inflow Henry Observed Average Daily Discharge

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

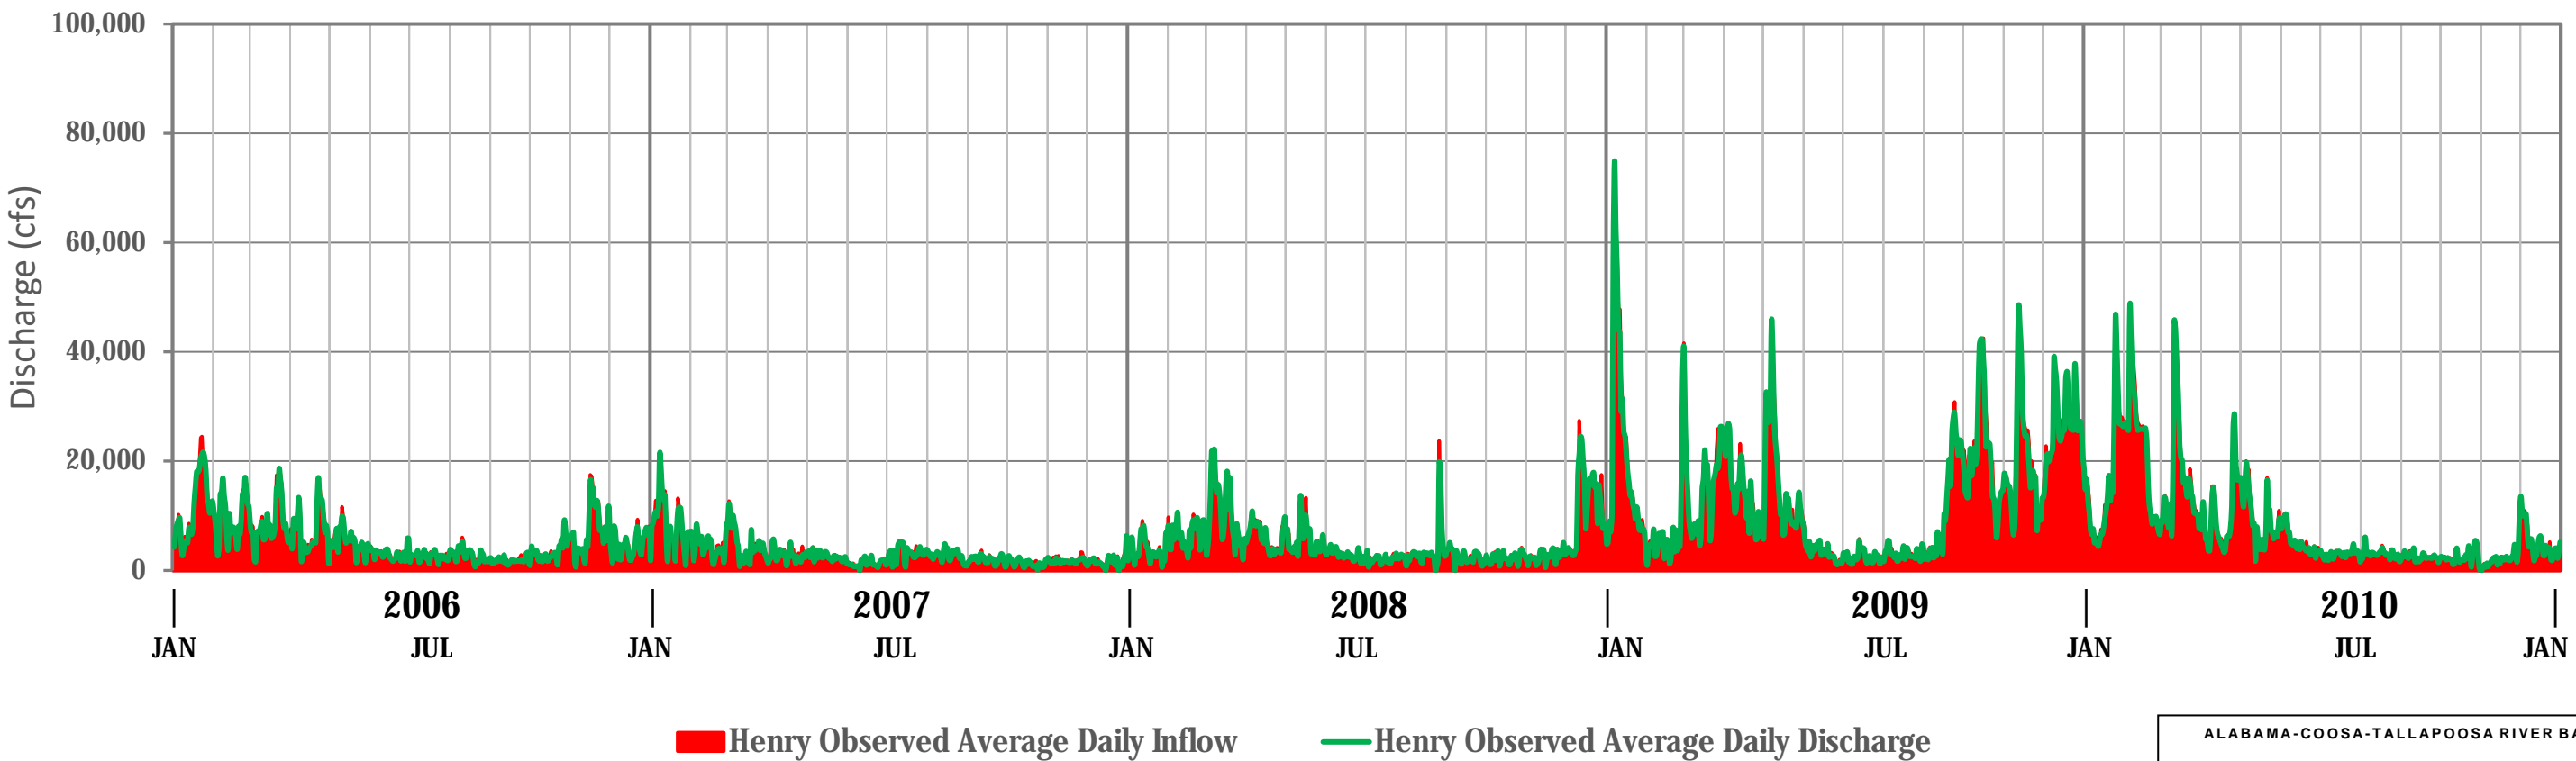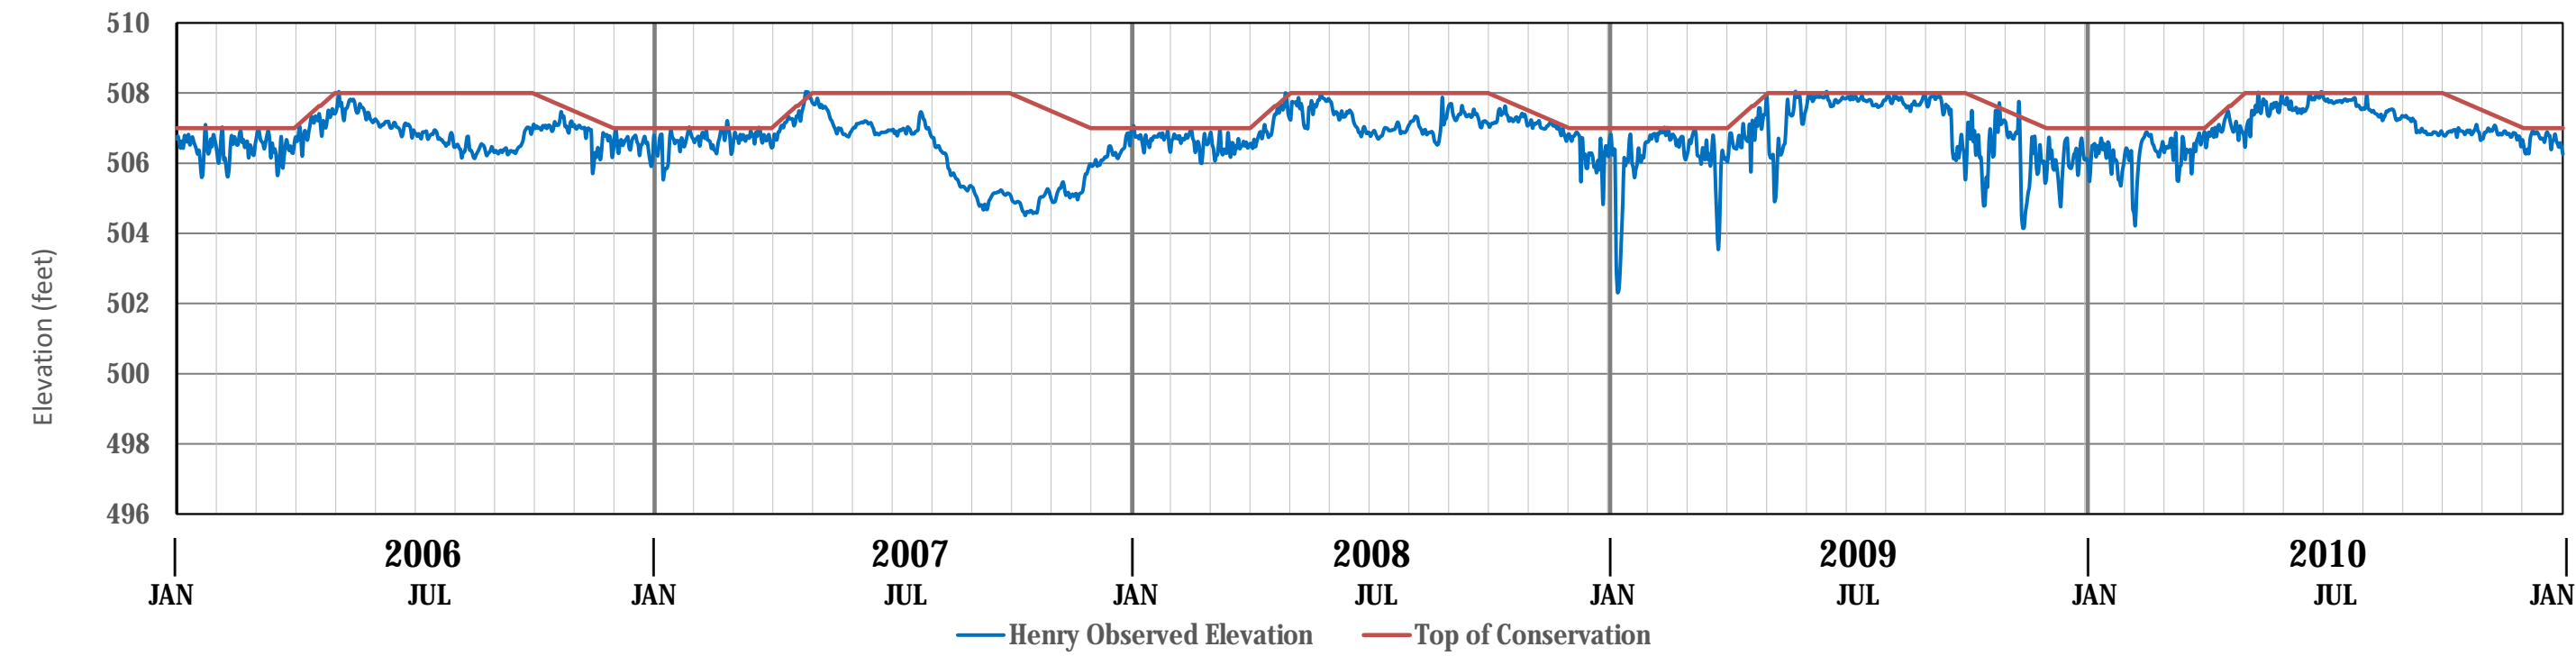

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE



INFLOW-OUTFLOW-POOL
HYDROGRAPH

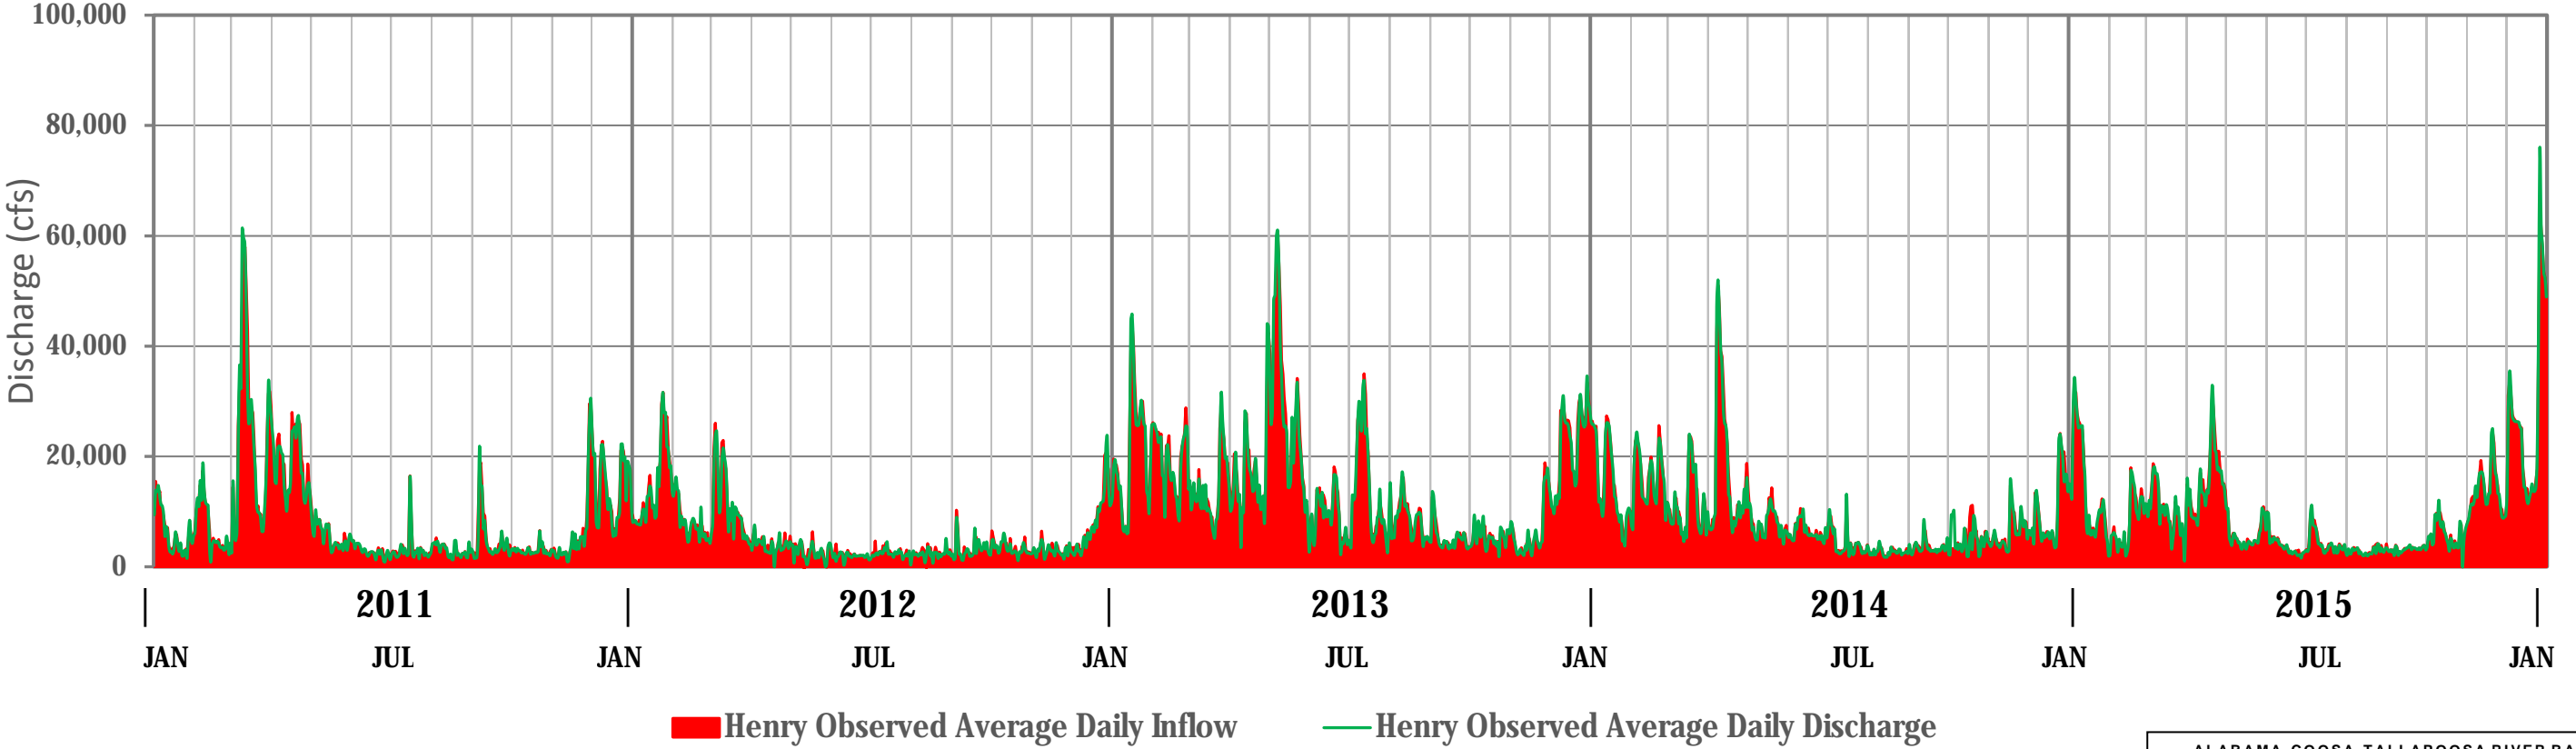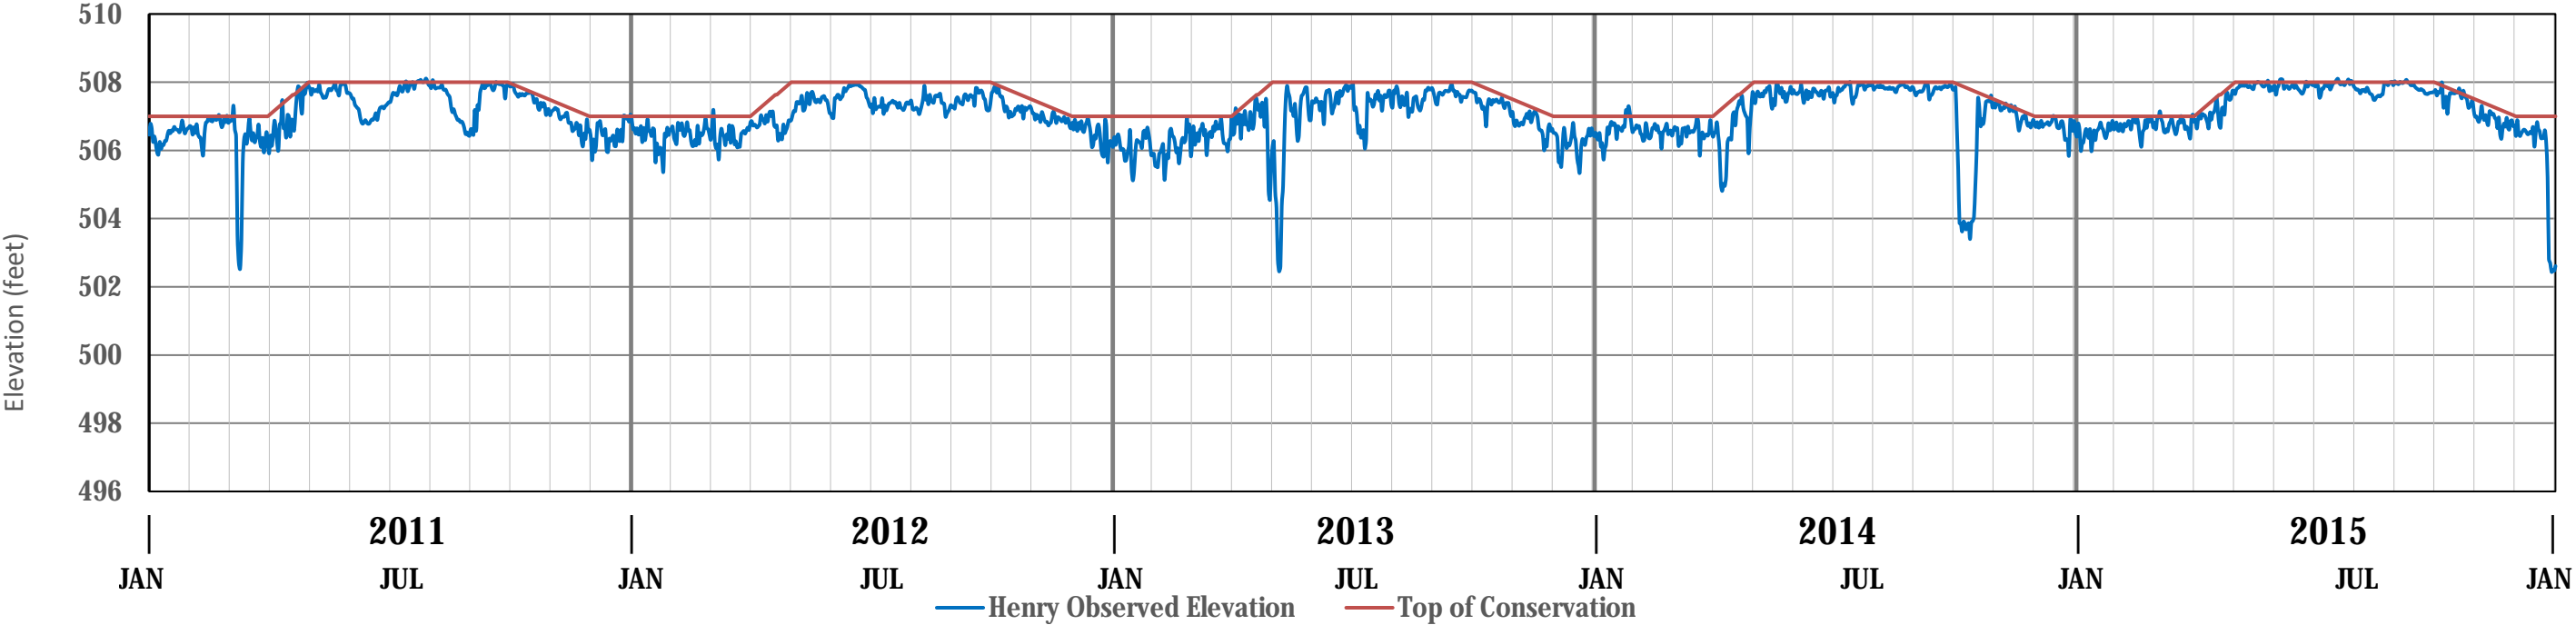

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE




INFLOW-OUTFLOW-POOL
HYDROGRAPH

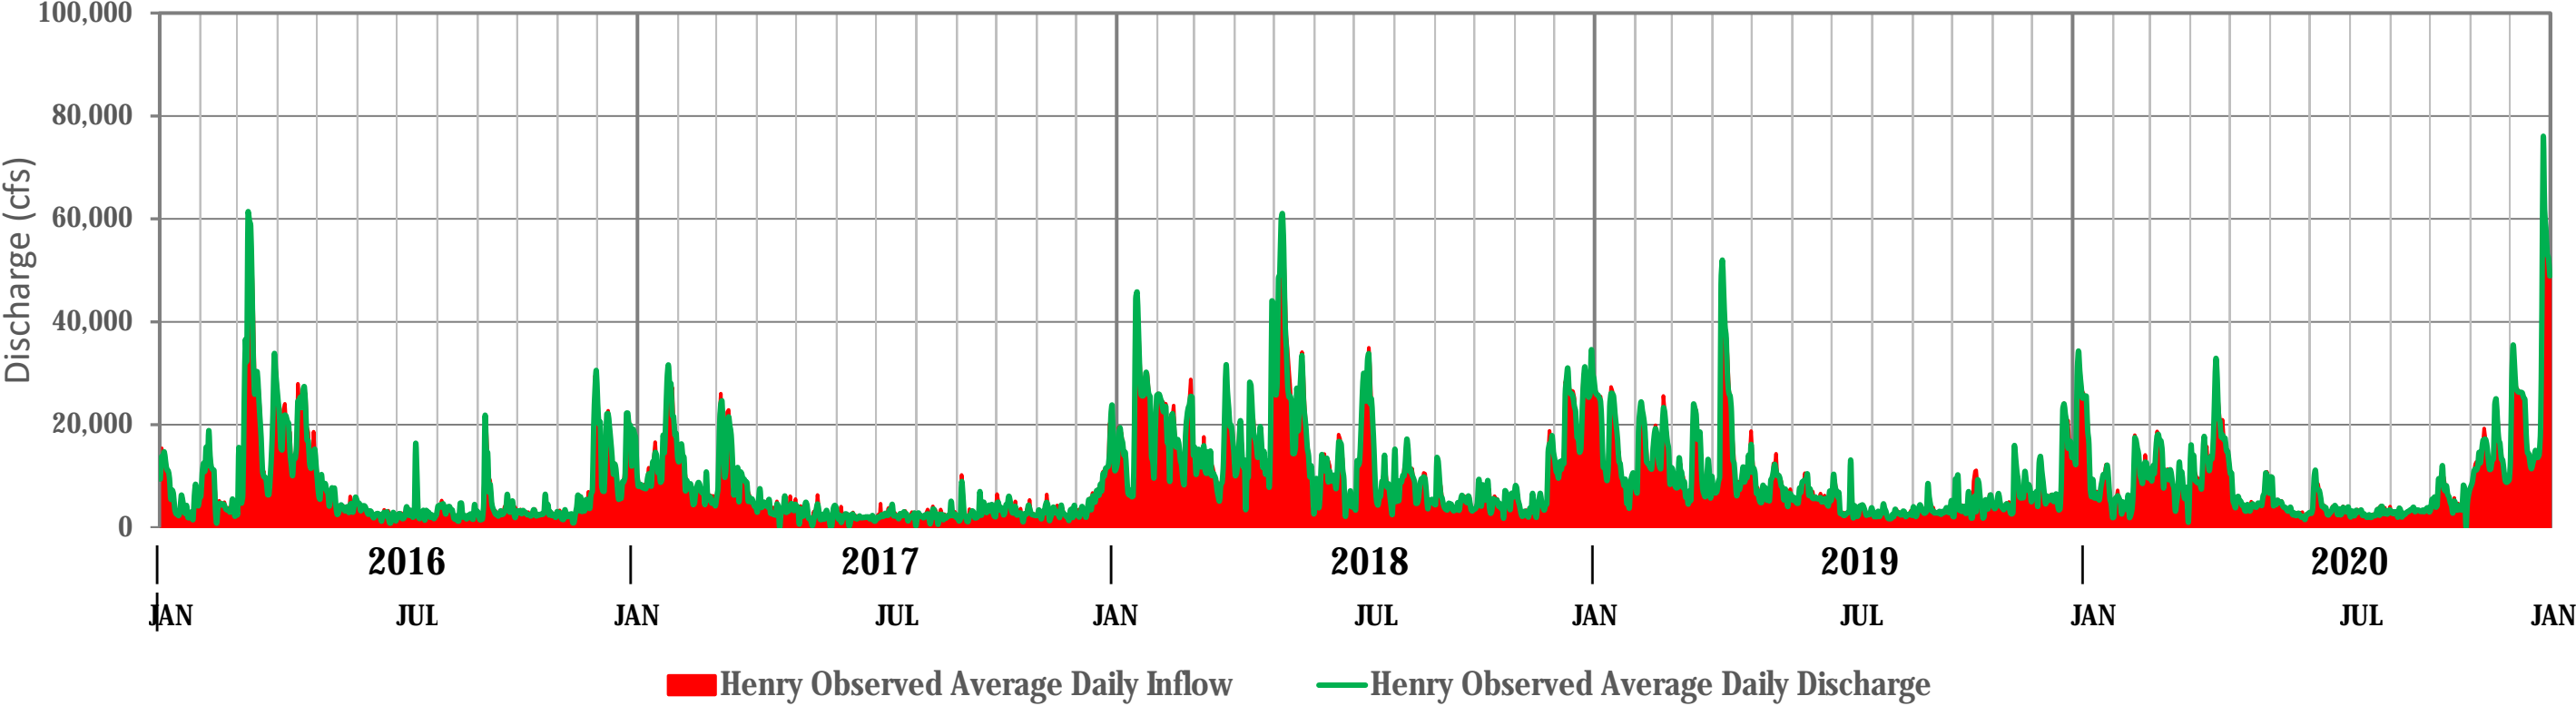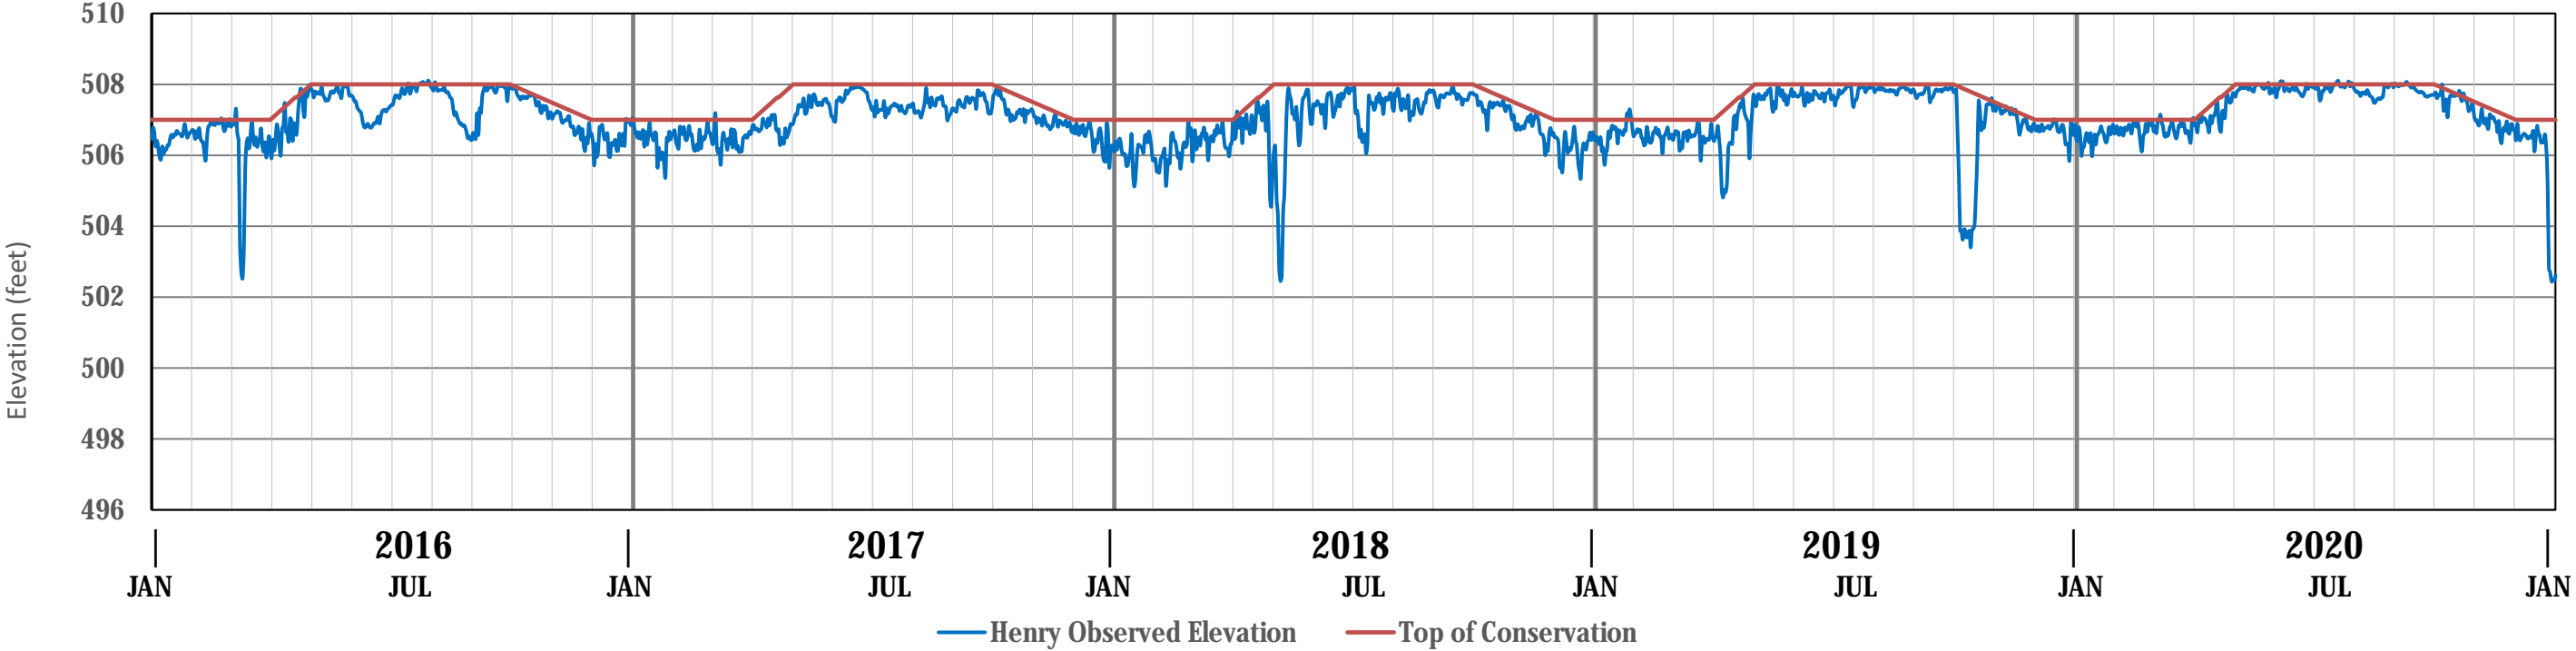

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE


INFLOW-OUTFLOW-POOL
HYDROGRAPH

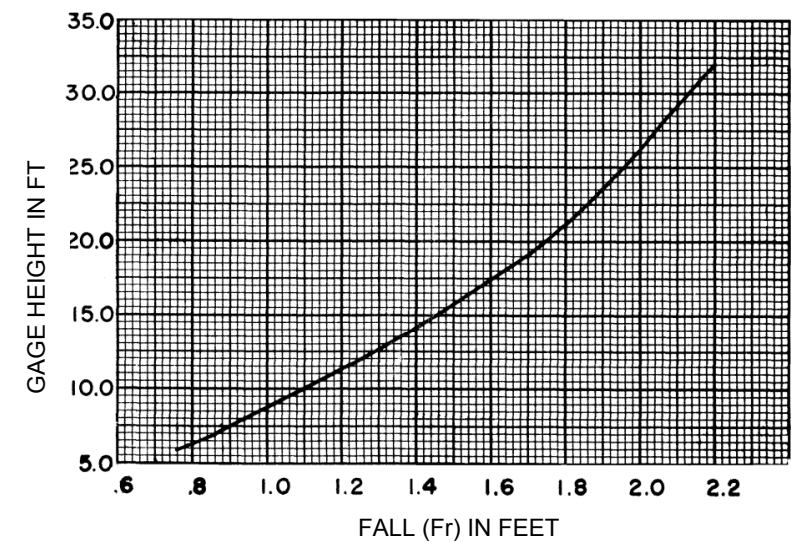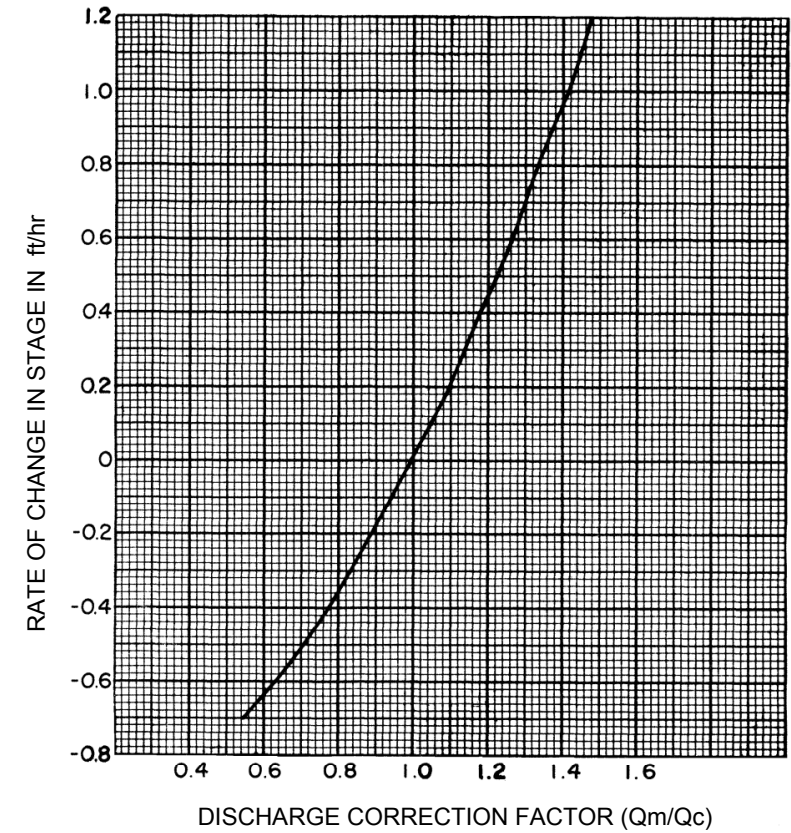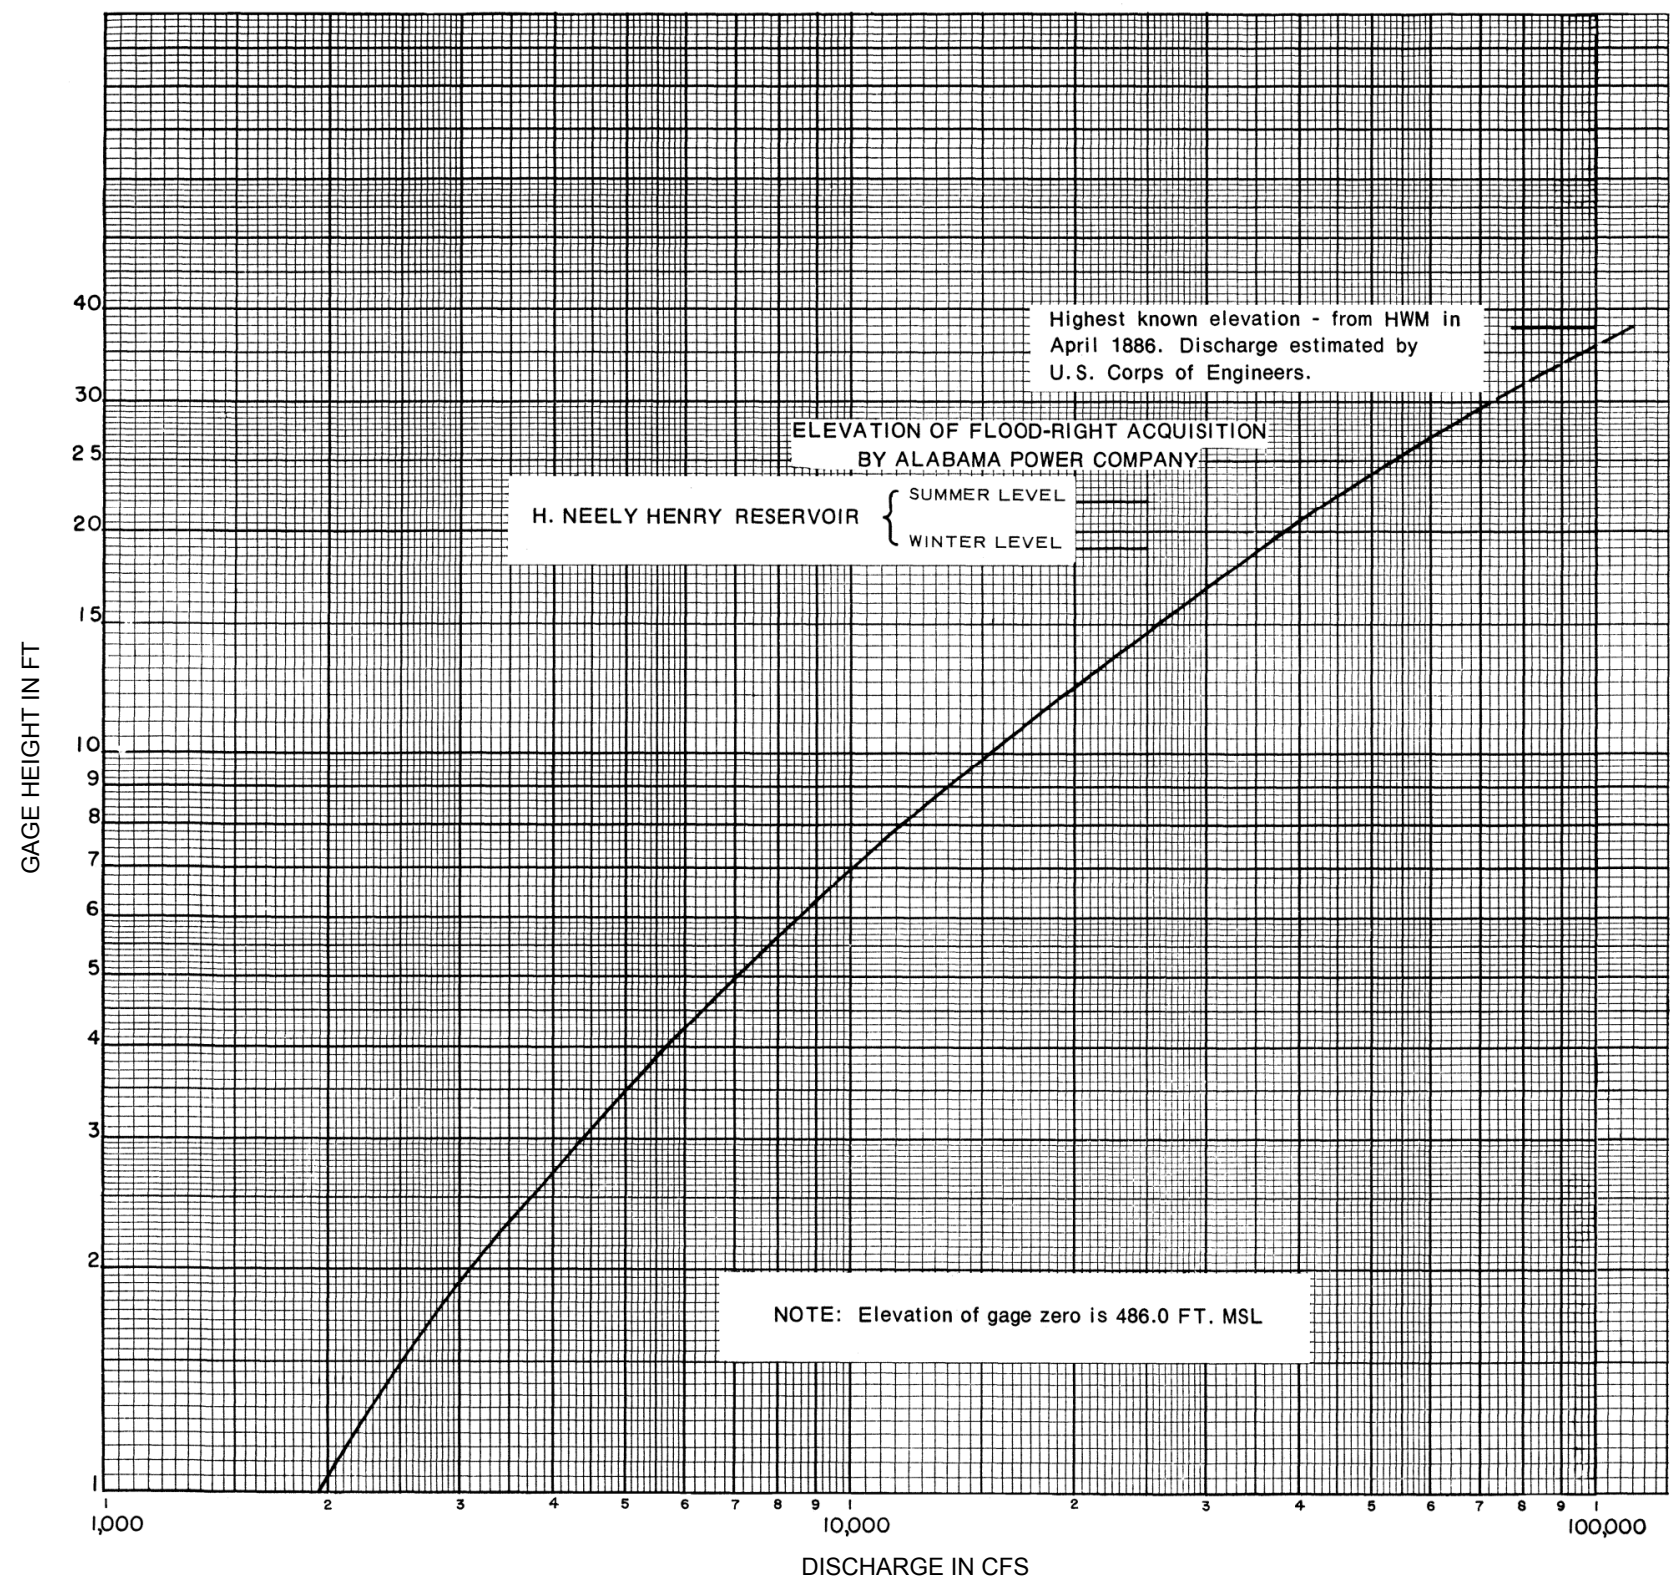

Note: Due to backwater effects caused by tributary inflow below the gage, discharge at this station is determined as follows:

- DISCHARGE LESS THAN 15,000 cfs — If the rate of change in stage is less than 0.07 ft/hr, read the discharge directly from the rating curve. If the rate of change is 0.07 ft/hr or greater, multiply the value taken from the rating curve by the discharge correction factor from the Rate of change curve.
- DISCHARGE GREATER THAN 15,000 cfs ---- Use the formula, $Q=(F/Fr)^{0.5} \times Qc$ where F = Fall in feet between Alabama Power Co steam plant gage and the Gadsden gage.
Fr = Fall from the Fall Curve
Qc = Discharge from the rating curve

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**RATING CURVE FOR COOSA RIVER
AT GADSDEN, AL**

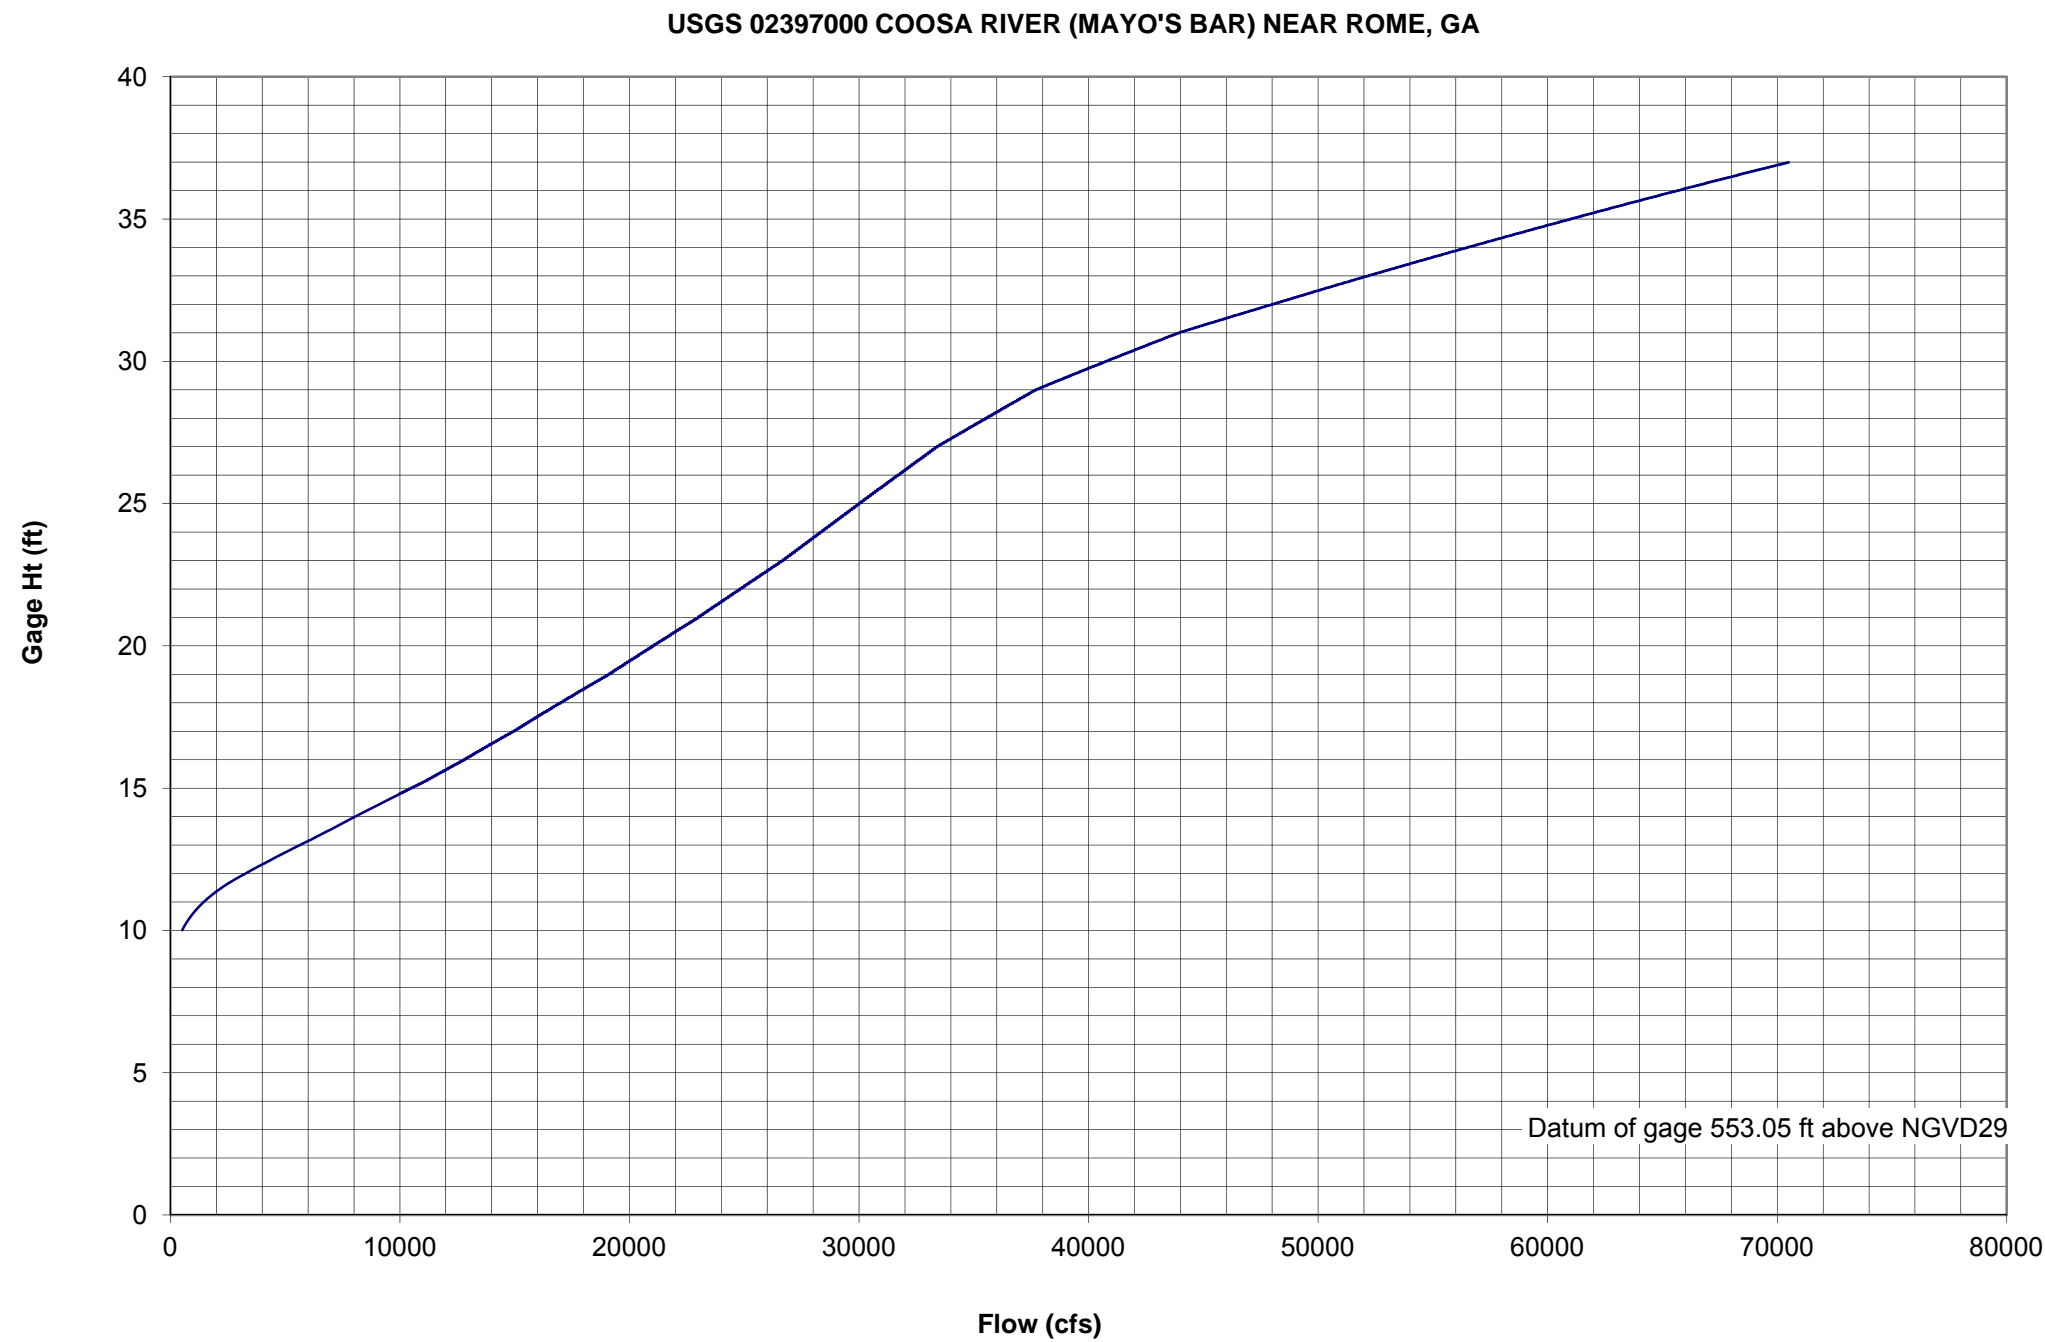


USGS GAGE 02397000			
FLOW	GAGE HT	FLOW	GAGE HT
(cfs)	(ft)		
		17000	18
510	10	21000	20
722	10.3	24800	22
894	10.5	28300	24
1090	10.7	31700	26
1450	11	33400	27
1890	11.3	35500	28
2230	11.5	37700	29
2610	11.7	40800	30
3280	12	48000	32
5640	13	56500	34
8050	14	65700	36
12800	16	70500	37

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN


WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE

**RATING CURVE FOR
COOSA RIVER AT ROME, GA**

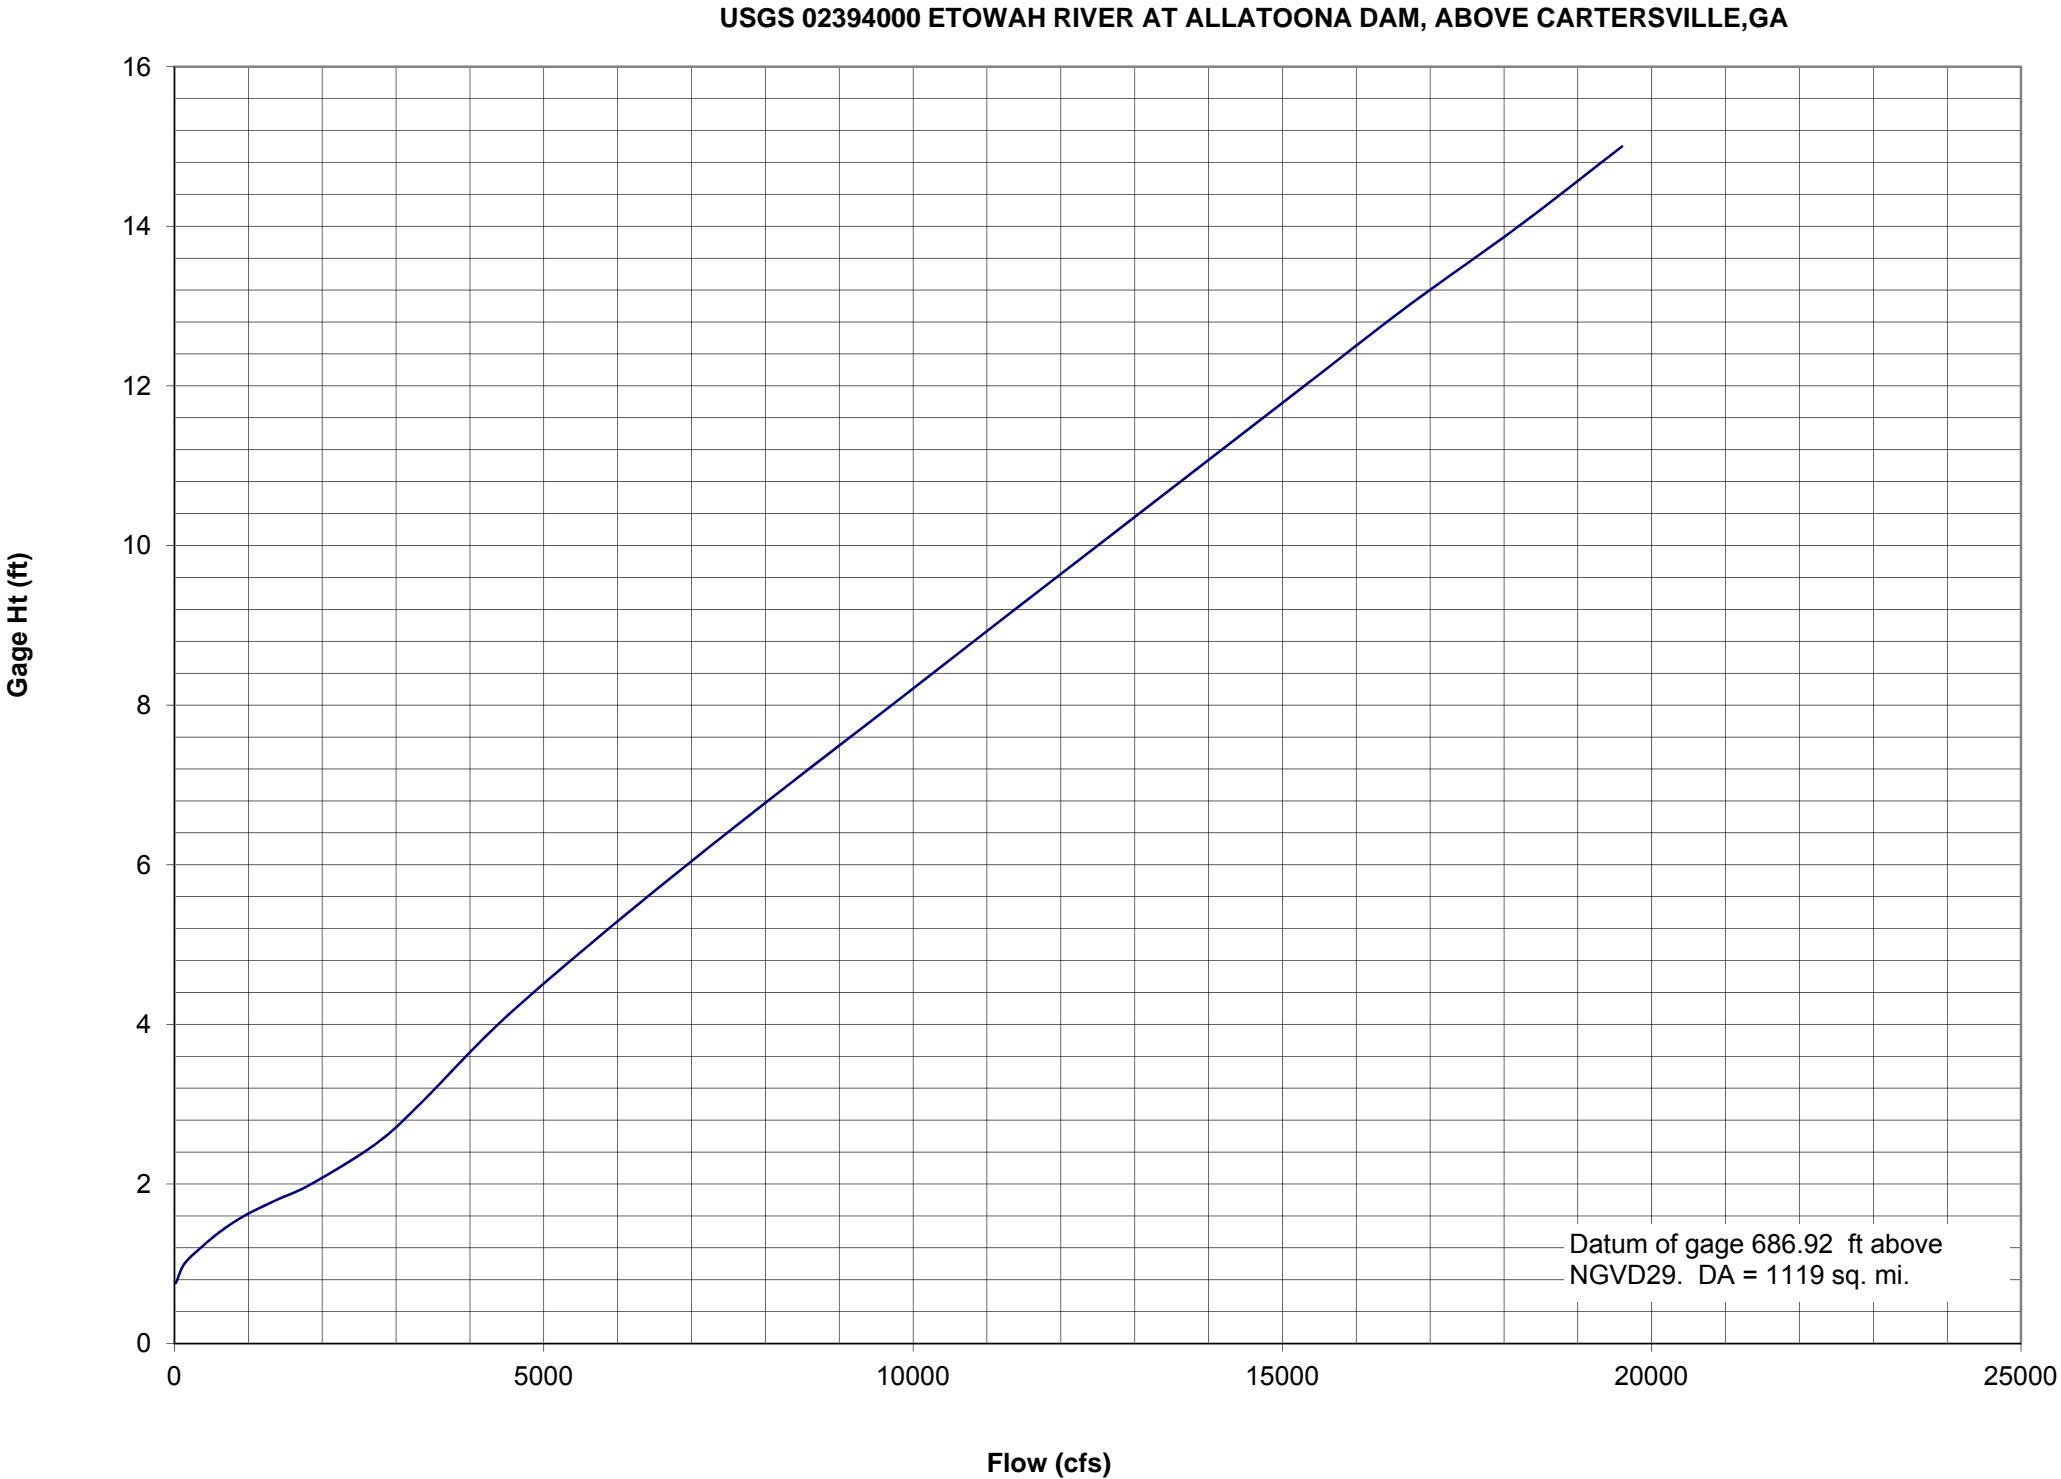

Flow	Gage Ht
18	0.76
133	1
354	1.2
613	1.4
941	1.6
1380	1.8
1850	2
2720	2.5
3320	3
4380	4
5620	5
6940	6
8310	7
9710	8
11100	9
12500	10
13900	11
15300	12
16700	13
18200	14
19600	15

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**RATING CURVE AT ETOWAH RIVER
AT ALLATOONA DAM
ABOVE CARTERSVILLE**

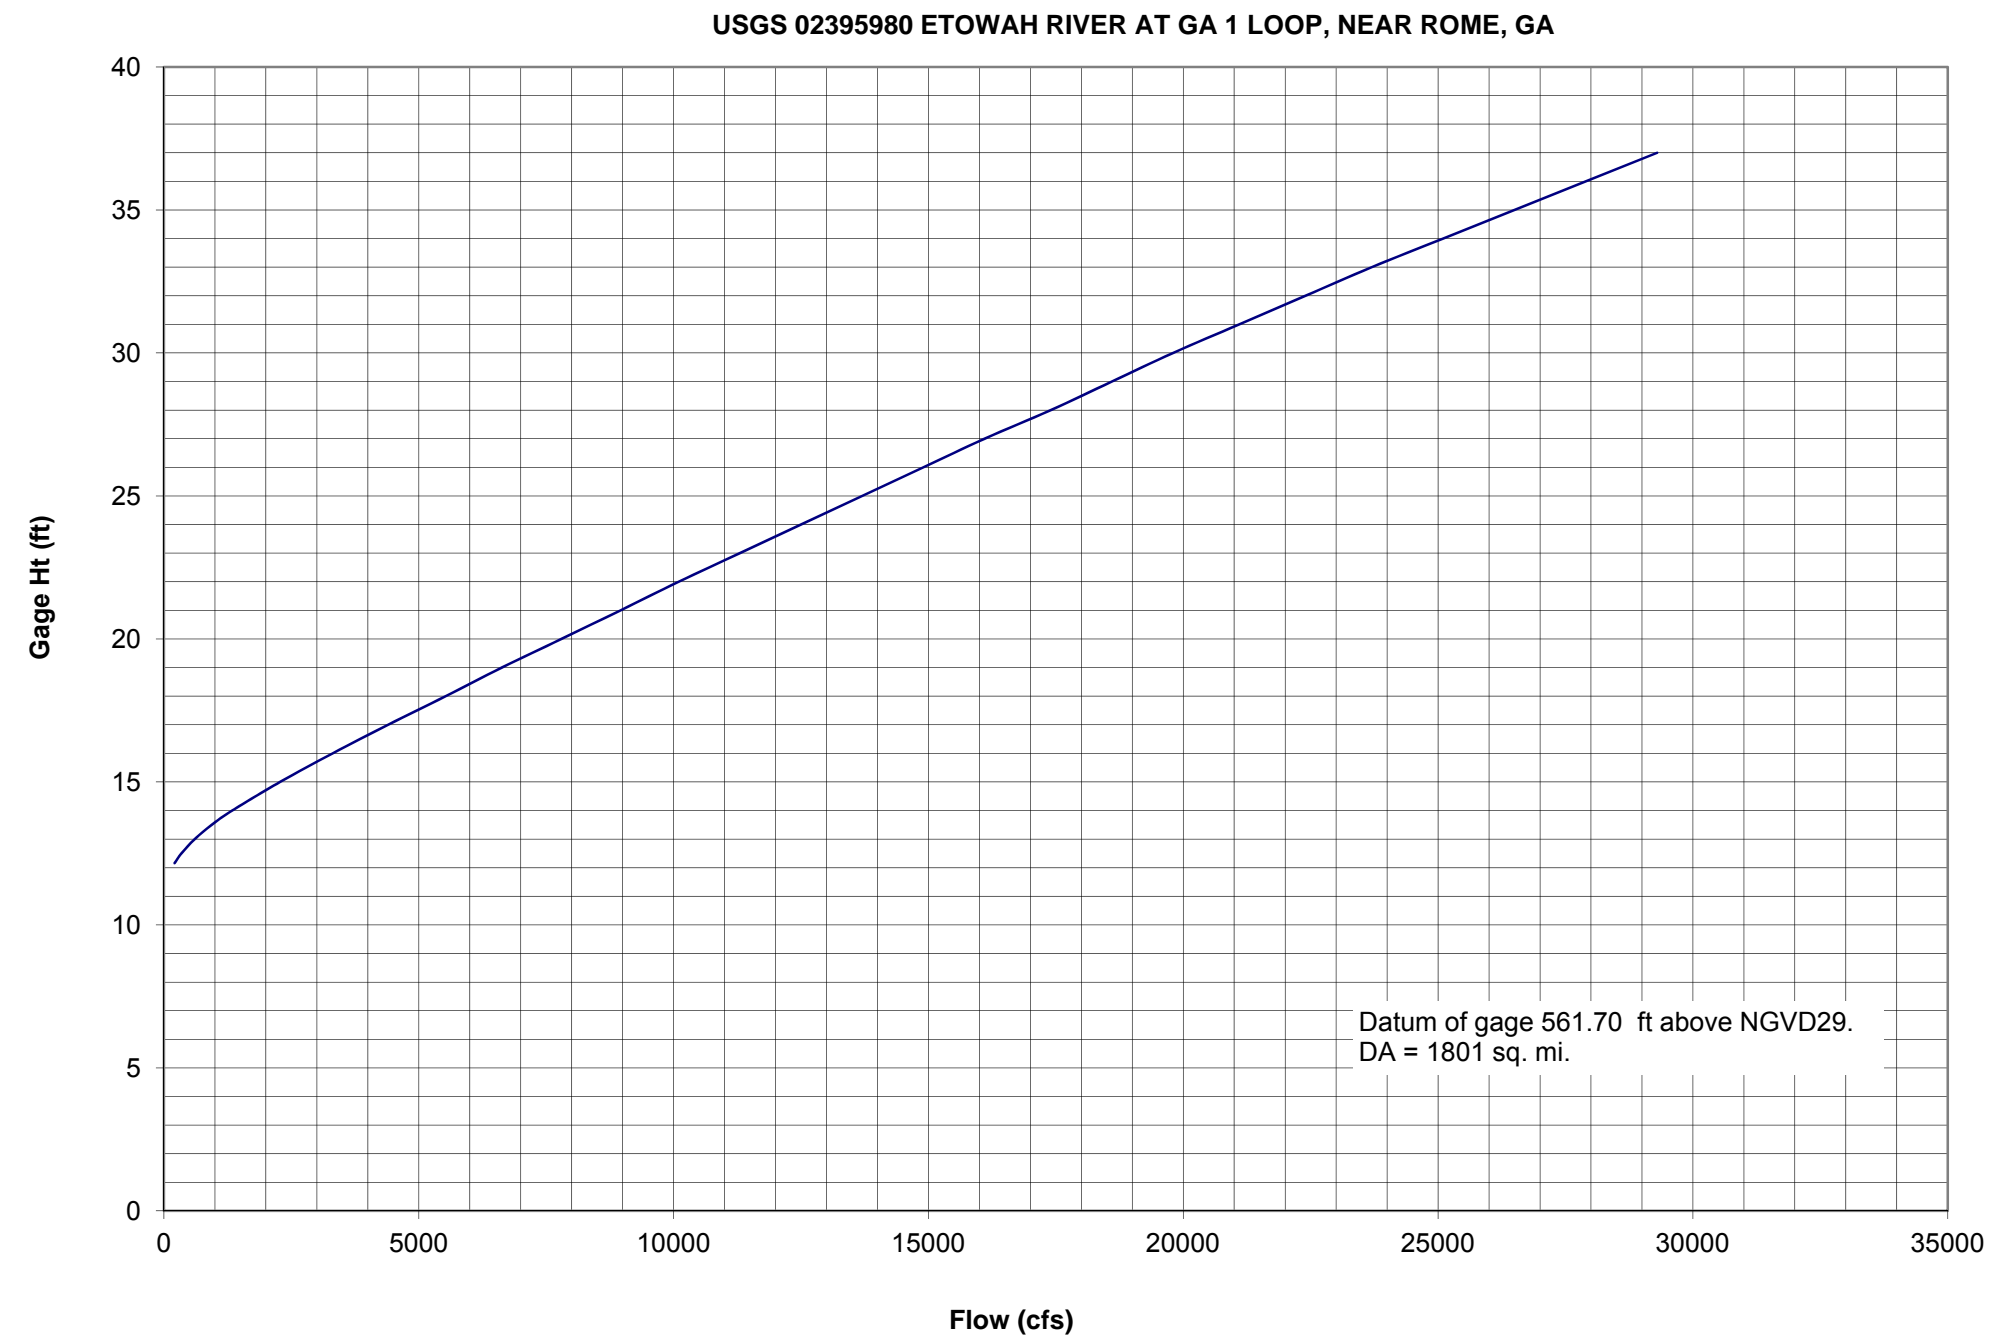


Flow	Gage Ht
210	12.16
343	12.5
604	13
938	13.5
1340	14
2280	15
3310	16
4400	17
5530	18
6630	19
7800	20
8960	21
10100	22
11300	23
12500	24
13700	25
14900	26
16100	27
17400	28
18600	29
19800	30
21100	31
22400	32
23700	33
25100	34
26500	35
27900	36
29300	37

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE

**RATING CURVE AT ETOWAH RIVER
AT GA 1 LOOP NEAR ROME, GA**

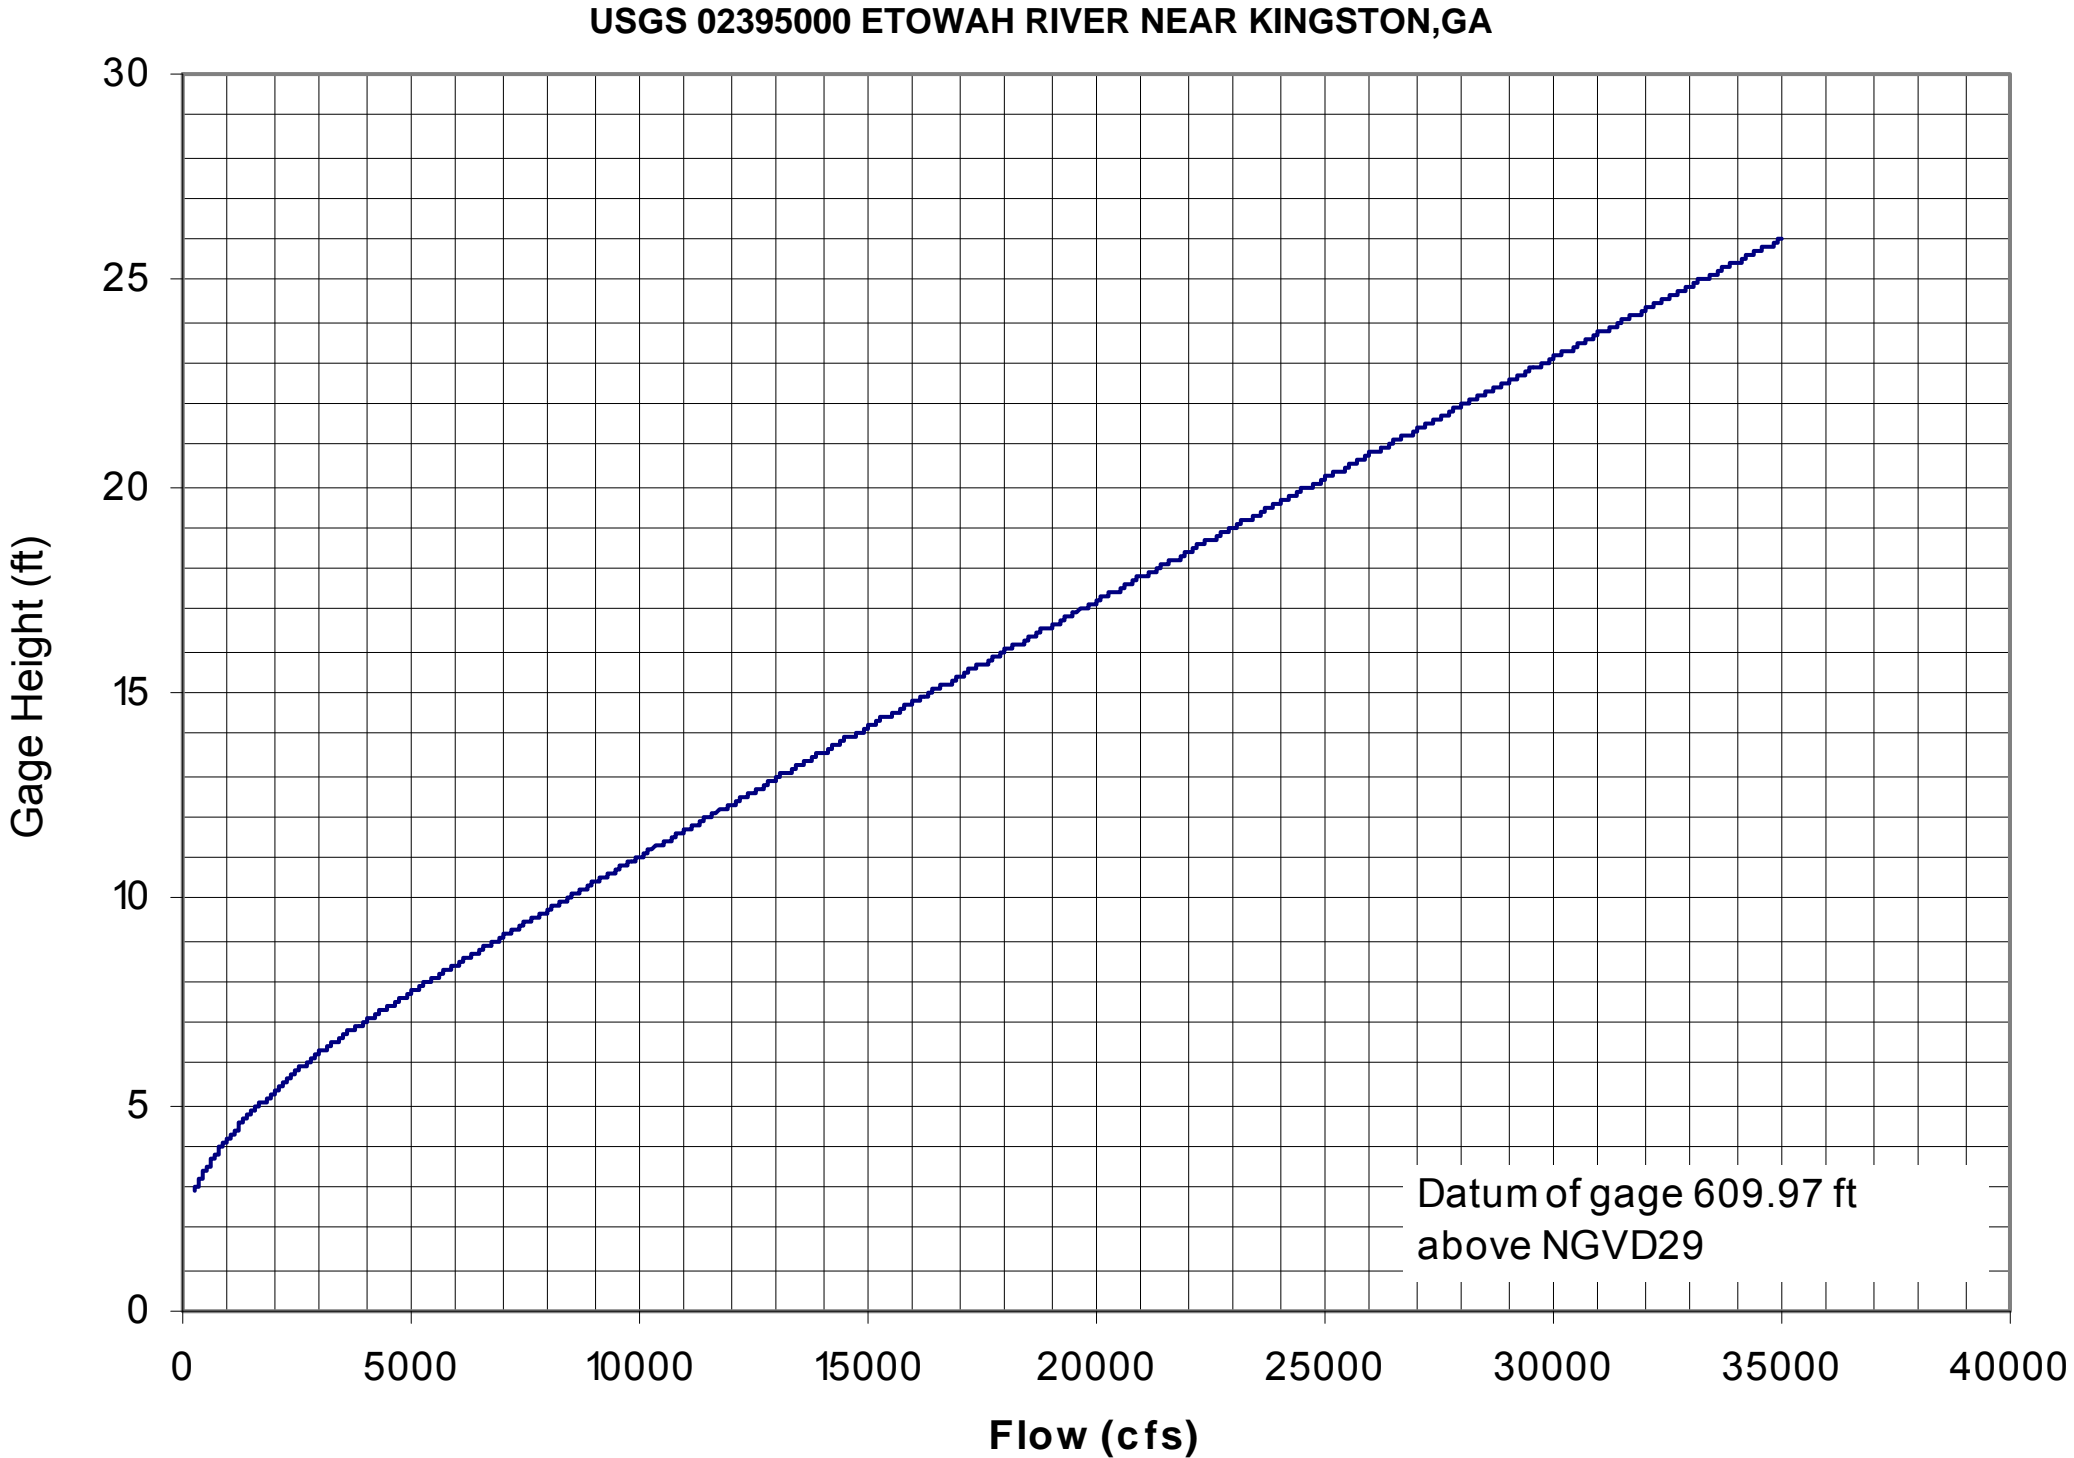


USGS GAGE
02395000

FLOW (cfs)	GAGE HT (ft)
256	2.9
300	3
550	3.5
860	4
1700	5
2700	6
3980	7
5400	8
6900	9
8420	10
11500	12
14700	14
18000	16
21300	18
24700	20
28100	22
31500	24
35000	26

USGS GAGE 02395000
ETOWAH RIVER NEAR KINGSTON
DA 1634 sq. mi. Datum 609.97 ft NGVD29


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**RATING CURVE FOR
ETOWAH RIVER AT KINGSTON**

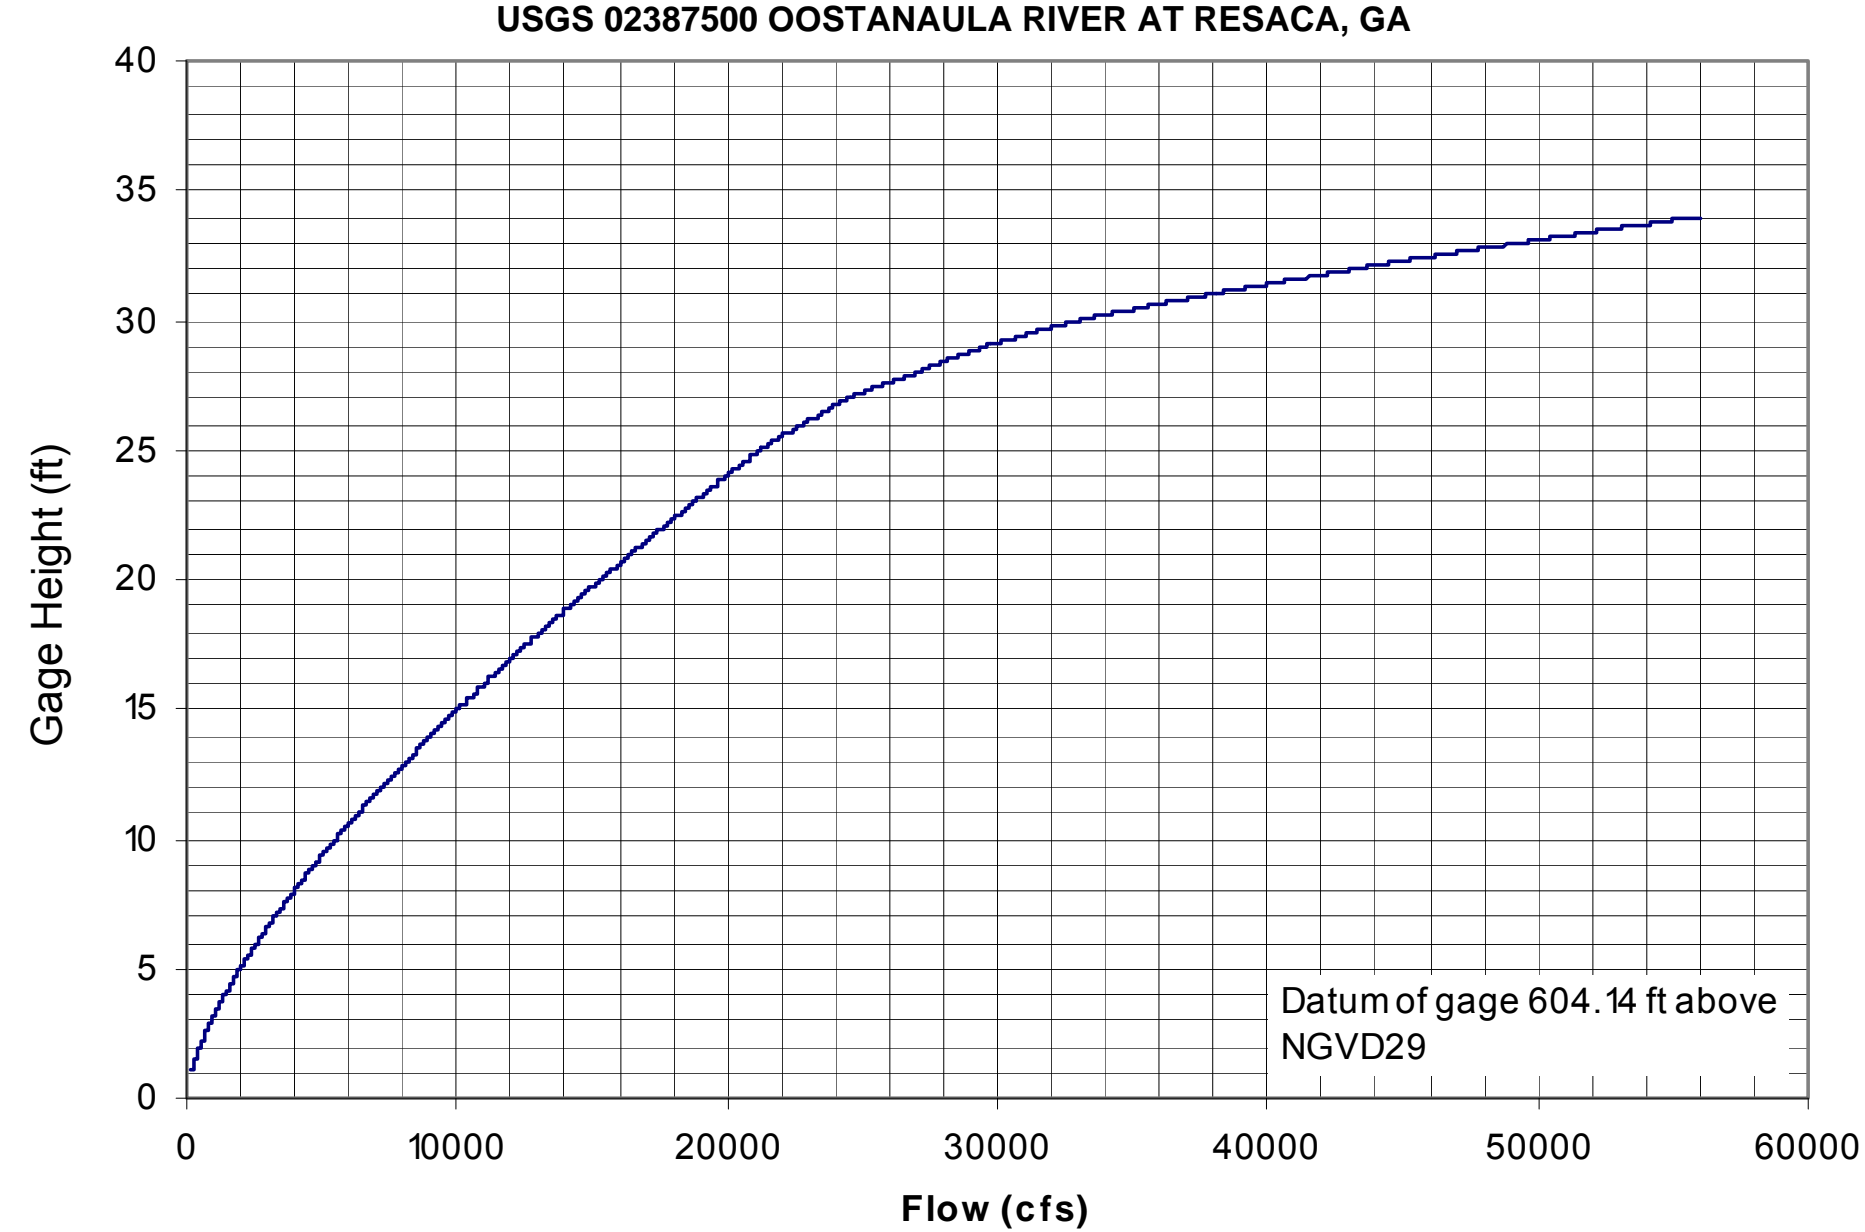

USGS GAGE 02387500		USGS GAGE 02387500	
FLOW (cfs)	GAGE HT (ft)	FLOW (cfs)	GAGE HT (ft)
190	1.04	9080	14
207	1.1	11000	16
329	1.5	13100	18
505	2	15300	20
704	2.5	17600	22
922	3	20000	24
1430	4	21200	25
1990	5	22800	26
2600	6	24500	27
3260	7	27000	28
3980	8	29600	29
4730	9	33000	30
5530	10	37900	31
6360	11	43400	32
7240	12	49400	33
		56000	34

USGS GAGE 02387500
OOSTANAULA RIVER AT RESACA
DA 1602 sq. mi. Datum 604.14 ft NGVD29

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**RATING CURVE FOR
OOSTANAULA RIVER AT RESACA**

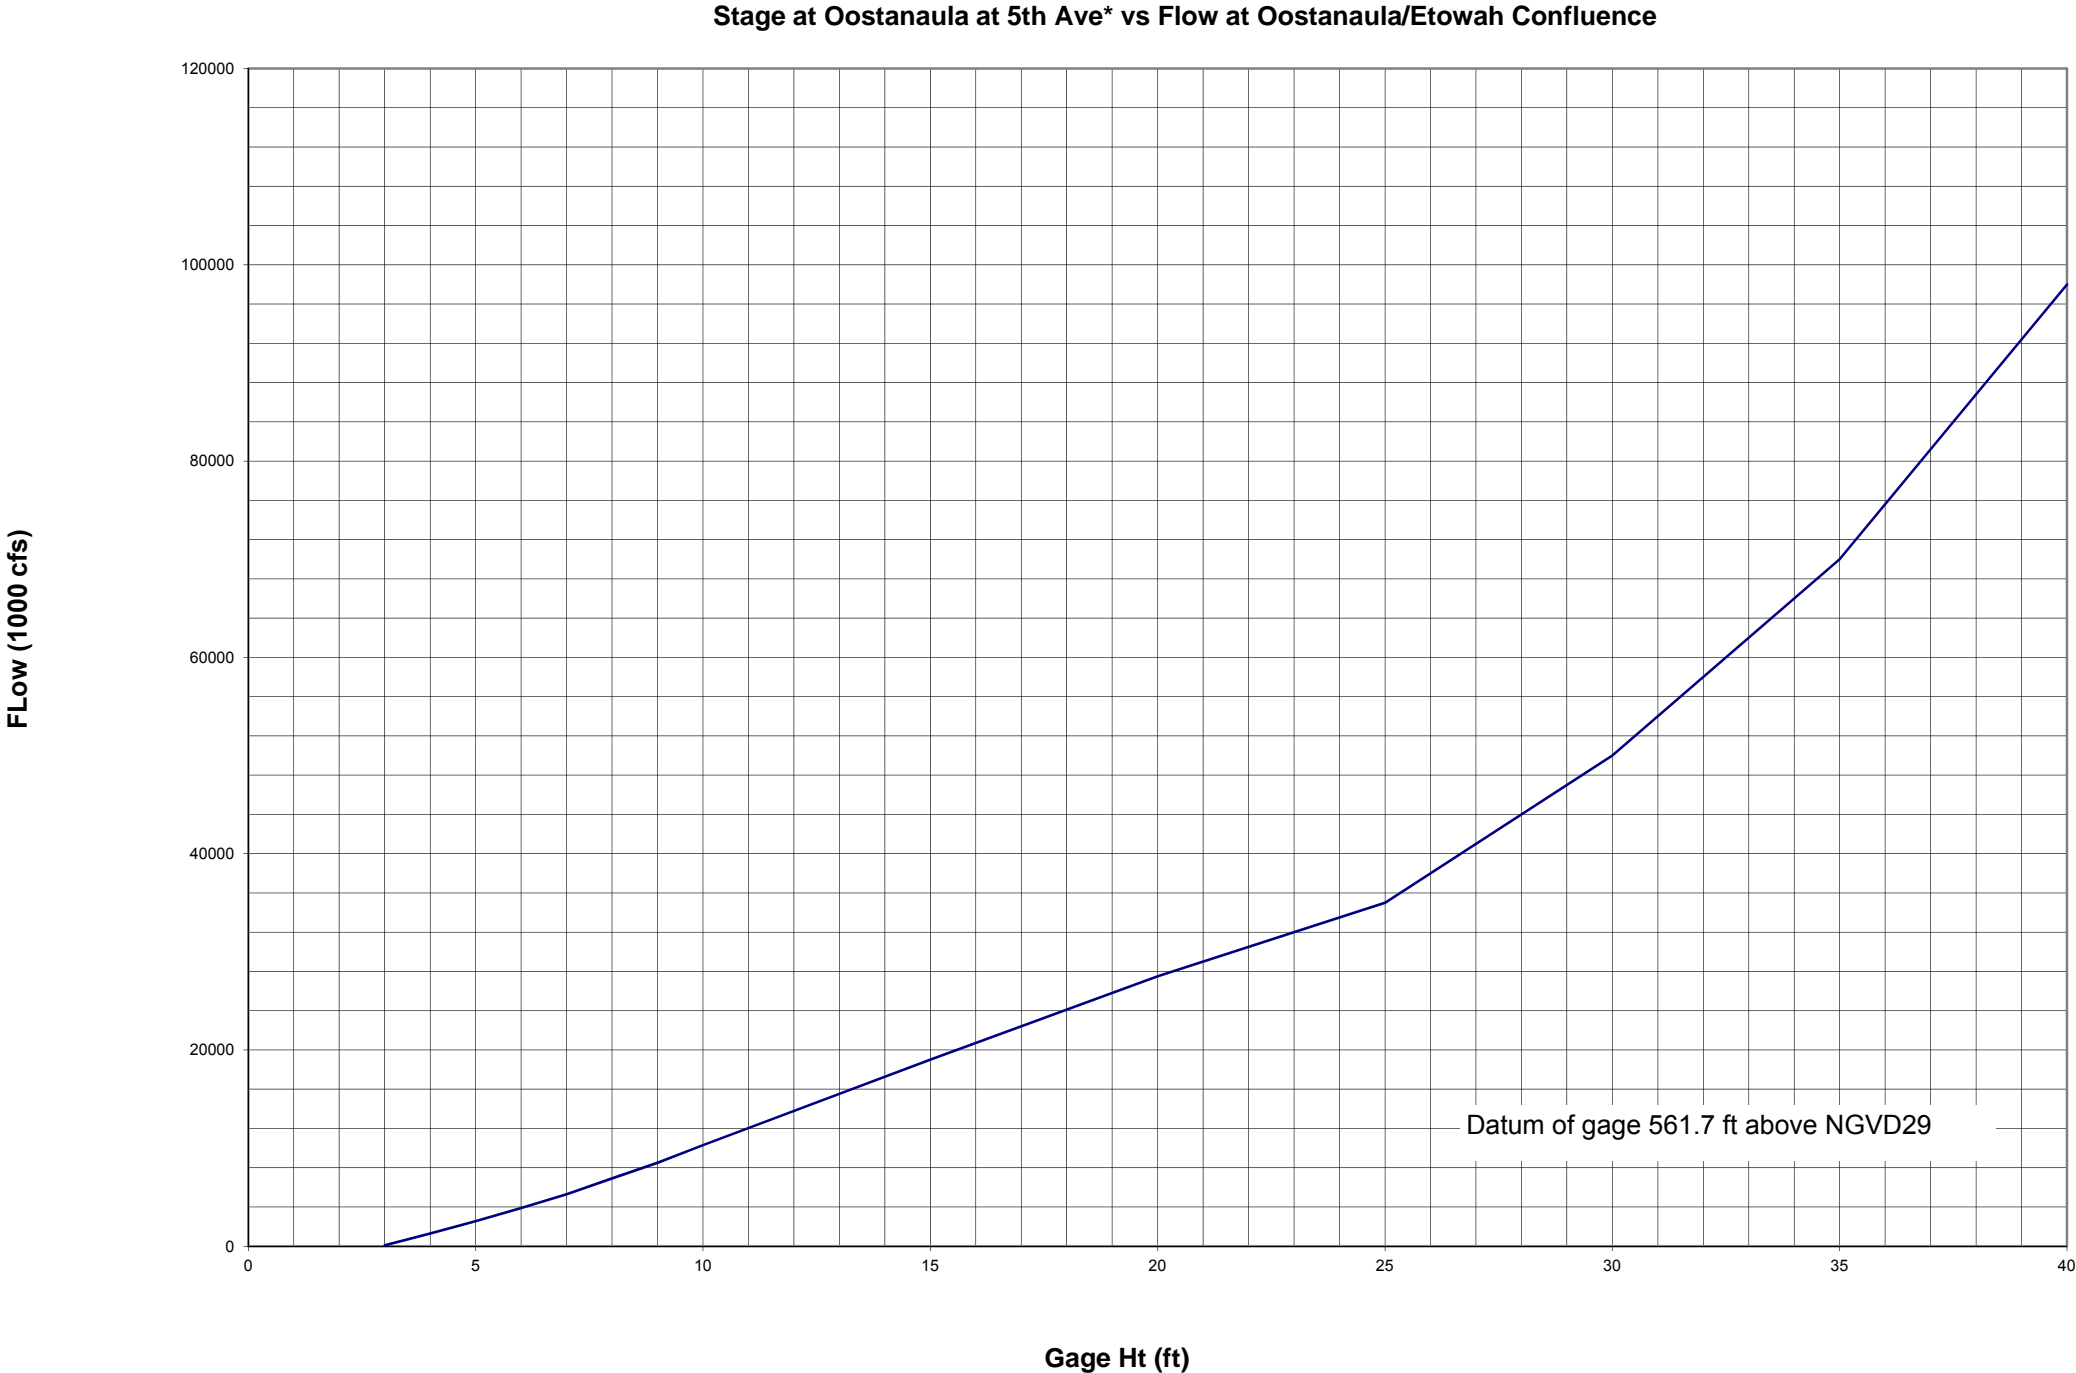

OOSTANAULA AT 5TH AVE vs STAGE AT OOSTANAULA/ETOWAH CONFLUENCE


FLOW (cfs)	GAGE HT (ft)
100	3
1300	4
2550	5
3900	6
5300	7
6900	8
8500	9
10300	10
19000	15
27500	20
35000	25
50000	30
70000	35
98000	40

* USGS 02388530 OOSTANAULA RIVER AT 5TH AVENUE, AT ROME, GA


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE


RELATION OF STAGE AT
OOSTANAULA RIVER AT 5TH AVE
TO FLOW AT CONFLUENCE OF
ETOWAH AND OOSTANAULA

Neely Henry Reservoir 1986 PMF

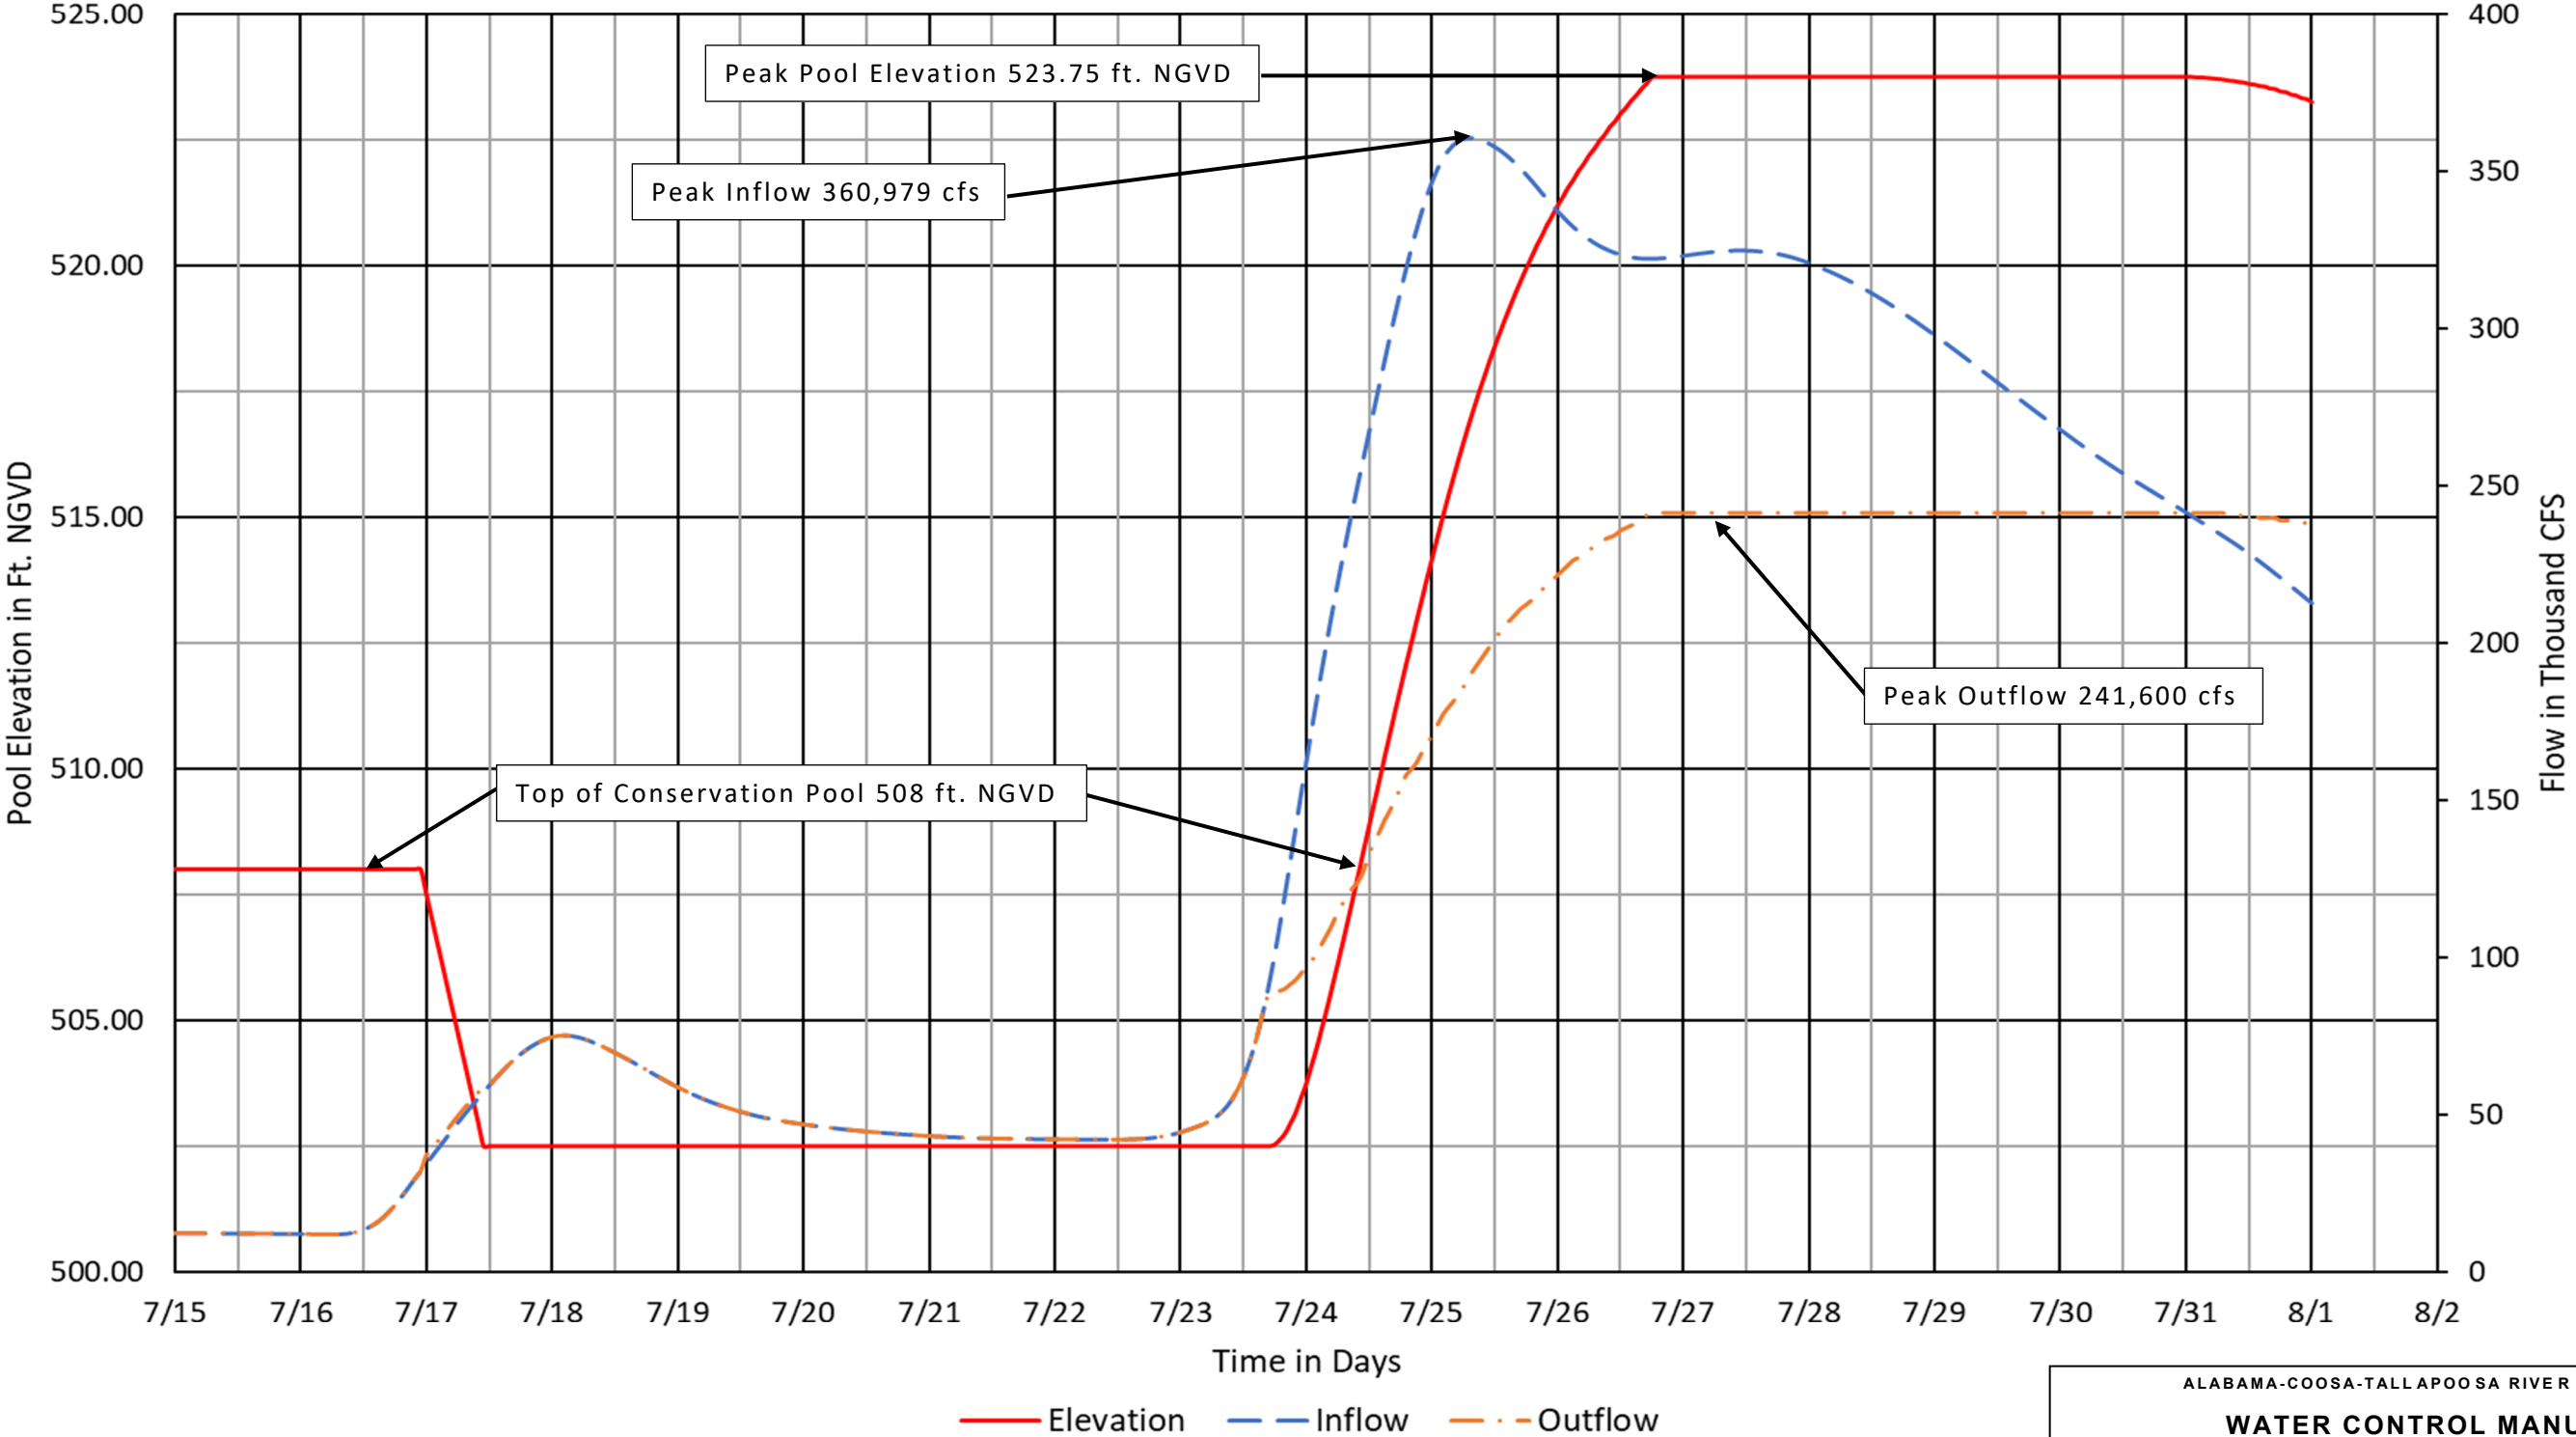

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY RESERVOIR
POOL ELEVATION- INFLOW- OUTFLOW
HYDROGRAPHS OF THE PROBABLE
MAXIMUM FLOOD FOR FLOOD OF 1986

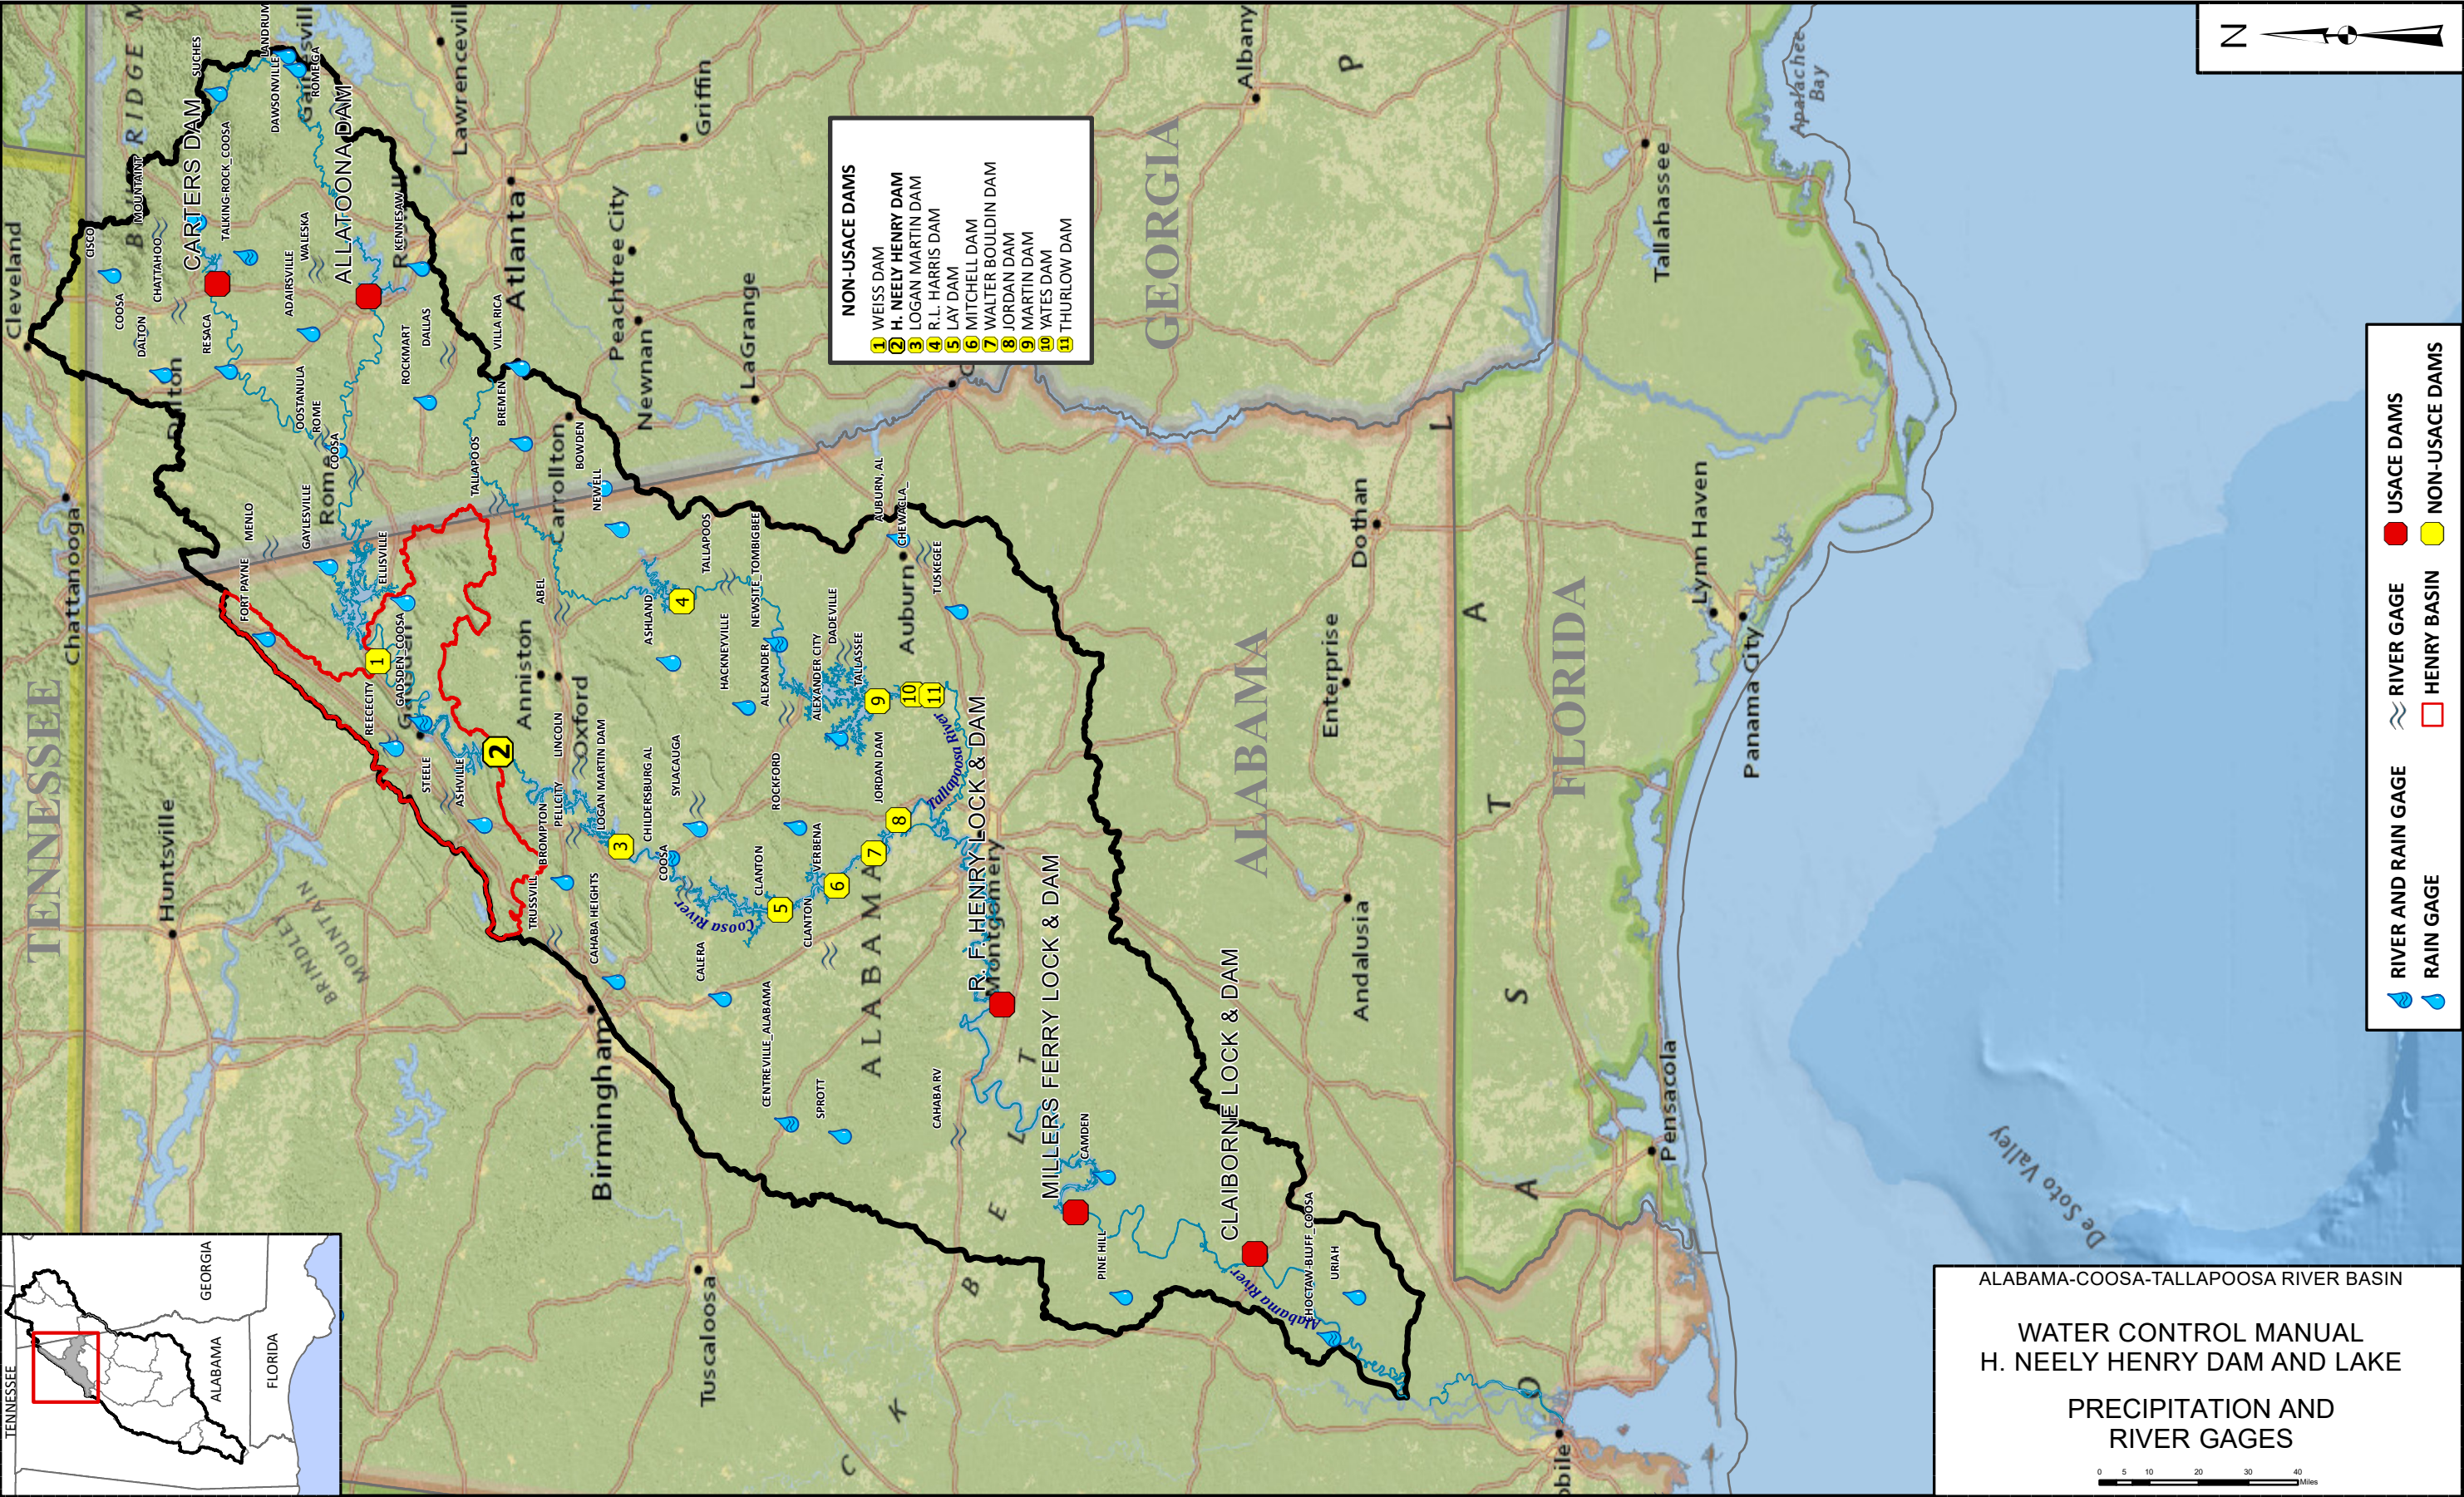

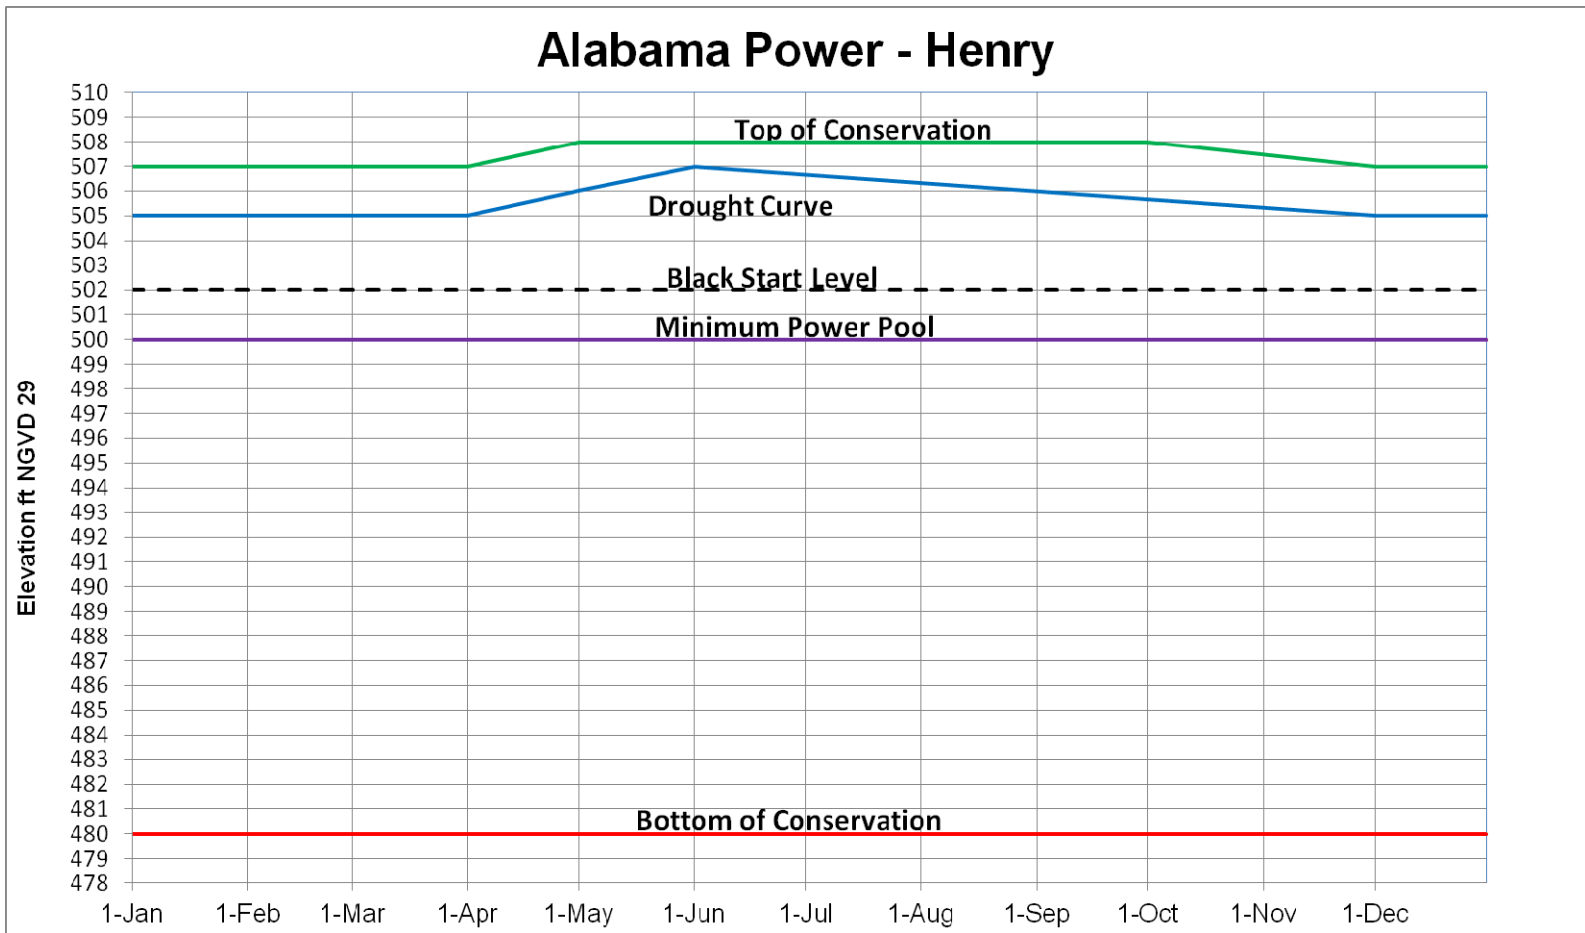


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE

GUIDE CURVE

Trigger Points	When Coosa River at Gadsden Steam Plant Rises Above	Reservoir Change	Evacuation Rate
1	508.00	No Change	N/A
2	508.50	508.00 to 507.00	1 foot in a 12 hour period
3	509.00	507.00 to 506.00	1 foot in a 12 hour period
4	509.50	506.00 to 505.00	1 foot in a 12 hour period
5	510.00	505.00 to 504.00	1 foot in a 12 hour period
6	510.50	504.00 to 503.00	1 foot in a 12 hour period
7	511.00	503.00 to 502.50	1/2 foot in a 12 hour period
	When Coosa River at Gadsden Steam Plant Lowers Below		
8	511.00	No Change	N/A
9	510.50	502.50 to 503.00	N/A
10	510.00	503.00 to 504.00	N/A
11	509.50	504.00 to 505.00	N/A
12	509.00	505.00 to 506.00	N/A
13	508.50	506.00 to 507.00	N/A
14	508.00	507.00 to 508.00	N/A
15	PRIORITY		The evacuation schedule above shall apply during refilling if conditions warrant.


*USGS Gage 02400496 – Coosa River at Gadsden Steam Plant near Gadsden, AL

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
 WATER CONTROL MANUAL
 H. NEELY HENRY DAM AND LAKE
**PRE-FLOOD EVACUATION
 SCHEDULE**

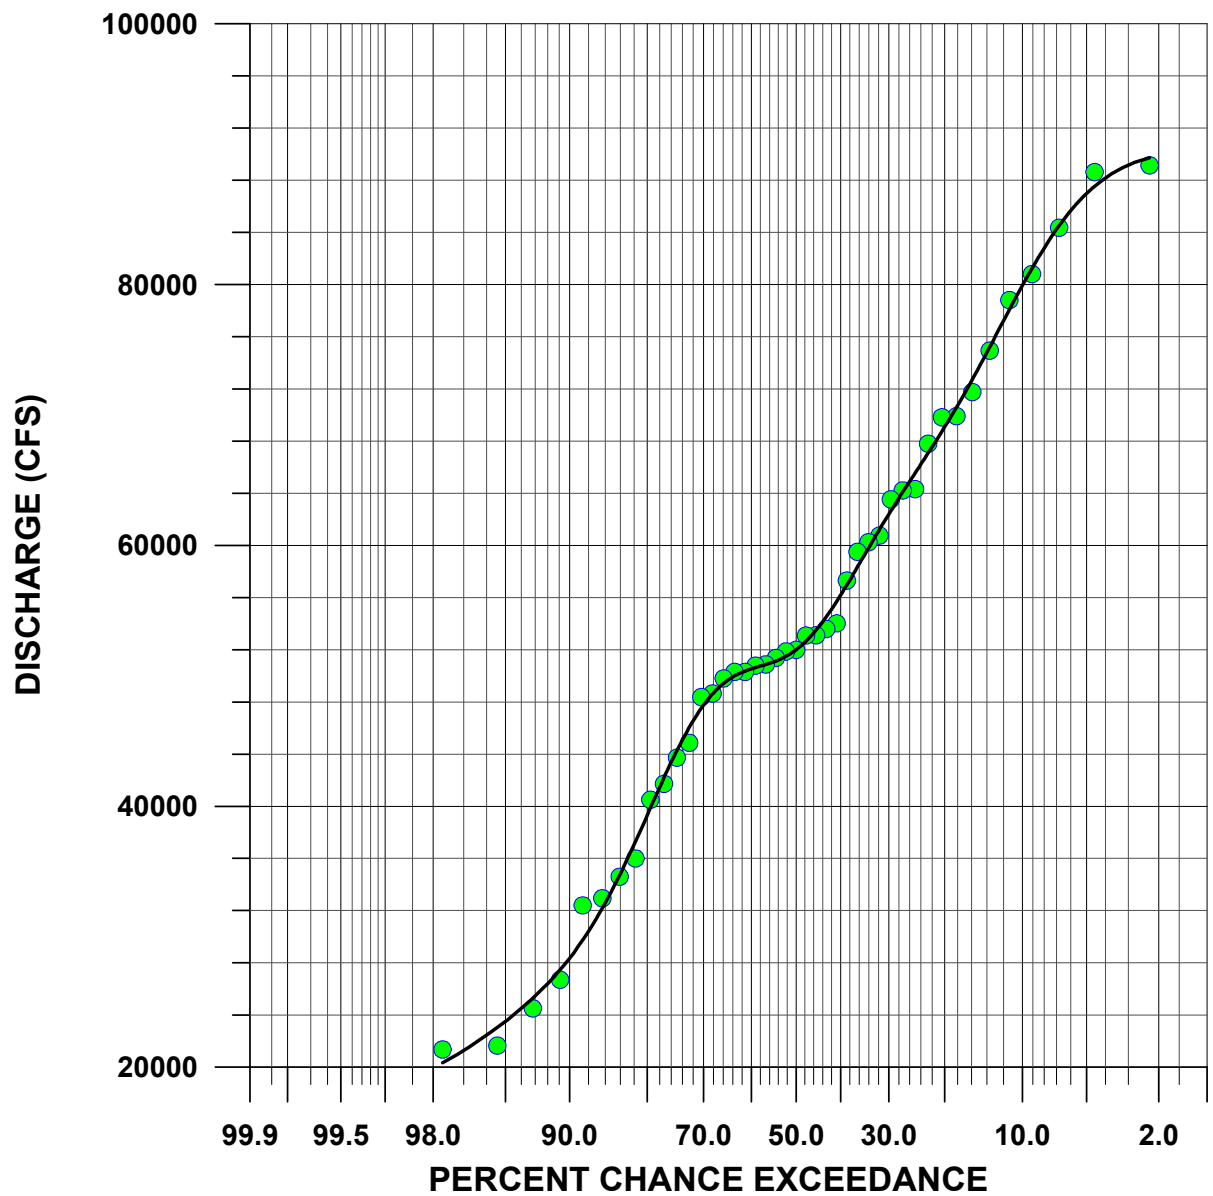


Data from APC
daily average values
from 1967 to 2009

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**DISCHARGE PERCENT CHANCE
EXCEEDANCE CURVE**

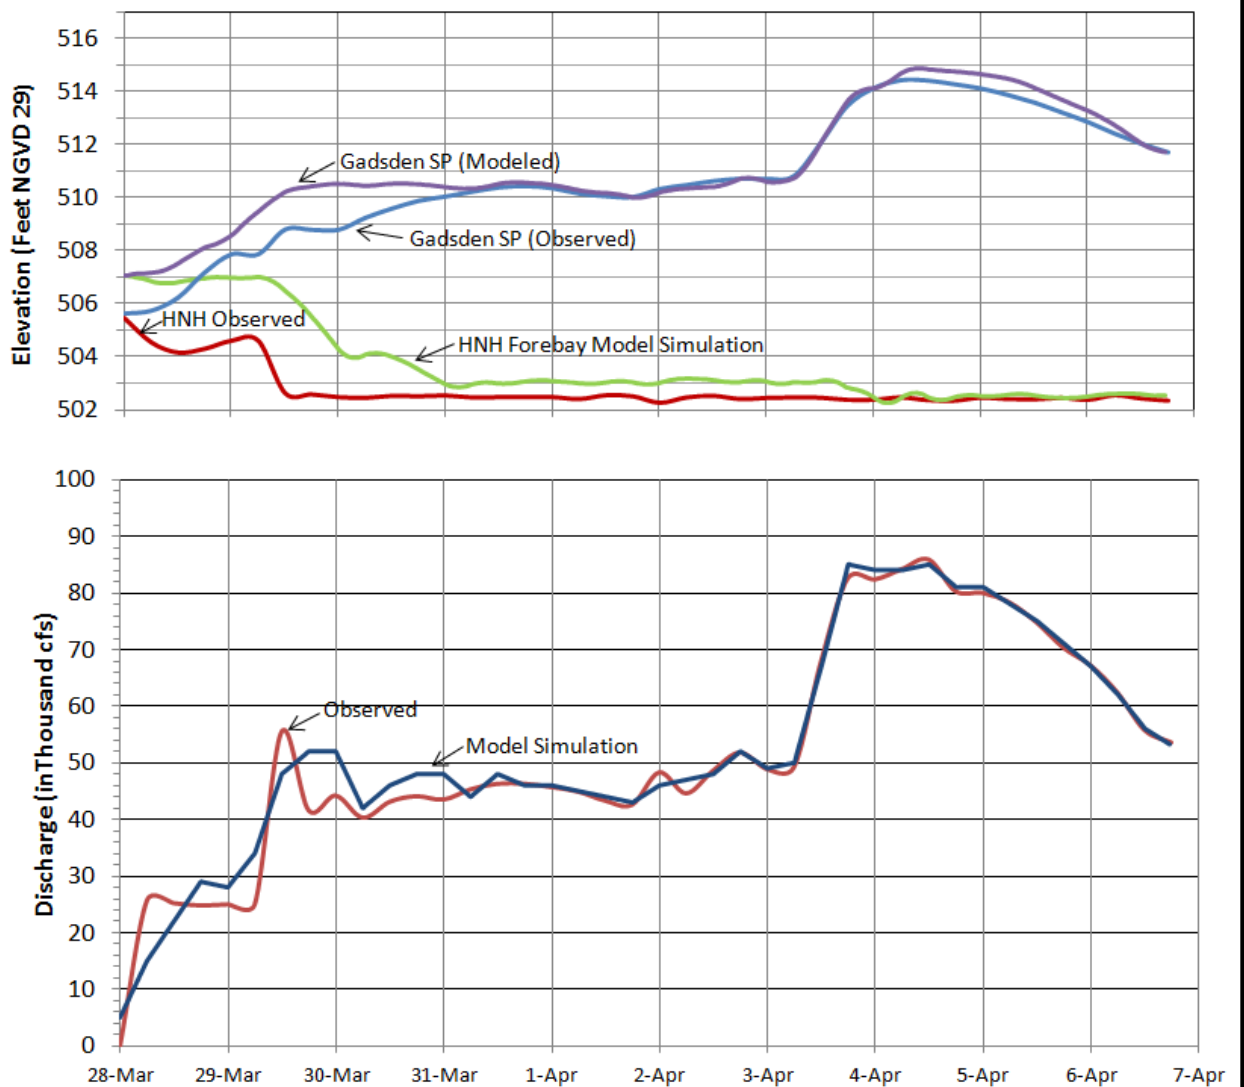H. Neely Henry Flood Routing (Mar - Apr 1977)


ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**OBSERVED VS MODELED ROUTING
FLOOD OF MARCH-APRIL 1977**

H. Neely Henry Flood Routing (Apr 1979)

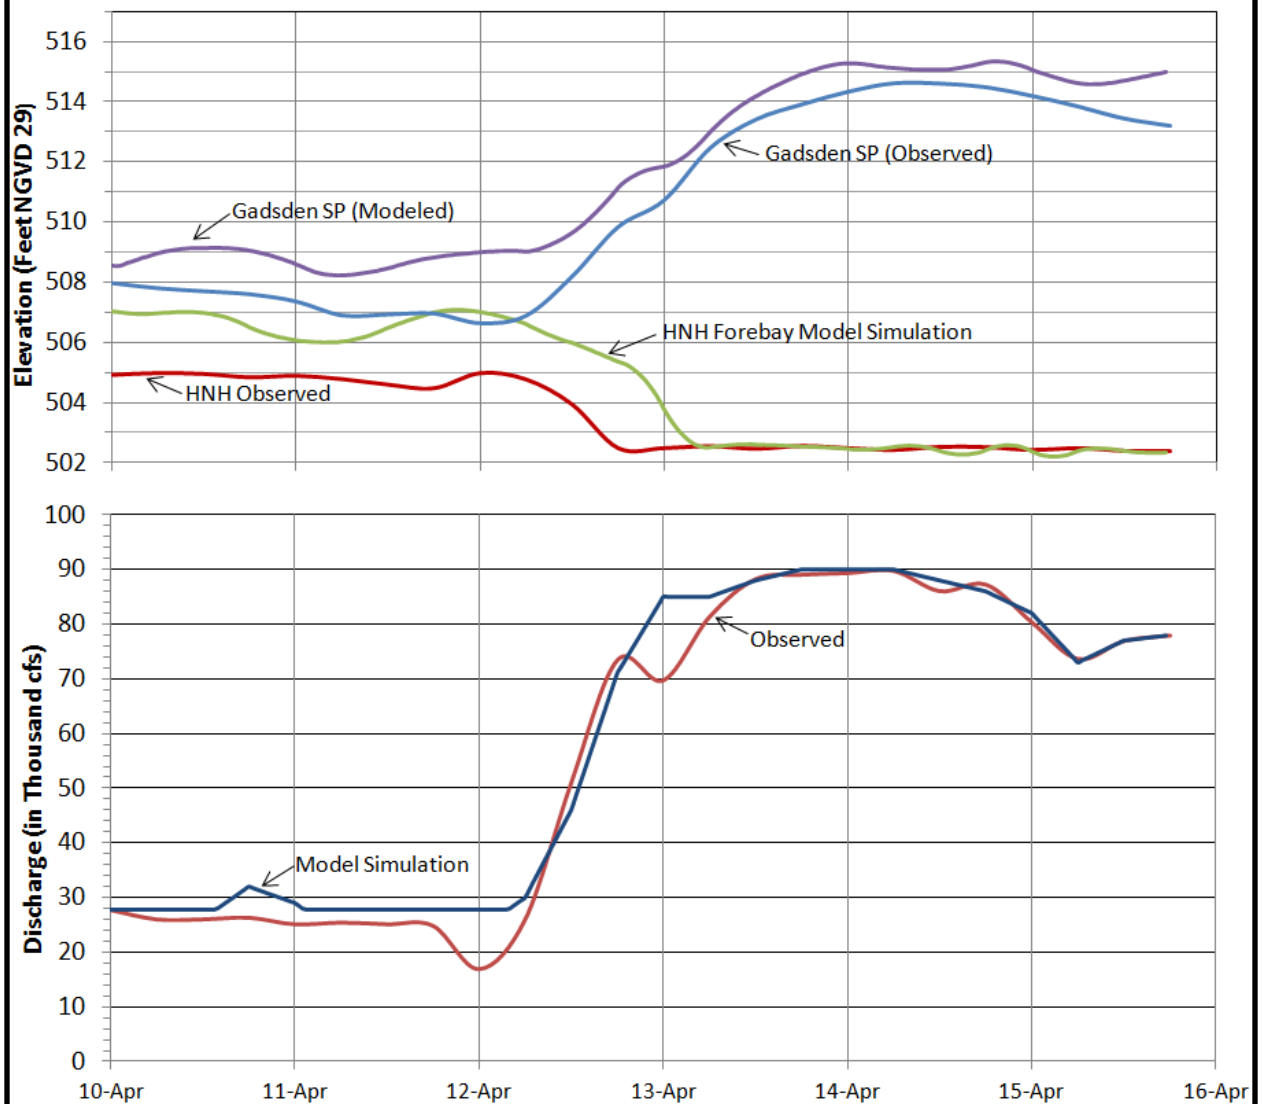

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**OBSERVED VS MODELED
ROUTING FLOOD OF APRIL 1979**


H. Neely Henry Flood Routing (Feb 1990)

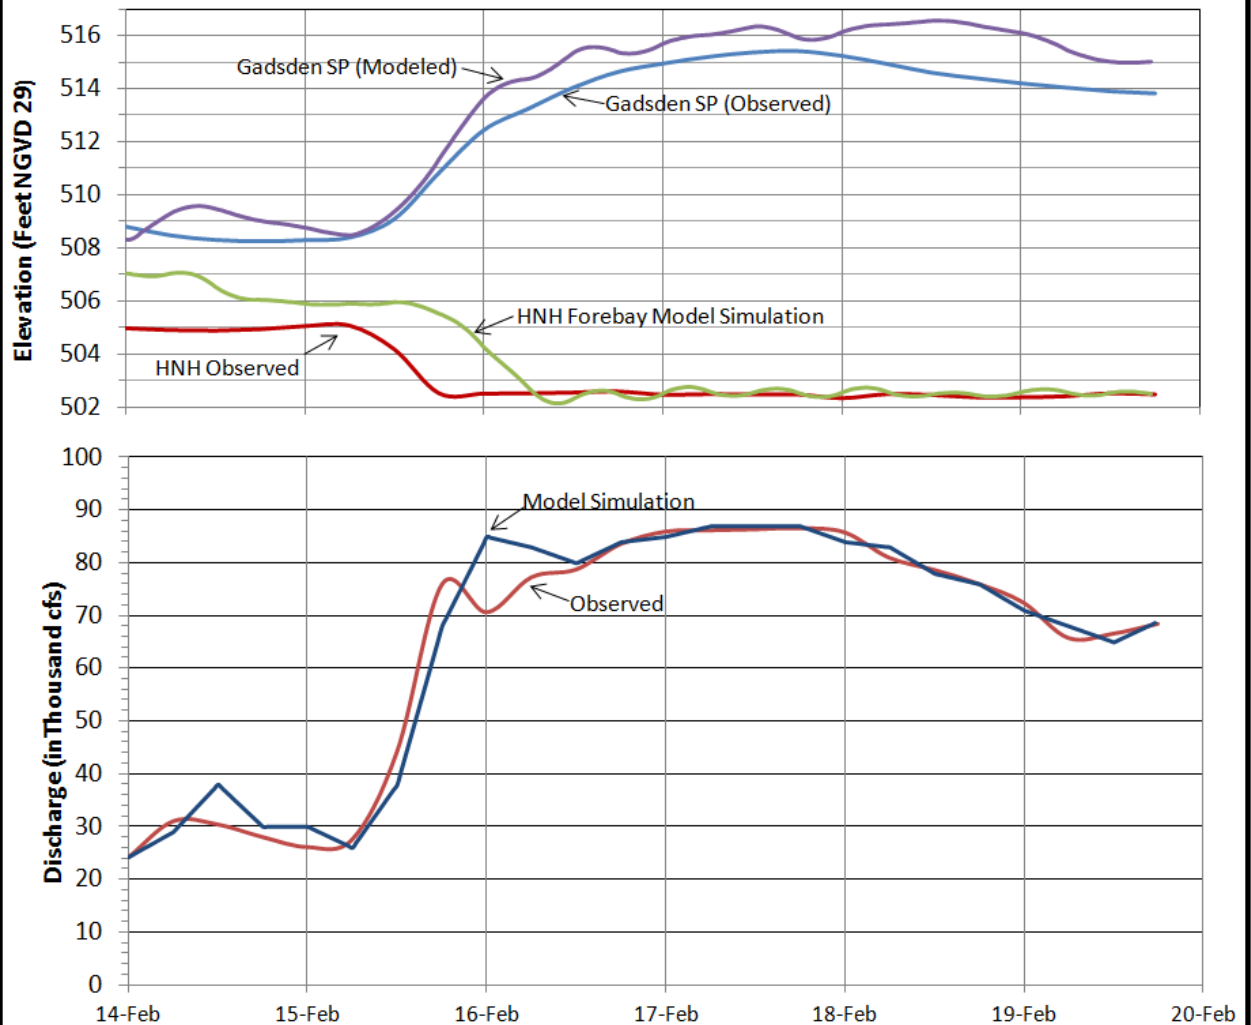

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE**OBSERVED VS MODELED ROUTING
FLOOD OF FEBRUARY 1990**


H. Neely Henry Flood Routing (Oct 1995)

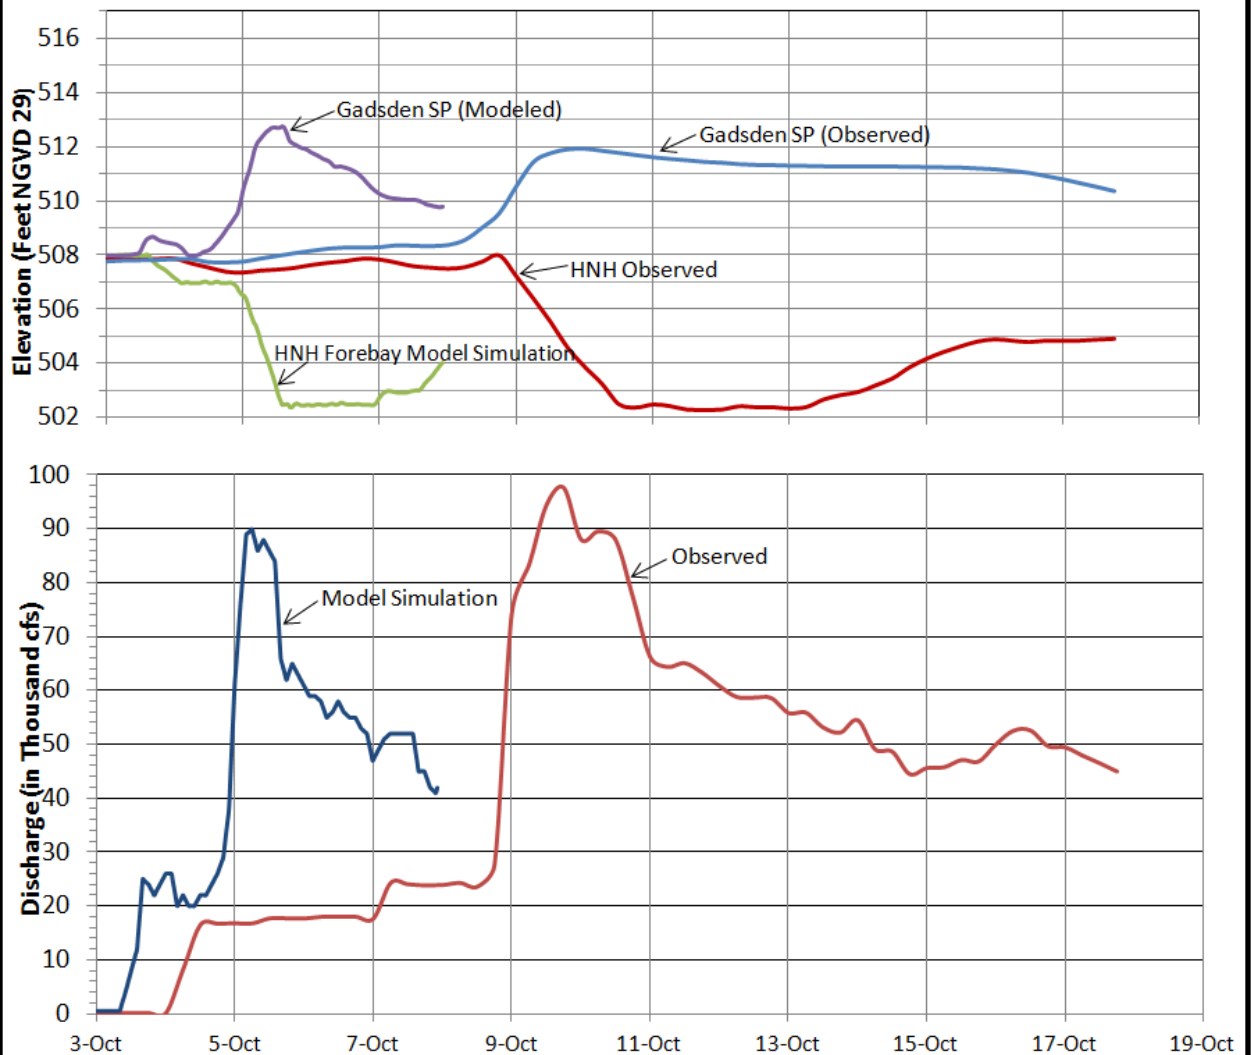

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN

WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE**OBSERVED VS MODELED ROUTING
FLOOD OF OCTOBER 1995**



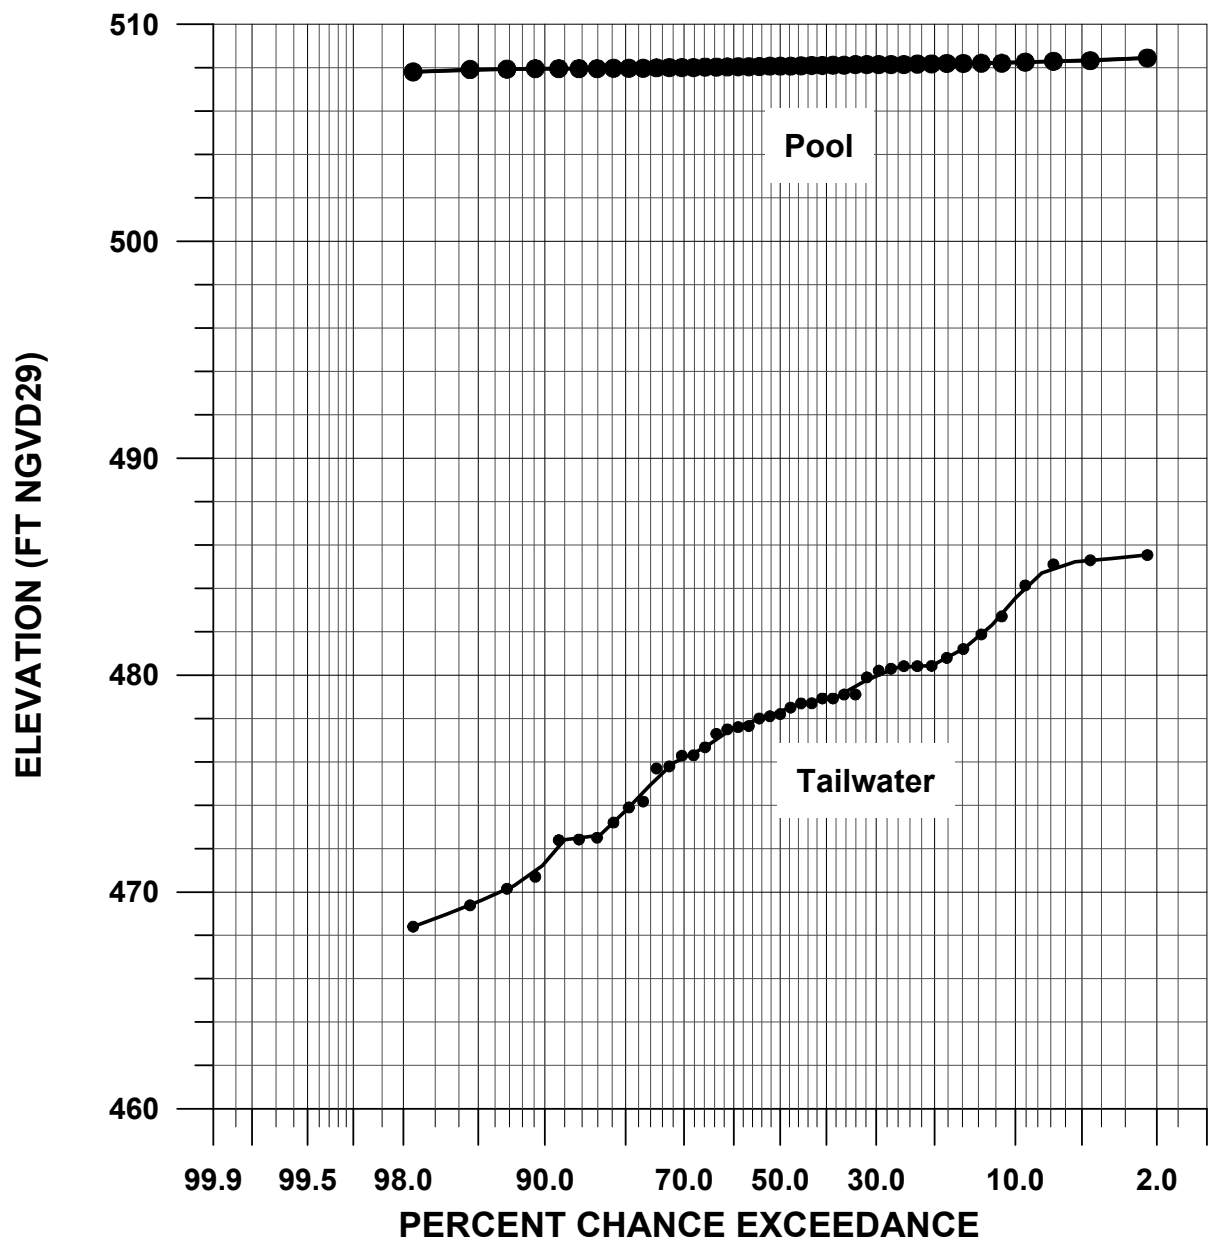

Data from APC midnight
instantaneous values from
1967 to 2009

ALABAMA-COOSA-TALLAPOOSA RIVER BASIN
WATER CONTROL MANUAL
H. NEELY HENRY DAM AND LAKE
**POOL-TAILWATER FREQUENCY
CURVES**