


# TYPE II MONITORING WELL INSTALLATION DIAGRAM

LAW ENVIRONMENTAL, INC.  
GOVERNMENT SERVICES DIVISION  
KENNESAW, GEORGIA

JOB NAME DDMT  
WELL NO. MW-9 JOB NO. 11-8531-01  
DATE 2-25-89 TIME             
WELL LOCATION DUNN FIELD

GROUND SURFACE ELEVATION <u>304.66</u> ft.	BENTONITE TYPE <u>EXTRA HIGH YIELD</u>
TOP OF SCREEN ELEVATION <u>234.56</u> ft.	MANUFACTURER <u>WYO-BEN</u>
REFERENCE POINT ELEVATION <u>304.66</u> ft.	CEMENT TYPE <u>PORTLAND TYPE 1</u>
TYPE SAND PACK <u>SILICA SAND</u> GRADATION <u>20/40</u>	MANUFACTURER <u>LONE STAR</u>
SAND PACK MANUFACTURER <u>GRANUSIL</u>	BOREHOLE DIAMETER <u>7 1/4"</u>
SCREEN MATERIAL <u>PVC SCHED 40</u>	SCREEN DIAMETER <u>2"</u> SLOT SIZE <u>0.010"</u>
MANUFACTURER <u>ATLANTIC SCREEN CO.</u>	LAW ENVIRONMENTAL, INC.
RISER MATERIAL <u>PVC SCHED 40</u>	FIELD REPRESENTATIVE <u>RM. FT</u>
MANUFACTURER <u>ATLANTIC SCREEN CO.</u>	DRILLING CONTRACTOR <u>TRI-STATE TESTING</u>
RISER DIAMETER <u>2"</u>	AMOUNT BENTONITE USED <u>1 BUCKET</u>
DRILLING TECHNIQUE <u>HOLLOW STEM AUGER</u>	AMOUNT CEMENT USED <u>10 BAGS @ 94lbs/BAG</u>
AUGER SIZE AND TYPE <u>7" CMF HOLLOW STEM AUGER</u>	AMOUNT SAND USED <u>1 BAGS @ 100lbs/BAG</u>
	STATIC WATER DEPTH (after dev.) <u>72.6'</u>

(NOT TO SCALE)

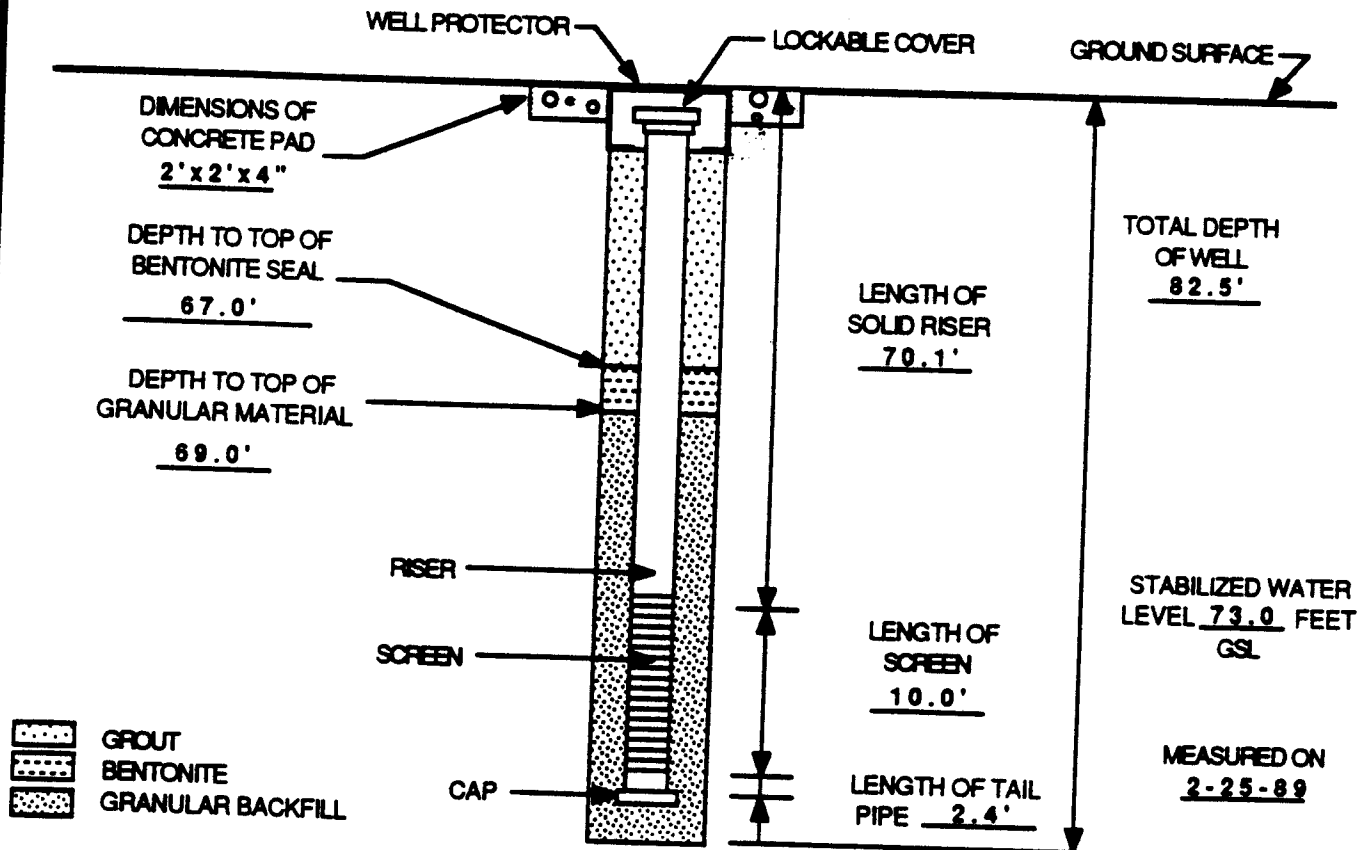

QA / QC

INSTALLED BY: JC INSTALLATION OBSERVED BY: RM. FT  
DISCREPANCIES: NONE