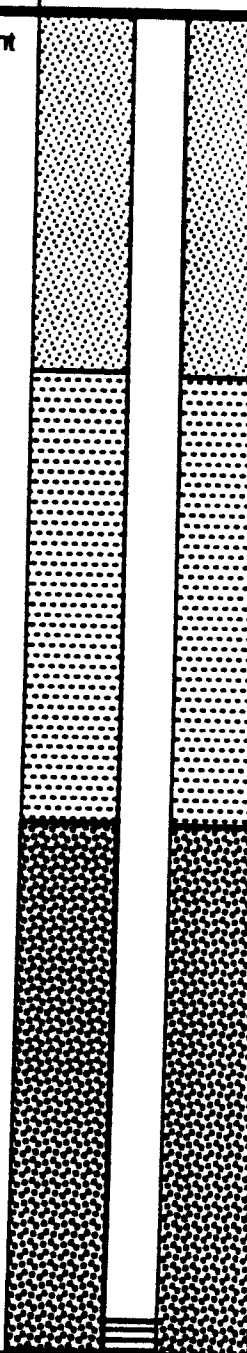


LAW ENVIRONMENTAL, INC.
GOVERNMENT SERVICES DIVISION

TEST BORING RECORD

BORING NUMBER <u> MW-29 </u> JOB NUMBER <u> 11-8531-01 </u> DATE STARTED <u> 11-7-89 </u> DATE COMPLETED <u> 11-7-89 </u> DRILLED BY <u> E. FLEMMING </u> LOGGED BY <u> P. VOGEL </u> CHECKED BY <u> F. THOMAS </u>	REMARKS: PAGE <u> 1 </u> OF <u> 2 </u> 7 7/8" Hollow Stem Auger Split Spoon Sampling
---	---

ELEV. IN FEET	DEPTH IN FEET	DESCRIPTION	MONITORING WELL CONSTRUCTION	SYM- BOLS	LAB TESTS	SPT N VALUE
273.35	0.0	Brown to reddish orange silty CLAY with trace amount of gravel, CL				
268.35						4
263.35						16
258.35						20
253.35	20.0	Reddish brown fine to medium grained clayey SAND to sandy CLAY, SC-CL				42
248.35	25.0	Orange fine to medium grained SAND, SP				31
243.35						35
238.35	35.0					33

LAW ENVIRONMENTAL, INC.
GOVERNMENT SERVICES DIVISION

TEST BORING RECORD

BORING NUMBER MW-29
JOB NUMBER 11-8531-01
DATE STARTED 11-7-89
DATE COMPLETED 11-7-89
DRILLED BY E. FLEMMING
LOGGED BY P. VOGEL
CHECKED BY F. THOMAS

REMARKS:

PAGE 2 OF 2

ELEV. IN FEET	DEPTH IN FEET	DESCRIPTION	MONITORING WELL CONSTRUCTION	SYM- BOLS	LAB TESTS	SPT N VALUE
	35.0	See previous page				
233.35	40.0	Orange sandy GRAVEL to fine to coarse grained gravelly SAND, SP			GS AL W	22
228.35						21
223.35						13
218.35						
216.85	56.5	Boring Terminated			GS AL W	13