


WELL CONSTRUCTION DETAILS AND ABANDONMENT FORM


FIELD REPRESENTATIVE: Chris Hickman TYPE OF FILTER PACK: DSI silica sand
 DRILLING CONTRACTOR: Boart Longyear GRADATION: #2
 AMOUNT OF FILTER PACK USED: 5 bags
 DRILLING TECHNIQUE: Sonic TYPE OF BENTONITE: DSI Petshur-Pel 3/8"
 AUGER SIZE AND TYPE: 6" O.D. AMOUNT BENTONITE USED: 1 - 50lb bucket
 BOREHOLE IDENTIFICATION: MW-63B TYPE OF GROUT: Cement bentonite
 BOREHOLE DIAMETER: 6" AMOUNT CEMENT USED: 10 bags
 WELL IDENTIFICATION: MW-63B GROUT MATERIALS USED: 2 1/2 bags bentonite powder
 WELL CONSTRUCTION START DATE: 7-24-02
 WELL CONSTRUCTION COMPLETE DATE: 7-25-02 DIMENSIONS OF SECURITY BOX: _____
 SCREEN MATERIAL: Sch 40 PVC TYPE OF WELL CAP: Expansion plug
 SCREEN DIAMETER: 2" TYPE OF END CAP: Flush thread cap
 SLOT SIZE (% Open Area): 10 slot
 STRATUM-SCREENED INTERVAL (FT): 115'-125' bgs COMMENTS: _____
 CASING MATERIAL: PVC
 CASING DIAMETER: 2"

SPECIAL CONDITIONS
(describe and draw)

Measuring Point: _____
 Elevation: _____



NOT TO SCALE

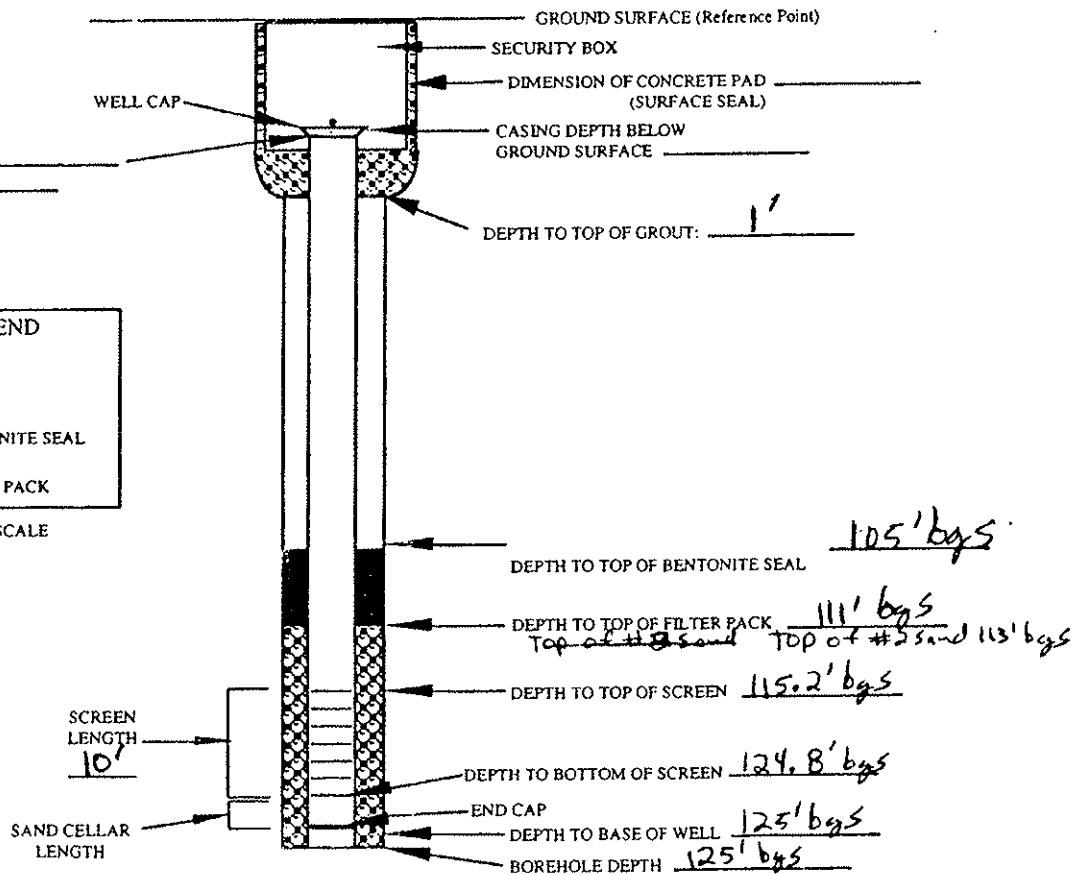

INSTALLED BY: Chris Wick INSTALLATION OBSERVED BY: K. Smith

DISCREPANCIES: _____